

# Transverse Particle Equations of Motion\*

Steven M. Lund

Lawrence Livermore National Laboratory (LLNL)

Steven M. Lund and John J. Barnard

USPAS: “Beam Physics with Intense Space-Charge”

UCB: “Interaction of Intense Charged Particle Beams  
with Electric and Magnetic Fields”

US Particle Accelerator School (USPAS)

University of California at Berkeley (UCB)

Nuclear Engineering Department NE 290H

Spring Semester, 2009

(Version 20090410)

\* Research supported by the US Dept. of Energy at LLNL and LBNL under contract Nos. DE-AC52-07NA27344 and DE-AC02-05CH11231.

# Transverse Particle Equations: Outline

- 1) Particle Equations of Motion
  - 2) Transverse Particle Equations of Motion in Linear Focusing Channels
  - 3) Description of Applied Focusing Fields
  - 4) Transverse Particle Equations of Motion with Nonlinear Applied Fields
  - 5) Transverse Particle Equations of Motion Without Space-Charge, Acceleration and Momentum Spread
  - 6) Floquet's Theorem and the Phase-Amplitude Form of Particle Orbits
  - 7) The Courant-Snyder Invariant and the Single-Particle Emittance
  - 8) The Betatron Formulation of the Particle Orbit
  - 9) Momentum Spread Effects
  - 10) Acceleration and Normalized Emittance
- References

# Particle Equations of Motion: Detailed Outline

## 1) Particle Equations of Motion

- A. Introduction: The Lorentz Force Equation
- B. Applied Fields
- C. Machine Lattice
- D. Self Fields
- E. Equation of Motion in  $s$  and the Paraxial Approximation
- F. Summary: Transverse Particle Equations of Motion
- G. Overview of Analysis to Come
- H. Bent Coordinate System and Particle Equations of Motion with Dipole Bends and Axial Momentum Spread

# Detailed Outline - 2

## 2) Transverse Particle Equations of Motion in Linear Focusing Channels

- A. Introduction
- B. Continuous Focusing
- C. Alternating Gradient Quadrupole Focusing – Electric Quadrupoles
- D. Alternating Gradient Quadrupole Focusing – Magnetic Quadrupoles
- E. Solenoidal Focusing
- F. Summary of Transverse Particle Equations of Motion

### Appendix A: Quadrupole Skew Coupling

### Appendix B: The Larmor Transform to Express Solenoidal Focused Particle Equations of Motion in Uncoupled Form

## 3) Description of Applied Focusing Fields

- A. Overview
- B. Magnetic Field Expansions for Focusing and Bending
- C. Hard Edge Equivalent Models
- D. 2D Transverse Multipole Magnetic Moments
- E. Good Field Radius
- F. Example Permanent Magnet Assemblies

## Detailed Outline - 3

### 4) Transverse Particle Equations of Motion with Nonlinear Applied Fields

- A. Overview
- B. Approach 1: Explicit 3D Form
- C. Approach 2: Perturbed Form

### 5) Linear Equations of Motion Without Space-Charge, Acceleration, and Momentum Spread

- A. Hill's equation
- B. Transfer Matrix Form of the Solution to Hill's Equation
- C. Wronskian Symmetry of Hill's Equation
- D. Stability of Solutions to Hill's Equation in a Periodic Lattice

## Detailed Outline - 4

### 6) Hill's Equation: Floquet's Theorem and the Phase-Amplitude Form of the Particle Orbit

- A. Introduction
- B. Floquet's Theorem
- C. Phase-Amplitude Form of the Particle Orbit
- D. Summary: Phase-Amplitude Form of the Solution to Hill's Equation
- E. Points on the Phase-Amplitude Formulation
- F. Relation Between the Principal Orbit Functions and the Phase-Amplitude Form Orbit Functions
- G. Undepressed Particle Phase Advance

### Appendix C: Calculation of $w(s)$ from Principal Orbit Functions

### 7) Hill's Equation: The Courant-Snyder Invariant and the Single-Particle Emittance

- A. Introduction
- B. Derivation of the Courant Snyder Invariant
- C. Lattice Maps

## Detailed Outline - 5

### 8) Hill's Equation: The Betatron Formulation of the Particle Orbit and Maximum Orbit Excursions

- A. Formulation
- B. Maximum Orbit Excursions

### 9) Momentum Spread Effects and Bending

- A. Overview
- B. Chromatic Effects
- C. Dispersive Effects

### 10) Acceleration and Normalized Emittance

- A. Introduction
- B. Transformation to Normal Form
- C. Phase-Space Relations between Transformed and Untransformed Systems

### Appendix D: Accelerating Fields and Calculation of Changes in $\gamma\beta$

Contact Information

References

Acknowledgments

# S1: Particle Equations of Motion

## S1A: Introduction: The Lorentz Force Equation

The *Lorentz force equation* of a charged particle is given by (SI Units):

$$\frac{d}{dt} \mathbf{p}_i(t) = q_i [\mathbf{E}(\mathbf{x}_i, t) + \mathbf{v}_i(t) \times \mathbf{B}(\mathbf{x}_i, t)]$$

$m_i, q_i$  .... particle mass, charge  $i =$  particle index

$\mathbf{x}_i(t)$  .... particle coordinate  $t =$  time

$\mathbf{p}_i(t) = m\gamma_i(t)\mathbf{v}_i(t)$  .... particle momentum

$\mathbf{v}_i(t) = \frac{d}{dt} \mathbf{x}_i(t) = c\vec{\beta}_i(t)$  .... particle velocity

$\gamma_i(t) = \frac{1}{\sqrt{1 - \beta_i^2(t)}}$  .... particle gamma factor


	<u>Total</u>	=	<u>Applied</u>	+	<u>Self</u>
Electric Field:	$\mathbf{E}(\mathbf{x}, t)$	=	$\mathbf{E}^a(\mathbf{x}, t)$	+	$\mathbf{E}^s(\mathbf{x}, t)$
Magnetic Field:	$\mathbf{B}(\mathbf{x}, t)$	=	$\mathbf{B}^a(\mathbf{x}, t)$	+	$\mathbf{B}^s(\mathbf{x}, t)$




# S1B: Applied Fields used to Focus, Bend, and Accelerate Beam

## Transverse Focusing Optics for focusing:


### Electric Quadrupole

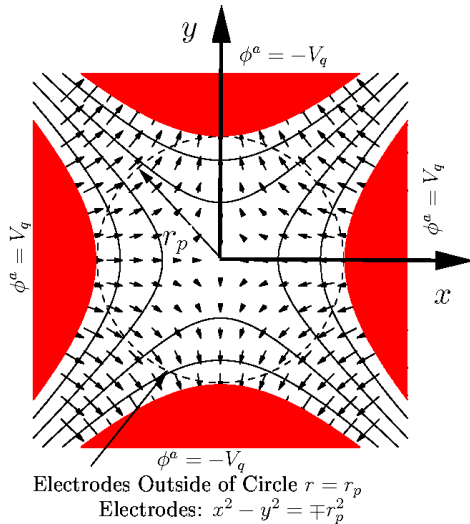

### Magnetic Quadrupole

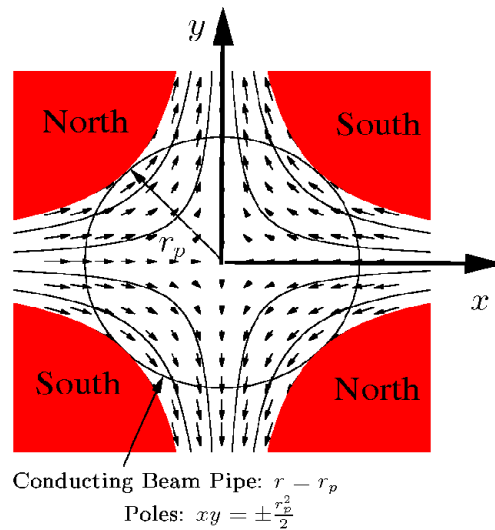


### Solenoid

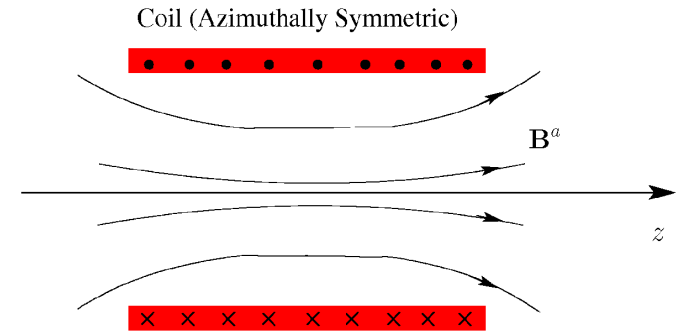


## Dipole Bends:

### Electric x-direction bend

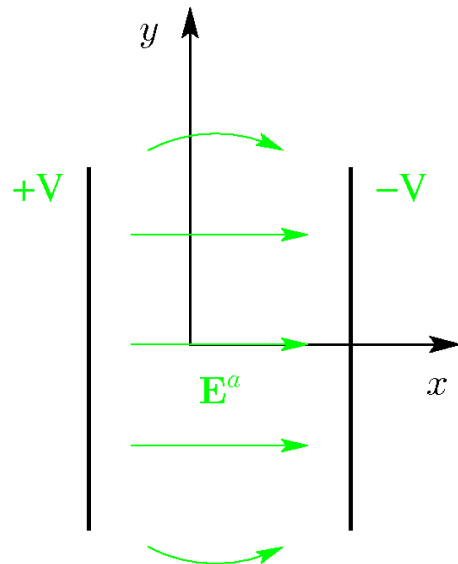


### Magnetic x-direction bend

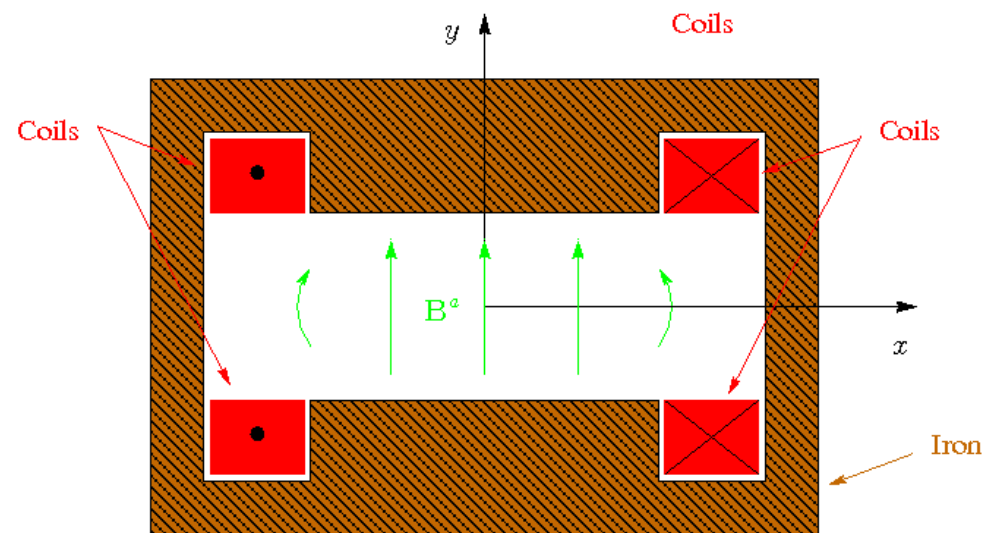


# Longitudinal Acceleration:

## RF Cavity

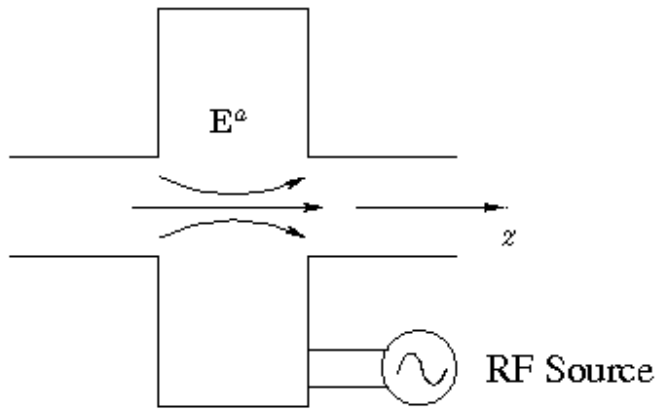


## Induction Cell

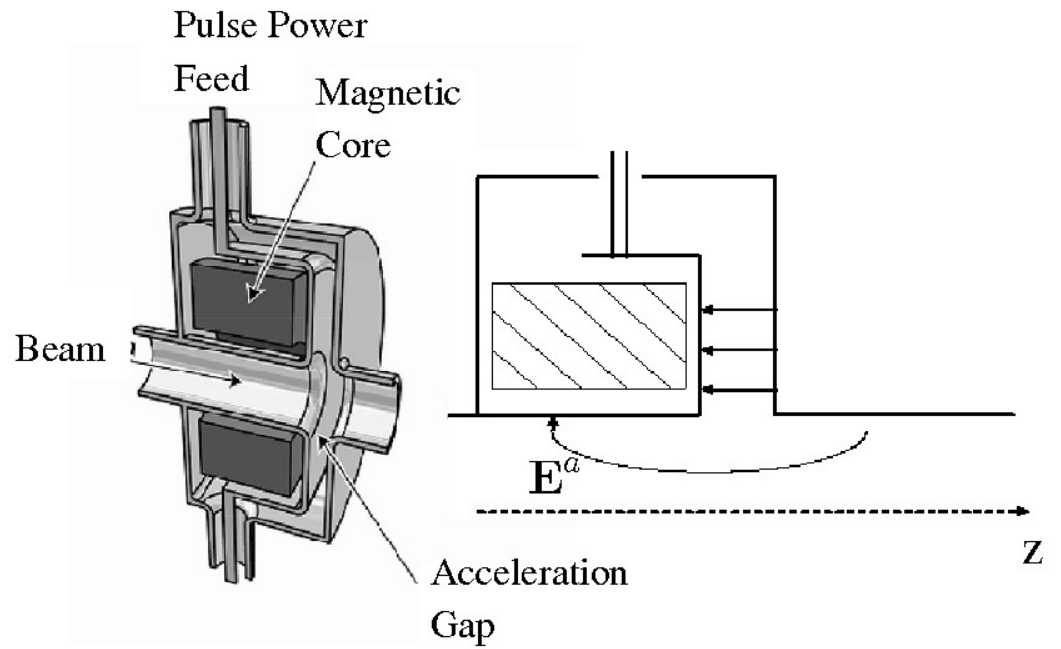


# S1C: Machine Lattice

Applied field structures are often arranged in a regular (periodic) lattice for beam transport/acceleration:

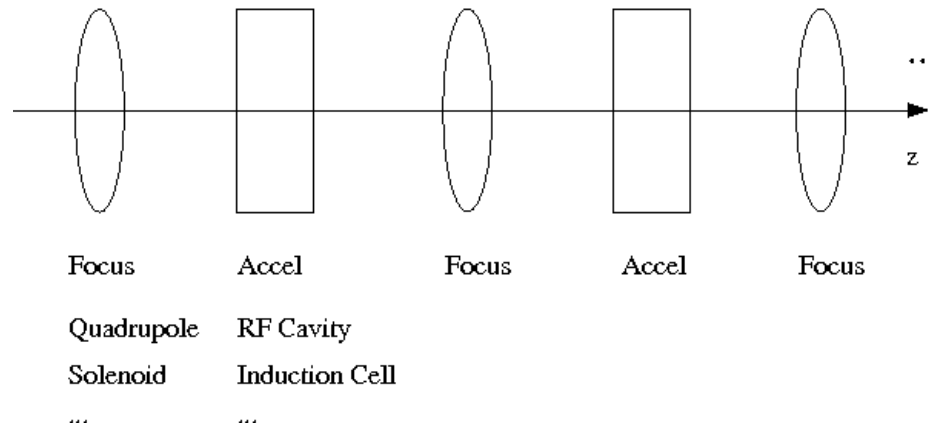


- ▶ Sometimes functions like bending/focusing are combined into a single element

Example – Linear FODO lattice (symmetric quadrupole doublet)

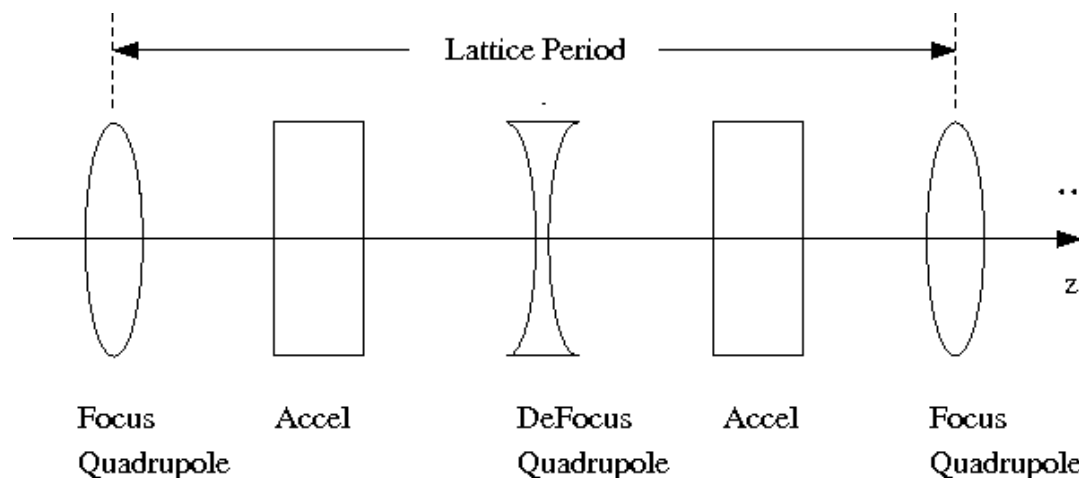

Lattices for rings and some beam insertion/extraction sections also incorporate bends and more complicated periodic structures:

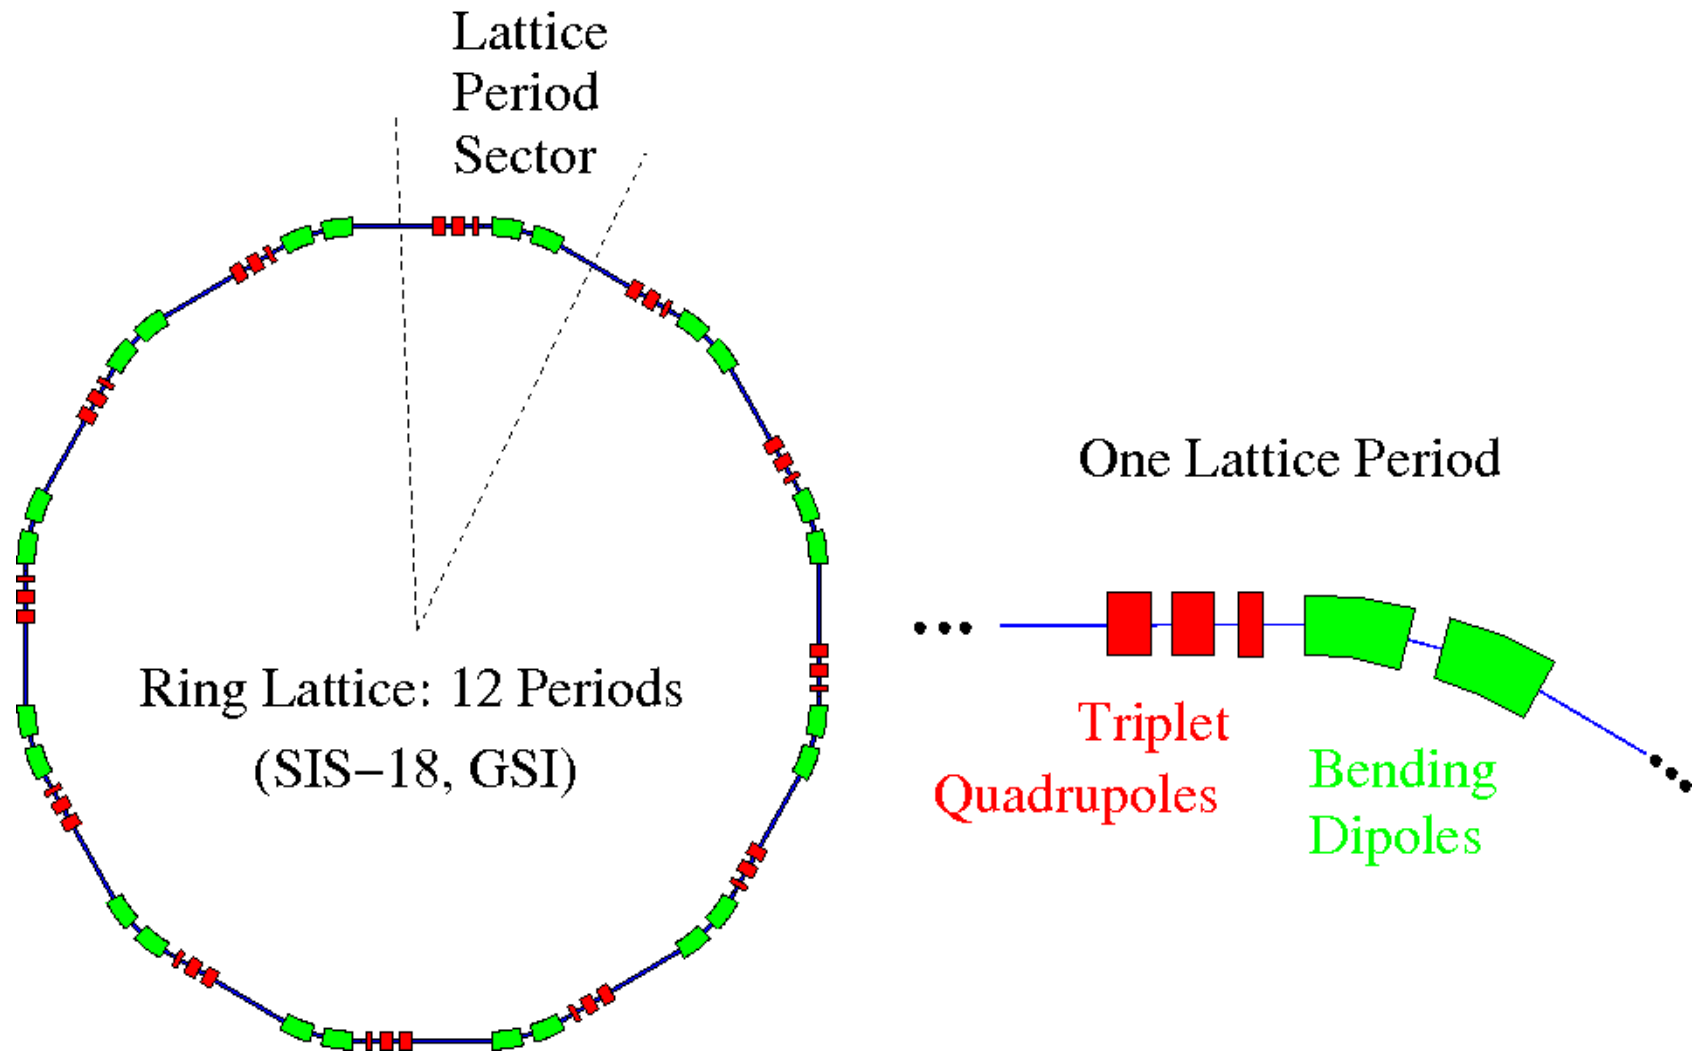

- ♦ Lattices to insert beam into and out of ring further complicate
- ♦ Acceleration cells also present  
(typically several RF cavities at one or more location)


# S1D: Self fields

Self-fields are generated by the distribution of beam particles:

- ◆ Charges
- ◆ Currents

## Particle at Rest

(pure electrostatic)


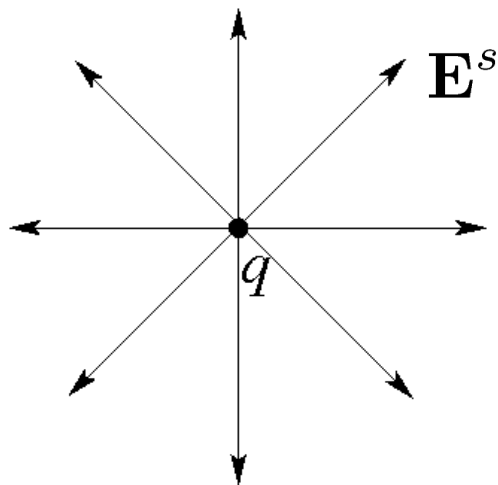


$$\mathbf{B}^s = 0$$

- ◆ Superimpose for all particles in the beam distribution
- ◆ Accelerating particles also radiate
  - We neglect electromagnetic radiation in this class (see: J.J. Barnard, [Intro Lectures](#))

## Particle in Motion

Obtain from  
Lorentz boost  
of rest-frame field:  
see Jackson,  
*Classical  
Electrodynamics*

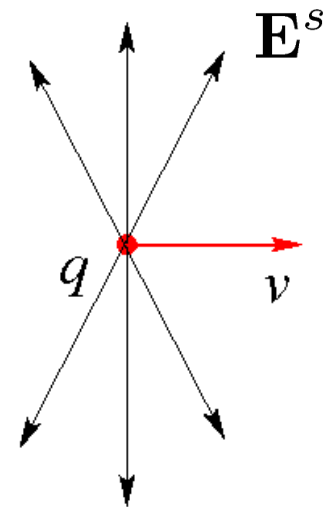

The electric ( $\mathbf{E}$ ) and magnetic ( $\mathbf{B}$ ) fields satisfy the **Maxwell Equations**. The linear structure of the Maxwell equations can be exploited to resolve the field into **Applied** and **Self-Field** components:

$$\mathbf{E} = \mathbf{E}^a + \mathbf{E}^s$$

$$\mathbf{B} = \mathbf{B}^a + \mathbf{B}^s$$

**Applied Fields** (often quasi-static)  $\mathbf{E}^a, \mathbf{B}^a$

♦ Generated by elements in lattice

$$\begin{aligned} \nabla \cdot \mathbf{E}^a &= \frac{\rho^a}{\epsilon_0} & \nabla \times \mathbf{B}^a &= \mu_0 \mathbf{J}^a + \frac{1}{c^2} \frac{\partial}{\partial t} \mathbf{E}^a \\ \nabla \times \mathbf{E}^a &= -\frac{\partial}{\partial t} \mathbf{B}^a & \nabla \cdot \mathbf{B}^a &= 0 \end{aligned}$$

$\rho^a$  = applied charge density       $\frac{1}{\mu_0 \epsilon_0} = c^2$   
 $\mathbf{J}^a$  = applied current density

+ Boundary Conditions on  $\mathbf{E}^a$  and  $\mathbf{B}^a$

- ♦ Boundary conditions depend on the total fields  $\mathbf{E}, \mathbf{B}$  and if separated into Applied and Self-Field components, care can be required
- ♦ System often solved as static boundary value problem and source free in the region of the beam

/// Aside: Notation:

$$\nabla \equiv \hat{\mathbf{x}} \frac{\partial}{\partial x} + \hat{\mathbf{y}} \frac{\partial}{\partial y} + \hat{\mathbf{z}} \frac{\partial}{\partial z} \quad - \text{Cartesian Representation}$$

$$= \hat{\mathbf{r}} \frac{\partial}{\partial r} + \frac{\hat{\theta}}{r} \frac{\partial}{\partial \theta} + \hat{\mathbf{z}} \frac{\partial}{\partial z} \quad - \text{Cylindrical Representation} \quad \begin{array}{l} x = r \cos \theta \\ y = r \sin \theta \end{array}$$

$$= \frac{\partial}{\partial \mathbf{x}} \quad - \text{Abbreviated Representation}$$

$$= \frac{\partial}{\partial \mathbf{x}_{\perp}} + \hat{\mathbf{z}} \frac{\partial}{\partial z} \quad - \text{Resolved Abbreviated Representation}$$

Resolved into Perpendicular ( $\perp$ )  
and Parallel ( $z$ ) components

$$\begin{aligned} \mathbf{x} &= \hat{\mathbf{x}}x + \hat{\mathbf{y}}y + \hat{\mathbf{z}}z & \mathbf{x}_{\perp} &\equiv \hat{\mathbf{x}}x + \hat{\mathbf{y}}y \\ &= \mathbf{x}_{\perp} + \hat{\mathbf{z}}z \end{aligned}$$

In integrals, we denote:

$$\int d^3x \cdots = \int_{-\infty}^{\infty} dx \int_{-\infty}^{\infty} dy \int_{-\infty}^{\infty} dz \cdots = \int d^2x_{\perp} \int dz \cdots$$

$$\int d^2x_{\perp} \cdots = \int_{-\infty}^{\infty} dx \int_{-\infty}^{\infty} dy \cdots = \int_0^{\infty} dr r \int_{-\pi}^{\pi} d\theta \cdots$$

///

## Self-Fields (dynamic, evolve with beam)

- Generated by particles in the beam

$$\nabla \cdot \mathbf{E}^s = \frac{\rho^s}{\epsilon_0} \qquad \nabla \times \mathbf{B}^s = \mu_0 \mathbf{J}^s + \frac{1}{c^2} \frac{\partial}{\partial t} \mathbf{E}^s$$

$$\nabla \times \mathbf{E}^s = -\frac{\partial}{\partial t} \mathbf{B}^s \qquad \nabla \cdot \mathbf{B}^s = 0$$

$\rho^s$  = beam charge density

$$= \sum_{i=1}^N q_i \delta[\mathbf{x} - \mathbf{x}_i(t)]$$

$\mathbf{J}^s$  = beam current density

$$= \sum_{i=1}^N q_i \mathbf{v}_i(t) \delta[\mathbf{x} - \mathbf{x}_i(t)]$$

$i$  = particle index  
( $N$  particles)

$q_i$  = particle charge

$\mathbf{x}_i$  = particle coordinate

$\mathbf{v}_i$  = particle velocity

$$\delta(\mathbf{x}) \equiv \delta(x)\delta(y)\delta(z)$$

$\delta(x)$   $\equiv$  Dirac-delta function

$$\sum_{i=1}^N \dots = \text{sum over beam particles}$$

+ Boundary Conditions on  $\mathbf{E}^s$  and  $\mathbf{B}^s$   
from material structures, radiation conditions, etc.




In accelerators, there is ideally a **single species of particle**:

$$\begin{array}{l} q_i \rightarrow q \\ m_i \rightarrow m \end{array}$$

**Large Simplification!**

Multi-species results in more complex collective effects

Motion of particles within axial slices of the “bunch” are **highly directed**:

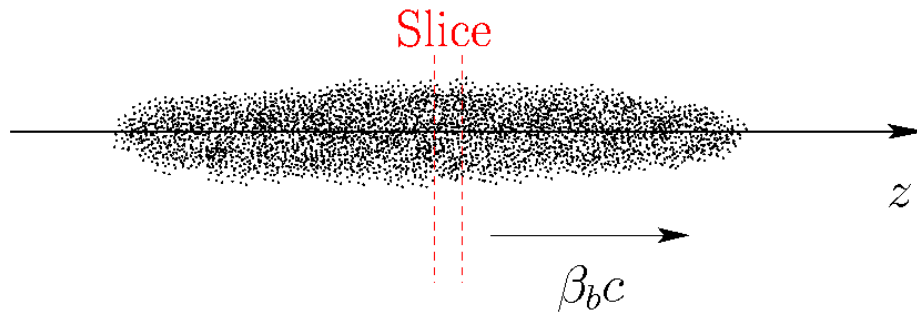

$$\beta_b(z)c \equiv \frac{1}{N'} \sum_{i=1}^{N'} \mathbf{v}_i \cdot \hat{\mathbf{z}}$$

= Mean axial velocity of  
 $N'$  particles in beam slice

$$\frac{d}{dt} \mathbf{x}_i(t) = \mathbf{v}_i(t) = \hat{\mathbf{z}} \beta_b(z)c + \delta \mathbf{v}_i$$

$$|\delta \mathbf{v}_i| \ll |\beta_b|c \quad \text{Paraxial Approximation}$$

There are typically **many particles**:

$$\rho^s = \sum_{i=1}^N q_i \delta[\mathbf{x} - \mathbf{x}_i(t)]$$

$$\simeq \rho(\mathbf{x}, t) \quad \text{continuous charge-density}$$

$$\mathbf{J}^s = \sum_{i=1}^N q_i \mathbf{v}_i(t) \delta[\mathbf{x} - \mathbf{x}_i(t)]$$

$$\simeq \beta_b c \rho(\mathbf{x}, t) \hat{\mathbf{z}} \quad \text{continuous axial current-density}$$

The beam evolution is typically **sufficiently slow** (for heavy ions) where we can **neglect radiation** and approximate the self-field Maxwell Equations as:

♦ See: J. J. Barnard, **Intro. Lectures: Electrostatic Approximation**

$$\mathbf{E}^s = -\nabla\phi$$

$$\mathbf{B}^s = \nabla \times \mathbf{A} \quad \mathbf{A} = \hat{\mathbf{z}} \frac{\beta_b}{c} \phi$$

$$\nabla^2 \phi = \frac{\partial}{\partial \mathbf{x}} \cdot \frac{\partial}{\partial \mathbf{x}} \phi = -\frac{\rho^s}{\epsilon_0}$$

+ Boundary Conditions on  $\phi$

Vast Reduction of  
self-field model:

But still complicated!

Resolve the **Lorentz force** acting on beam particles into **Applied** and **Self-Field** terms:

$$\mathbf{F}_i(\mathbf{x}_i, t) = q\mathbf{E}(\mathbf{x}_i, t) + q\mathbf{v}_i(t) \times \mathbf{B}(\mathbf{x}_i, t)$$

$$\mathbf{F}_i = \mathbf{F}_i^a + \mathbf{F}_i^s$$

$$\mathbf{E} = \mathbf{E}^a + \mathbf{E}^s$$

$$\mathbf{B} = \mathbf{B}^a + \mathbf{B}^s$$

Applied:

$$\mathbf{F}_i^a = q\mathbf{E}_i^a + q\mathbf{v}_i \times \mathbf{B}_i^a$$

Self-Field:

$$\mathbf{F}_i^s = q\mathbf{E}_i^s + q\mathbf{v}_i \times \mathbf{B}_i^s$$

$$\mathbf{E}^a(\mathbf{x}_i, t) \equiv \mathbf{E}_i^a \text{ etc.}$$

The self-field force can be simplified:

- ◆ See also: J.J. Barnard, **Intro. Lectures**

Plug in self-field forms:

$$\mathbf{F}_i^s = q\mathbf{E}_i^s + q\mathbf{v}_i \times \mathbf{B}_i^s \quad \dots \Big|_i \equiv \dots \Big|_{\mathbf{x}=\mathbf{x}_i}$$

$$\simeq q \left[ -\frac{\partial\phi}{\partial\mathbf{x}} \Big|_i + (\beta_b c \hat{\mathbf{z}} + \delta\mathbf{v}_i) \times \left( \frac{\partial}{\partial\mathbf{x}} \times \hat{\mathbf{z}} \frac{\beta_b}{c} \phi \right) \Big|_i \right]$$

0 Neglect: Paraxial

Resolve into transverse (x and y) and longitudinal (z) components. After some algebra, find:

$$\mathbf{F}_i^s = \underbrace{-\frac{q}{\gamma_b^2} \frac{\partial\phi}{\partial\mathbf{x}_\perp} \Big|_i}_{\text{Transverse}} \quad \underbrace{-\hat{\mathbf{z}} q \frac{\partial\phi}{\partial z} \Big|_i}_{\text{Longitudinal}}$$

$$\gamma_b \equiv \frac{1}{\sqrt{1 - \beta_b^2}}$$

Axial relativistic gamma of beam

### /// Aside: Singular Self Fields

In *free space*, the beam potential generated from the singular charge density:

$$\rho^s = \sum_{i=1}^N q_i \delta[\mathbf{x} - \mathbf{x}_i(t)]$$

is

$$\phi(\mathbf{x}) = \frac{q}{4\pi\epsilon_0} \sum_{i=1}^N \frac{1}{|\mathbf{x} - \mathbf{x}_i|}$$

Thus, the force of a particle at  $\mathbf{x} = \mathbf{x}_i$  is:

$$\mathbf{F}_i = -q \left. \frac{\partial \phi}{\partial \mathbf{x}} \right|_i = \frac{q^2}{4\pi\epsilon_0} \sum_{j=1}^N \frac{(\mathbf{x}_i - \mathbf{x}_j)}{|\mathbf{x}_i - \mathbf{x}_j|^{3/2}}$$

Which diverges due to the  $i = j$  term. This divergence is essentially “erased” when the continuous charge density is applied:

$$\rho^s = \sum_{i=1}^N q_i \delta[\mathbf{x} - \mathbf{x}_i(t)] \longrightarrow \rho(\mathbf{x}, t)$$

- ◆ Effectively removes effect of collisions
- ◆ See: J.J. Barnard, **Intro Lectures** for more details
  - Find collisionless Vlasov model of evolution is often adequate

///

The particle equations of motion in  $\mathbf{x}_i - \mathbf{v}_i$  phase-space variables become:

- ◆ Separate parts of  $q\mathbf{E}_i^a + q\mathbf{v}_i \times \mathbf{B}_i^a$  into transverse and longitudinal comp

### Transverse

$$\frac{d}{dt}\mathbf{x}_{\perp i} = \mathbf{v}_{\perp i}$$

$$\frac{d}{dt}(m\gamma_i\mathbf{v}_{\perp i}) \simeq \underbrace{q\mathbf{E}_{\perp i}^a + q\beta_b c\hat{\mathbf{z}} \times \mathbf{B}_{\perp i}^a + qB_{zi}^a\mathbf{v}_{\perp i} \times \hat{\mathbf{z}}}_{\text{Applied}} - q \frac{1}{\gamma_b^2} \frac{\partial\phi}{\partial\mathbf{x}_{\perp}} \Big|_i$$

Self

### Longitudinal

$$\frac{d}{dt}z_i = v_{zi}$$

$$\frac{d}{dt}(m\gamma_i v_{zi}) \simeq \underbrace{qE_{zi}^a - q(v_{xi}B_{yi}^a - v_{yi}B_{xi}^a)}_{\text{Applied}} - q \frac{\partial\phi}{\partial z} \Big|_i$$


Self

In the remainder of this (and most other) lectures, we analyze **Transverse Dynamics**. **Longitudinal Dynamics** will be covered in J.J. Barnard lectures

- ◆ Except near injector, acceleration is typically slow
  - Fractional change in  $\gamma_b, \beta_b$  small over characteristic transverse dynamical scales such as lattice period and betatron oscillation periods
- ◆ Regard  $\gamma_b, \beta_b$  as specified functions given by the “acceleration schedule”

# S1E: Equations of Motion in $s$ and the Paraxial Approximation

In transverse accelerator dynamics, it is convenient to employ the axial coordinate ( $s$ ) of the particle in the accelerator as the **independent** variable:

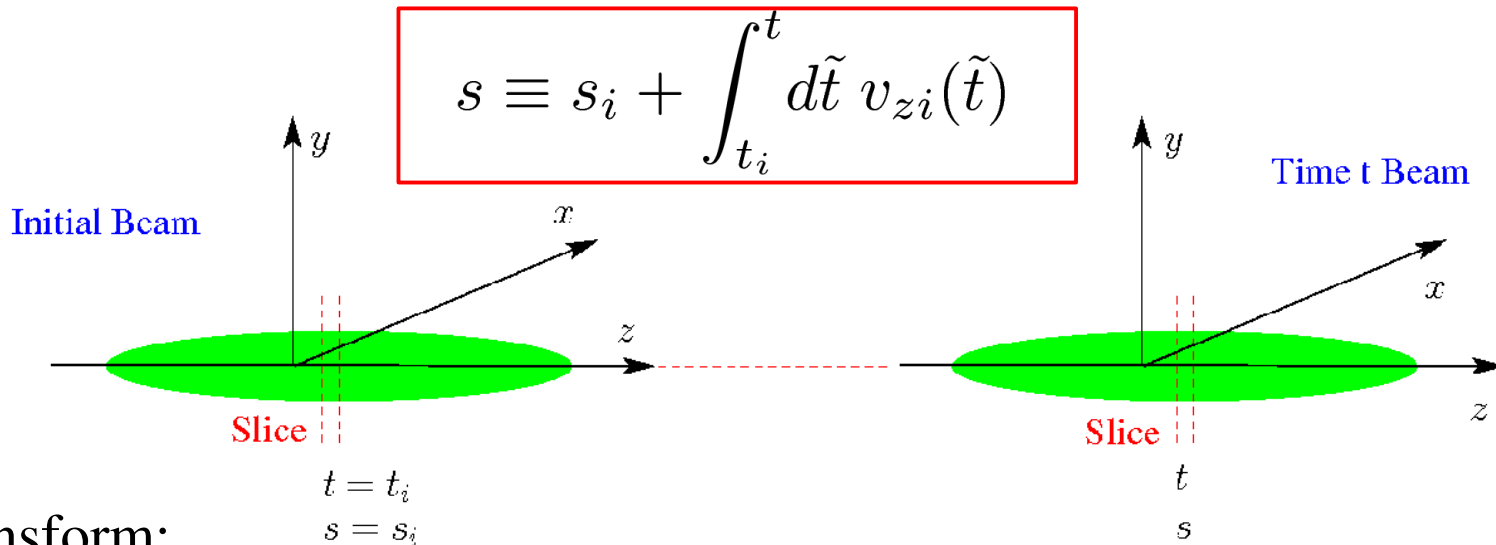

Transform:

$$v_{zi} = \frac{ds}{dt} \implies v_{xi} = \frac{dx_i}{dt} = \frac{ds}{dt} \frac{dx_i}{ds} = v_{zi} \frac{dx_i}{ds} = (\beta_b c + \delta v_{zi}) \frac{dx_i}{ds}$$

Denote:

$$' \equiv \frac{d}{ds}$$

$$v_{xi} = \frac{dx_i}{dt} \simeq \beta_b c x'_i$$

$$v_{yi} = \frac{dy_i}{dt} \simeq \beta_b c y'_i$$

Neglect

$\simeq \beta_b c \frac{dx_i}{ds}$   
 Neglecting term consistent with assumption of small longitudinal momentum spread (paraxial approximation)

◆ Procedure becomes more complicated when bends present: see **S1H**

In the **paraxial approximation**,  $x'$  and  $y'$  can be interpreted as the (small magnitude) angles that the particles make the with the z-axis:

$$x - \text{ angle} = \frac{v_{xi}}{v_{zi}} \simeq \frac{v_{xi}}{\beta_b c} = x'_i$$


$$y - \text{ angle} = \frac{v_{yi}}{v_{zi}} \simeq \frac{v_{yi}}{\beta_b c} = y'_i$$

Typical machine values:  
 $|x'| < 50 \text{ mrad}$

The angles will be *small* in the paraxial approximation:

$$v_{xi}^2, v_{yi}^2 \ll \beta_b^2 c^2 \implies x_i'^2, y_i'^2 \ll 1$$

Since the spread of axial momentum/velocities is small in the paraxial approximation, a thin axial slice of the beam maps to a thin axial slice and  $s$  can also be thought of as the axial coordinate of the slice in the accelerator lattice

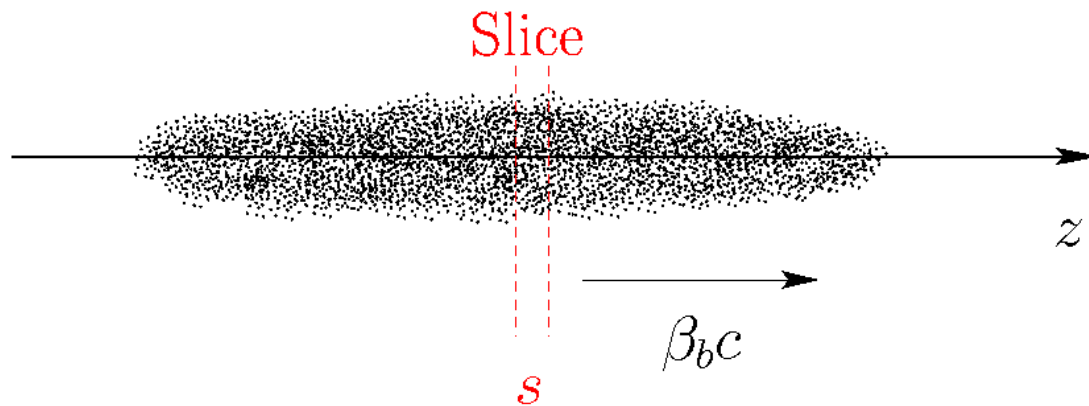

$$\beta_b \equiv \sum_{i=1}^{N'} \frac{v_{zi}}{c}$$

slice

$$s \simeq s_i + \int_{t_i}^t d\tilde{t} \beta_b(\tilde{t})$$

Transverse particle equations of motion need to be expressed in  $s$ , not  $t$

$$\underbrace{\frac{d}{dt}(m\gamma_i \mathbf{v}_{\perp i})}_{\text{Term 1}} \simeq q\mathbf{E}_{\perp i}^a + q\beta_b c \hat{\mathbf{z}} \times \mathbf{B}_{\perp i}^a + \underbrace{qB_{zi}^a \mathbf{v}_{\perp i} \times \hat{\mathbf{z}}}_{\text{Term 2}} - q \frac{1}{\gamma_b^2} \frac{\partial \phi}{\mathbf{x}_{\perp}} \Big|_i$$

Transform **Terms 1** and **2** in the particle equation of motion:

$$\frac{d}{dt} = v_{zi} \frac{d}{ds}$$

$$\begin{aligned} \text{Term 1: } \frac{d}{dt} \left( m\gamma_i \frac{d\mathbf{x}_{\perp i}}{dt} \right) &= m v_{zi} \frac{d}{ds} \left( \gamma_i v_{zi} \frac{d\mathbf{x}_{\perp i}}{ds} \right) \\ &= m\gamma_i v_{zi}^2 \frac{d^2 \mathbf{x}_{\perp i}}{ds^2} + m \left( \frac{d\mathbf{x}_{\perp i}}{ds} \right) \frac{d}{ds} (\gamma_i v_{zi}) \end{aligned}$$

**Term 1A** **Term 1B**

Approximate:

$$\text{Term 1A: } m\gamma_i v_{zi}^2 \frac{d^2 \mathbf{x}_{\perp i}}{ds^2} \simeq m\gamma_b \beta_b^2 c^2 \frac{d^2 \mathbf{x}_{\perp i}}{ds^2} = m\gamma_b \beta_b^2 c^2 \mathbf{x}_{\perp i}''$$

$$\begin{aligned} \text{Term 1B: } m \left( \frac{d\mathbf{x}_{\perp i}}{ds} \right) v_{zi} \frac{d}{ds} (\gamma_i v_{zi}) &\simeq m \left( \frac{d\mathbf{x}_{\perp i}}{ds} \right) \beta_b c \frac{d}{ds} (\gamma_b \beta_b c) \\ &\simeq m\beta_b c^2 (\gamma_b \beta_b)' \mathbf{x}_{\perp i}' \end{aligned}$$



Using the approximations 1A and 1B gives for **Term 1**:

$$m \frac{d}{dt} \left( \gamma_i \frac{d\mathbf{x}_{\perp i}}{dt} \right) \simeq m \gamma_b \beta_b^2 c^2 \left[ \mathbf{x}_{\perp i}'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \mathbf{x}_{\perp i}' \right]$$

Similarly we approximate in **Term 2**:

$$q B_{zi}^a \mathbf{v}_{\perp i} \times \hat{\mathbf{z}} \simeq q B_{zi}^a \beta_b c \mathbf{x}_{\perp i}' \times \hat{\mathbf{z}}$$

Using the reduced expressions for **Terms 1** and **2** obtains the reduced transverse equation of motion:

$$\begin{aligned} \mathbf{x}_{\perp i}'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \mathbf{x}_{\perp i}' &= \frac{q}{m \gamma_b \beta_b^2 c^2} \mathbf{E}_{\perp i}^a + \frac{q}{m \gamma_b \beta_b c} \hat{\mathbf{z}} \times \mathbf{B}_{\perp i}^a \\ &+ \frac{q B_{zi}^a}{m \gamma_b \beta_b c} \mathbf{x}_{\perp i}' \times \hat{\mathbf{z}} - \frac{q}{\gamma_b^3 \beta_b^2 c^2} \left. \frac{\partial \phi}{\partial \mathbf{x}_{\perp}} \right|_i \end{aligned}$$

- ◆ Will be analyzed extensively in lectures that follow in various limits to better understand structure of solutions

## S1F: Summary: Transverse Particle Equations of Motion

$$\mathbf{x}_{\perp}'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \mathbf{x}_{\perp}' = \frac{q}{m \gamma_b \beta_b^2 c^2} \mathbf{E}_{\perp}^a + \frac{q}{m \gamma_b \beta_b c} \hat{\mathbf{z}} \times \mathbf{B}_{\perp}^a + \frac{q B_z^a}{m \gamma_b \beta_b c} \mathbf{x}_{\perp}' \times \hat{\mathbf{z}} - \frac{q}{\gamma_b^3 \beta_b^2 c^2} \frac{\partial}{\partial \mathbf{x}_{\perp}} \phi$$

$\mathbf{E}^a$  = Applied Electric Field

$\mathbf{B}^a$  = Applied Magnetic Field

$$' \equiv \frac{d}{ds} \quad \gamma_b \equiv \frac{1}{\sqrt{1 - \beta_b^2}}$$

$$\nabla^2 \phi = \frac{\partial}{\partial \mathbf{x}} \cdot \frac{\partial}{\partial \mathbf{x}} \phi = -\frac{\rho}{\epsilon_0}$$

+ Boundary Conditions on  $\phi$

- ◆ Drop particle  $i$  subscripts (in most cases) henceforth to simplify notation
- ◆ Neglects axial energy spread, bending, and electromagnetic radiation
- ◆  $\gamma_b$  factors different in applied and self-field terms:

In  $-\frac{q}{m \gamma_b^3 \beta_b^2 c^2} \frac{\partial}{\partial \mathbf{x}} \phi$ , contributions to  $\gamma_b^3$ :

$\gamma_b \implies$  Kinematics



$\gamma_b^2 \implies$  Self-Magnetic Field Corrections (leading order)

# S1G: Overview: Analysis to Come


Much of accelerator physics centers on understanding the evolution of beam particles in **4-dimensional**  $x-x'$  and  $y-y'$  phase space.

Typically, restricted **2-dimensional** phase-space projections in  $x-x'$  and/or  $y-y'$  are analyzed to simplify interpretations:

- ◆ When **forces** are **linear** particles tend to move on ellipses of constant area
  - Ellipse may elongate/shrink and rotate as beam evolves in lattice
- ◆ **Nonlinear force** components distort orbits and cause undesirable effects
  - Growth of effective phase-space area

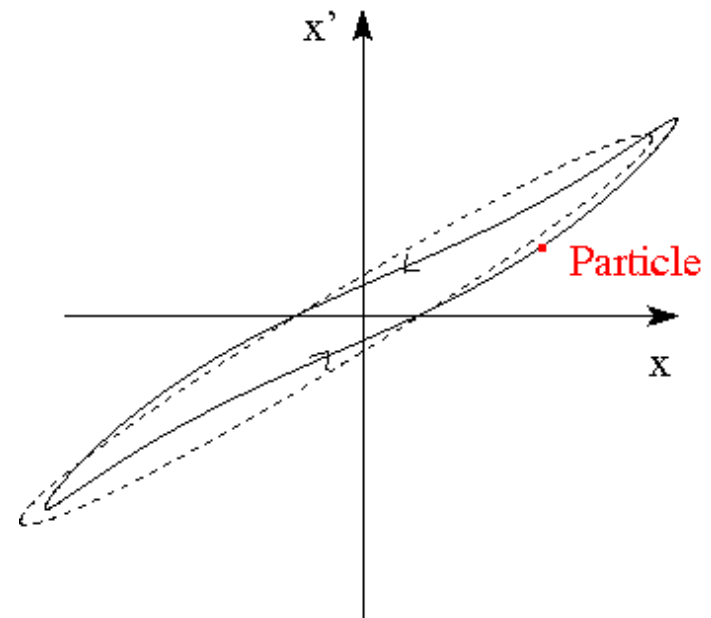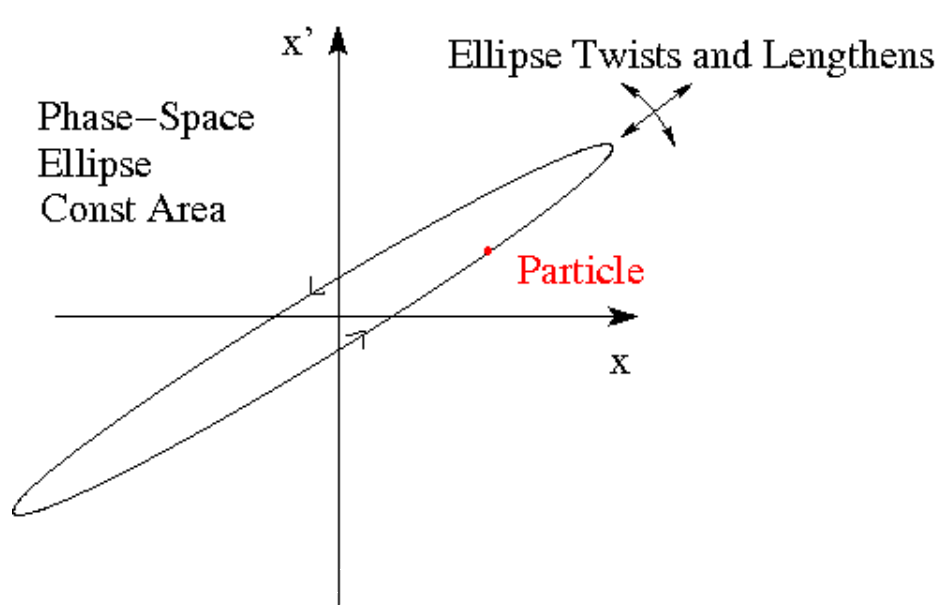

The “effective” phase-space volume of a distribution of beam particles is of fundamental interest

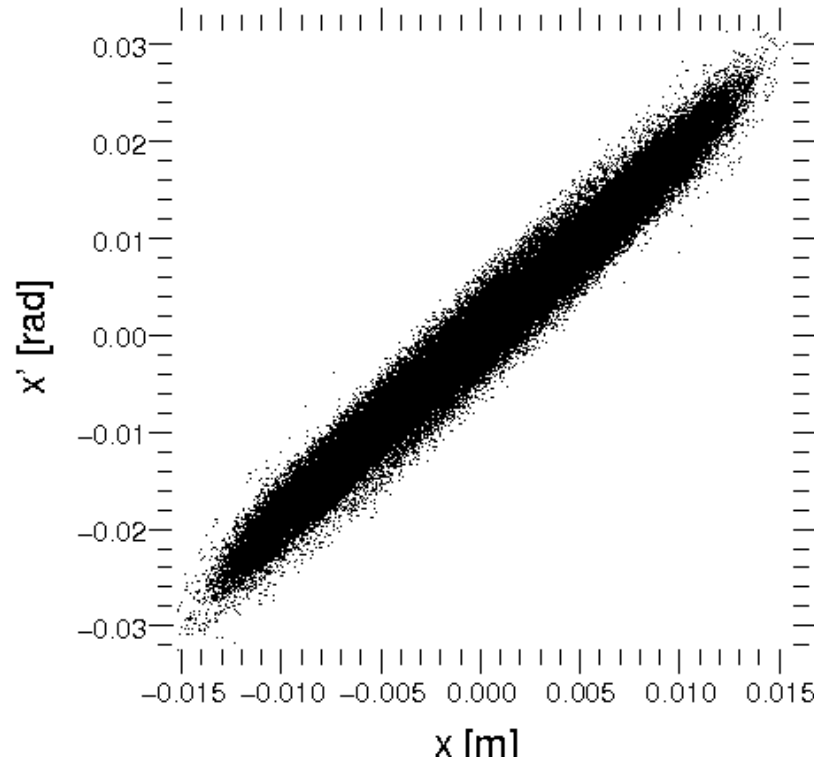


Effective area measure in  $x$ - $x'$  phase-space is the  $x$ -emittance  $\varepsilon_x$

Statistical "Area"  $\sim \pi\varepsilon_x$

$$\varepsilon_x = 4[\langle x^2 \rangle_{\perp} \langle x'^2 \rangle_{\perp} - \langle xx' \rangle_{\perp}^2]^{1/2}$$

We will find in statistical beam descriptions that:

**Larger/Smaller** beam phase-space areas  
(**Larger/Smaller** emittances)




**Harder/Easier**  
to focus beam  
on small final spots

Much of advanced accelerator physics centers on understanding and controlling **emittance growth** due to **nonlinear forces** arising from both space-charge and the applied focusing. In the remainder of the next few lectures we will review the physics of transverse particle dynamics of particles moving in linear applied fields. Later we will generalize concepts to include forces from space-charge and nonlinear effects.

# S1H: Bent Coordinate System and Particle Equations of Motion with Dipole Bends and Axial Momentum Spread

The previous equations of motion can be applied to dipole bends provided the  $x, y, z$  coordinate system is fixed. In practice, it can prove more convenient to employ coordinates that follow the beam in a bend.

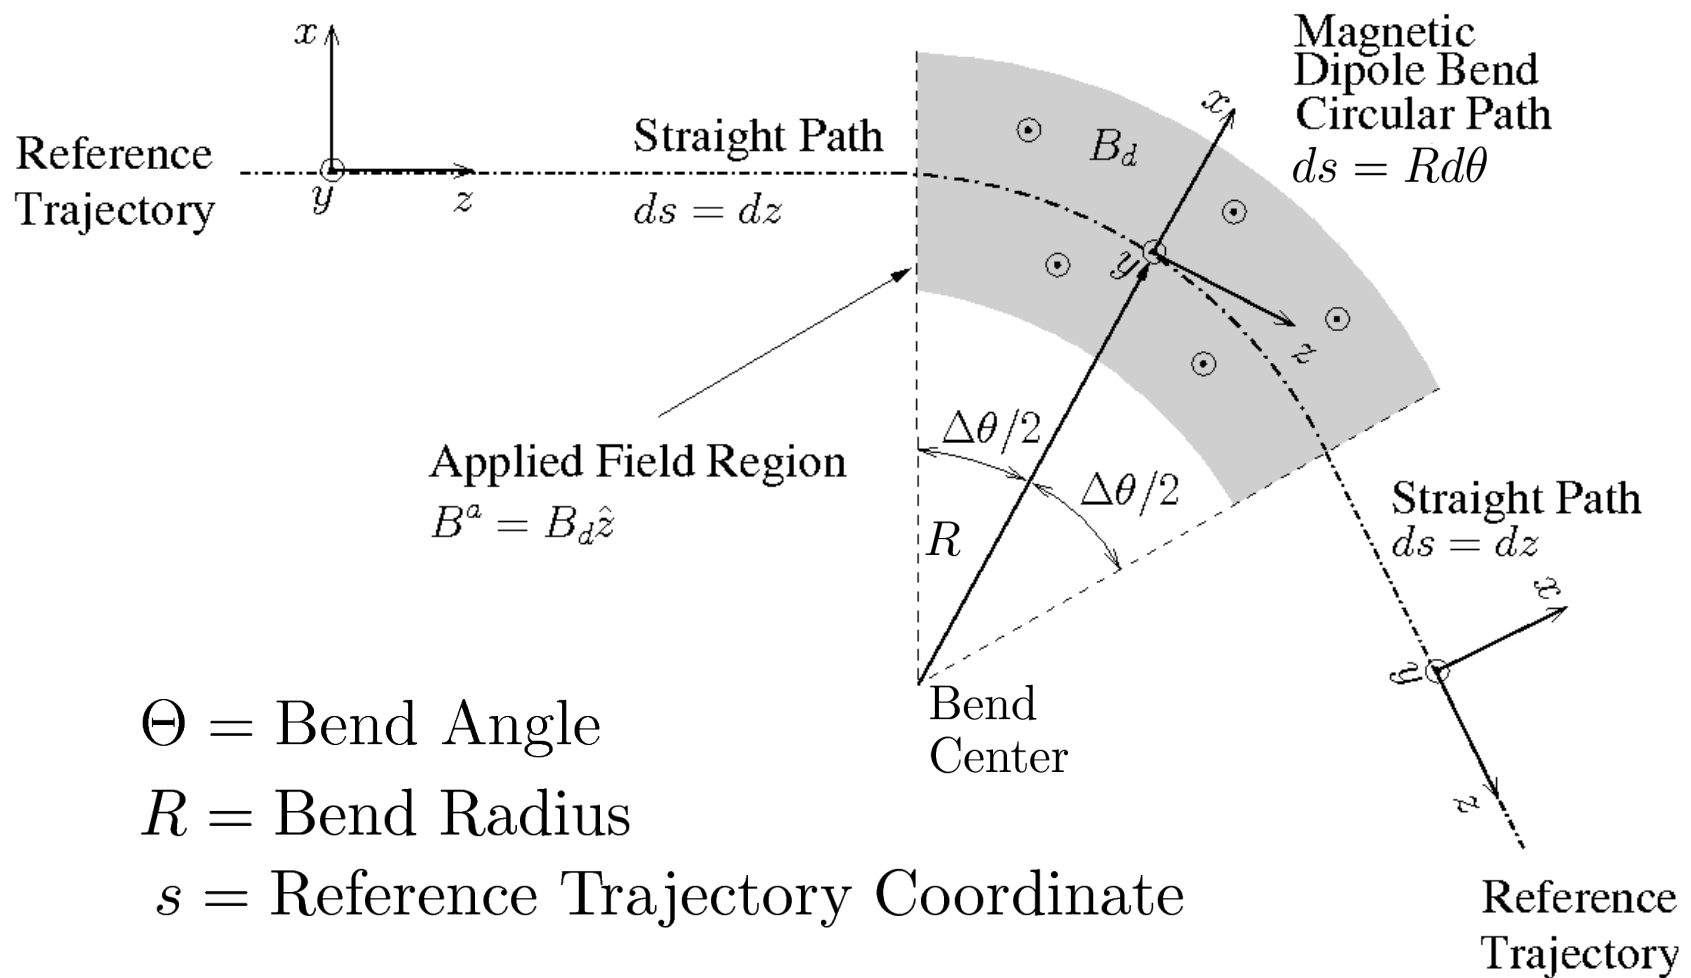

In this perspective, dipoles are adjusted given the design momentum of the reference particle to bend the orbit through a radius  $R$ .

- ◆ Bends usually only in one plane (say  $x$ )
  - Implemented by a dipole applied field:  $E_x^a$  or  $B_y^a$
- ◆ Easy to apply material analogously for  $y$ -plane bends, if necessary

Denote:

$$p_0 = m\gamma_b\beta_b c = \text{design momentum}$$

Then a magnetic  $x$ -bend through a radius  $R$  is specified by:

$$\mathbf{B}^a = B_y^a \hat{\mathbf{y}} = \text{const in bend}$$
$$\frac{1}{R} = \frac{qB_y^a}{p_0}$$

Analogous formula for  
**Electric Bend** will be derived  
in problem set

The **particle rigidity** is defined as ( $[B\rho]$  read as one symbol called “B-Rho”):

$$[B\rho] \equiv \frac{p_0}{q} = \frac{m\gamma_b\beta_b c}{q}$$

is often applied to express the bend result as:

$$\frac{1}{R} = \frac{B_y^a}{[B\rho]}$$

## Comments on bends:


- ◆  $R$  can be **positive** or **negative** depending on sign of  $B_y^a / [B\rho]$
- ◆ For **straight** sections,  $R \rightarrow \infty$  ( or equivalently,  $B_y^a = 0$ )
- ◆ Lattices often made from discrete element dipoles and straight sections with separated function optics
  - Bends sometimes provide “edge focus” in a ring
  - Sometimes elements for bending/focusing are combined
- ◆ For a ring, dipoles strengths are tuned with particle rigidity/momentum so the reference orbit makes a closed path lap through the circular machine
  - Dipoles adjusted as particles gain energy to maintain closed path
  - In a Synchrotron dipoles and focusing elements are adjusted together to maintain focusing and bending properties with energy gain.  
This is the origin of the name “Synchrotron.”
- ◆ Total bending strength of a ring in Tesla-meters limits the ultimately achievable particle energy/momentum in the ring



/// Example: Typical separated function lattice in a Synchrotron

Focus Elements in Red

Bending Elements in Green

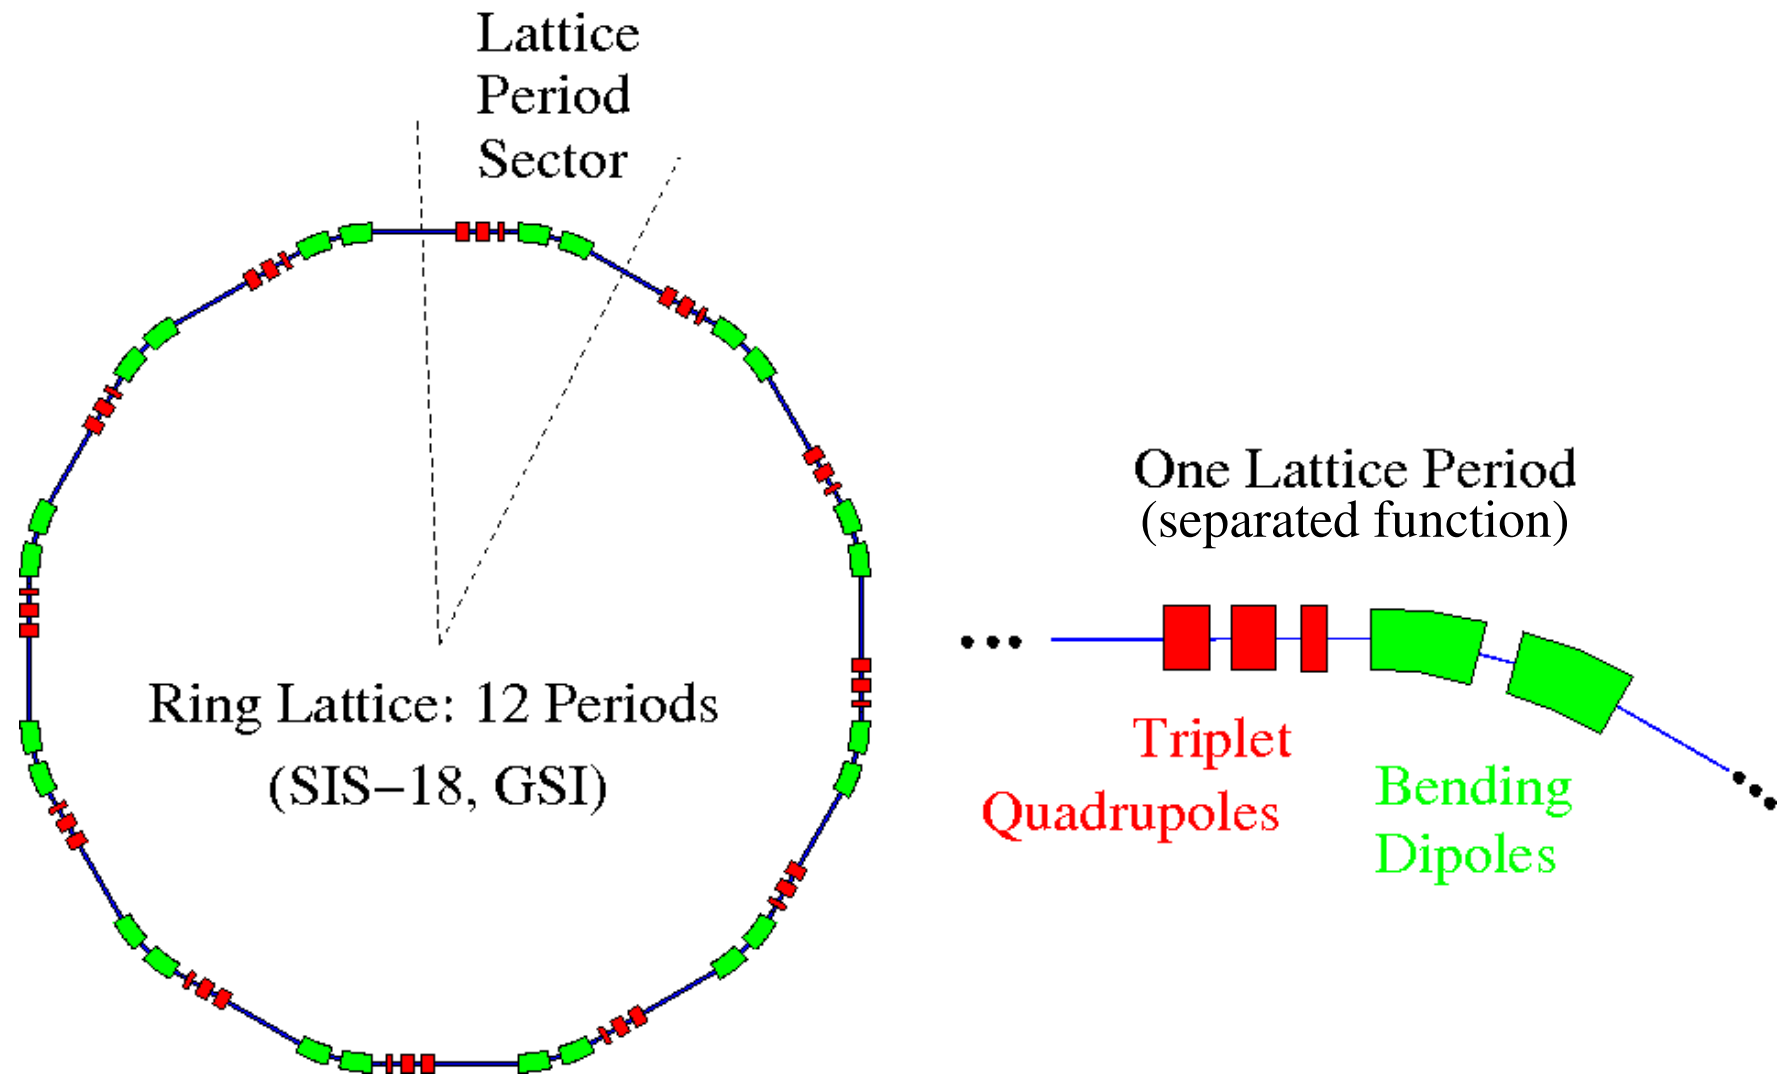


For “off-momentum” errors:

$$p_s = p_0 + \delta p$$

$$p_0 = m\gamma_b\beta_b c = \text{design momentum}$$

$$\delta p = \text{off- momentum}$$

This will modify the particle equations of motion, particularly in cases where there are bends since particles with different momenta will be bent at different radii

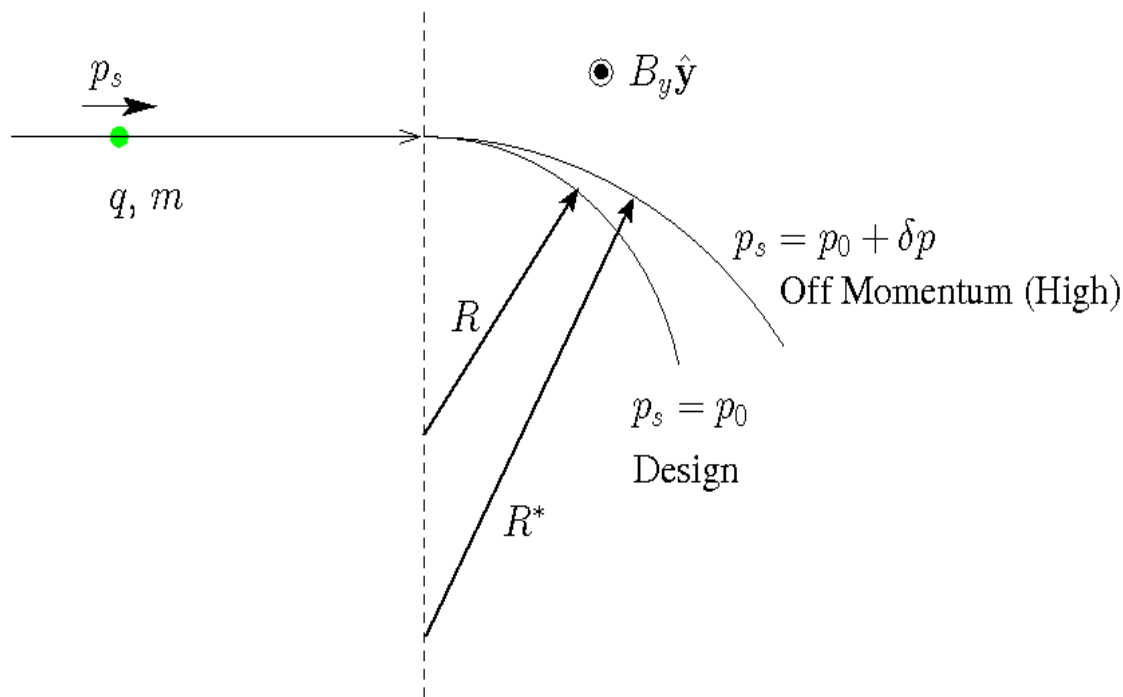

- ◆ Not usual to have acceleration in bends
  - Dipole bends and quadrupole focusing are sometimes combined

## Transverse particle equations of motion including “off-momentum” effects:

- ◆ See texts such as Edwards and Syphers for guidance on derivation steps
- ◆ Full derivation is beyond needs/scope of this class

$$x'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} x' + \left[ \frac{1}{R^2(s)} \frac{1 - \delta}{1 + \delta} \right] x = \frac{\delta}{1 + \delta} \frac{1}{R(s)} + \frac{q}{m \gamma_b \beta_b^2 c^2} \frac{E_x^a}{(1 + \delta)^2}$$

$$- \frac{q}{m \gamma_b \beta_b c} \frac{B_y^a}{1 + \delta} + \frac{q}{m \gamma_b \beta_b c} \frac{B_s^a}{1 + \delta} y' - \frac{q}{m \gamma_b^3 \beta_b^2 c^2} \frac{1}{1 + \delta} \frac{\partial \phi}{\partial x}$$

$$y'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} y' = \frac{q}{m \gamma_b \beta_b^2 c^2} \frac{E_y^a}{(1 + \delta)^2} + \frac{q}{m \gamma_b \beta_b c} \frac{B_x^a}{1 + \delta}$$

$$- \frac{q}{m \gamma_b \beta_b c} \frac{B_s^a}{1 + \delta} x' - \frac{q}{m \gamma_b^3 \beta_b^2 c^2} \frac{1}{1 + \delta} \frac{\partial \phi}{\partial y}$$

$$p_0 = m \gamma_b \beta_b c = \text{Design Momentum}$$

$$\delta \equiv \frac{\delta p}{p_0} = \text{Fractional Momentum Error} \quad \frac{1}{R(s)} = \frac{B_y^a(s)|_{\text{Dipole}}}{[B\rho]} \quad [B\rho] = \frac{p_0}{q}$$

### Comments:

- ◆ Design bends only in  $x$  and  $B_y^a$ ,  $E_x^a$  contain no dipole terms (design orbit)
  - Dipole components set via the design bend radius  $R(s)$
- ◆ Equations contain only low-order terms in momentum spread  $\delta$

## Comments continued:

- ◆ Equations are often applied linearized in  $\delta$
- ◆ Achromatic focusing lattices are often designed using equations with momentum spread to obtain focal points independent of  $\delta$  to some order
- ◆  $x$  and  $y$  equations differ significantly due to bends modifying the  $x$ -equation when  $R(s)$  is finite
- ◆ It will be shown in the problems that for electric bends:

$$\frac{1}{R(s)} = \frac{E_x^a(s)}{\beta_b c [B\rho]}$$

- ◆ Applied fields for focusing:  $\mathbf{E}_\perp^a$ ,  $\mathbf{B}_\perp^a$ ,  $B_s^a$   
must be expressed in the bent  $x,y,s$  system of the reference orbit
  - Includes error fields in dipoles
- ◆ Self fields may also need to be solved taking into account bend terms
  - Often can be neglected in Poisson's Equation

$$\left\{ \frac{1}{1 + x/R} \frac{\partial}{\partial x} \left[ \left(1 + \frac{x}{R}\right) \frac{\partial}{\partial x} \right] + \frac{\partial^2}{\partial y^2} + \frac{1}{1 + x/R} \frac{\partial}{\partial s} \left[ \frac{1}{1 + x/R} \frac{\partial}{\partial s} \right] \right\} \phi = -\frac{\rho}{\epsilon_0}$$

if  $R \rightarrow \infty$

reduces to familiar: 
$$\left\{ \frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} + \frac{\partial^2}{\partial s^2} \right\} \phi = -\frac{\rho}{\epsilon_0}$$

## S2: Transverse Particle Equations of Motion in Linear Focusing Channels

### S2A: Introduction

$$\begin{aligned}x'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} x' &= \frac{q}{m \gamma_b \beta_b^2 c^2} E_x^a - \frac{q}{m \gamma_b \beta_b c} B_y^a + \frac{q}{m \gamma_b \beta_b c} B_z^a y' \\ &\quad - \frac{q}{m \gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial x} \\ y'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} y' &= \frac{q}{m \gamma_b \beta_b^2 c^2} E_y^a + \frac{q}{m \gamma_b \beta_b c} B_x^a - \frac{q}{m \gamma_b \beta_b c} B_z^a x' \\ &\quad - \frac{q}{m \gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial y}\end{aligned}$$

Equations previously derived under assumptions:

- ◆ No bends (fixed  $x$ - $y$ - $z$  coordinate system with no local bends)
- ◆ Paraxial equations ( $x'^2, y'^2 \ll 1$ )
- ◆ No dispersive effects ( $\beta_b$  same all particles), acceleration allowed ( $\beta_b \neq \text{const}$ )
- ◆ Electrostatic and leading-order (in  $\beta_b$ ) self-magnetic interactions

## The applied focusing fields

$$\text{Electric: } E_x^a, E_y^a, E_z^a$$

$$\text{Magnetic: } B_x^a, B_y^a, B_z^a$$

must be specified as a function of  $s$  and the transverse particle coordinates  $x$  and  $y$  to complete the description

- ◆ Consistent change in axial velocity ( $\beta_b c$ ) due to  $E_z^a$  must be evaluated
  - Typically due to RF cavities and/or induction cells
- ◆ Restrict analysis to fields from applied focusing structures

Intense beam accelerators and transport lattices are designed to optimize *linear* applied focusing forces with terms:

$$\text{Electric: } E_x^a \simeq (\text{function of } s) \times (x \text{ or } y)$$

$$E_y^a \simeq (\text{function of } s) \times (x \text{ or } y)$$

$$\text{Magnetic: } B_x^a \simeq (\text{function of } s) \times (x \text{ or } y)$$

$$B_y^a \simeq (\text{function of } s) \times (x \text{ or } y)$$

$$B_z^a \simeq (\text{function of } s)$$

Common situations that realize these linear applied focusing forms will be overviewed:

- ◆ Continuous Focusing (see: [S2B](#))
- ◆ Quadrupole Focusing
  - Electric (see: [S2C](#))
  - Magnetic (see: [S2D](#))
- ◆ Solenoidal Focusing (see: [S2E](#))

Other situations that will not be covered (typically more nonlinear optics):

- ◆ Einzel Lens (see: J.J. Barnard, [Intro Lectures](#))
- ◆ Plasma Lens
- ◆ Wire guiding

## S2B: Continuous Focusing

Assume constant electric field applied focusing force:

$$\begin{aligned} \mathbf{B}^a &= 0 \\ \mathbf{E}_{\perp}^a &= E_x^a \hat{\mathbf{x}} + E_y^a \hat{\mathbf{y}} = -\frac{m\gamma_b\beta_b^2 c^2 k_{\beta 0}^2}{q} \mathbf{x}_{\perp} & k_{\beta 0}^2 &\equiv \text{const} > 0 \\ E_z^a &= 0 & [k_{\beta 0}^2] &= \frac{\text{rad}}{\text{m}^2} \end{aligned}$$

Continuous focusing equations of motion:

- ◆ Insert field components into linear applied field equations and collect terms

$$\mathbf{x}_{\perp}'' + \frac{(\gamma_b\beta_b)'}{(\gamma_b\beta_b)} \mathbf{x}_{\perp}' + k_{\beta 0}^2 \mathbf{x}_{\perp} = -\frac{q}{m\gamma_b^3\beta_b^2 c^2} \frac{\partial}{\partial \mathbf{x}_{\perp}} \phi$$

Even this simple model can become complicated

- ◆ **Space charge:**  $\phi$  must be calculated consistent with beam evolution
- ◆ **Acceleration:** acts to damp orbits (see: **S10**)



Simple model in limit of no acceleration (  $\gamma_b\beta_b \simeq \text{const}$  ) and negligible space-charge (  $\phi \simeq \text{const}$  ):

$$\mathbf{x}''_{\perp} + k_{\beta 0}^2 \mathbf{x}_{\perp} = 0 \quad \Longrightarrow \quad \text{orbits simple harmonic oscillatons}$$

General solution is elementary:

$$\begin{aligned} \mathbf{x}_{\perp} &= \mathbf{x}_{\perp}(s_i) \cos[k_{\beta 0}(s - s_i)] + [\mathbf{x}'_{\perp}(s_i)/k_{\beta 0}] \sin[k_{\beta 0}(s - s_i)] \\ \mathbf{x}'_{\perp} &= -k_{\beta 0} \mathbf{x}_{\perp}(s_i) \sin[k_{\beta 0}(s - s_i)] + \mathbf{x}'_{\perp}(s_i) \cos[k_{\beta 0}(s - s_i)] \end{aligned}$$

$$\mathbf{x}_{\perp}(s_i) = \text{Initial coordinate}$$



$$\mathbf{x}'_{\perp}(s_i) = \text{Initial angle}$$

### /// Example: Particle Orbits in Continuous Focusing

Particle phase-space in  $x$ - $x'$  with only applied field

$$k_{\beta 0} = 2\pi \text{ rad/m} \quad x(0) = 1 \text{ mm}$$

$$\phi \simeq 0 \quad \gamma_b \beta_b = \text{const} \quad x'(0) = 0$$

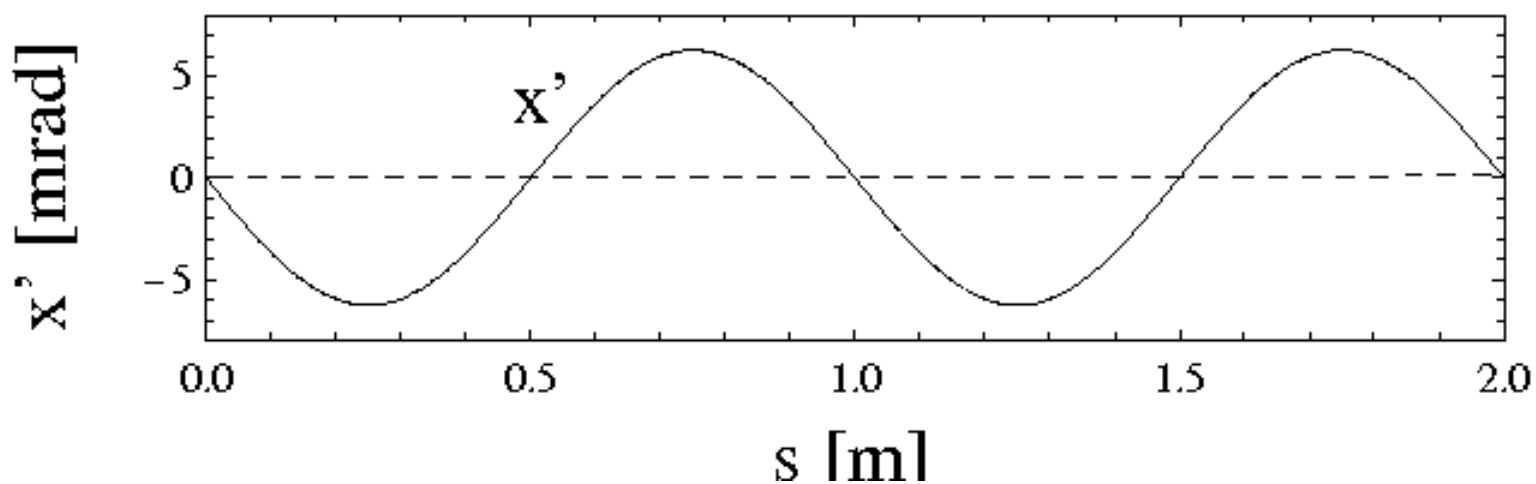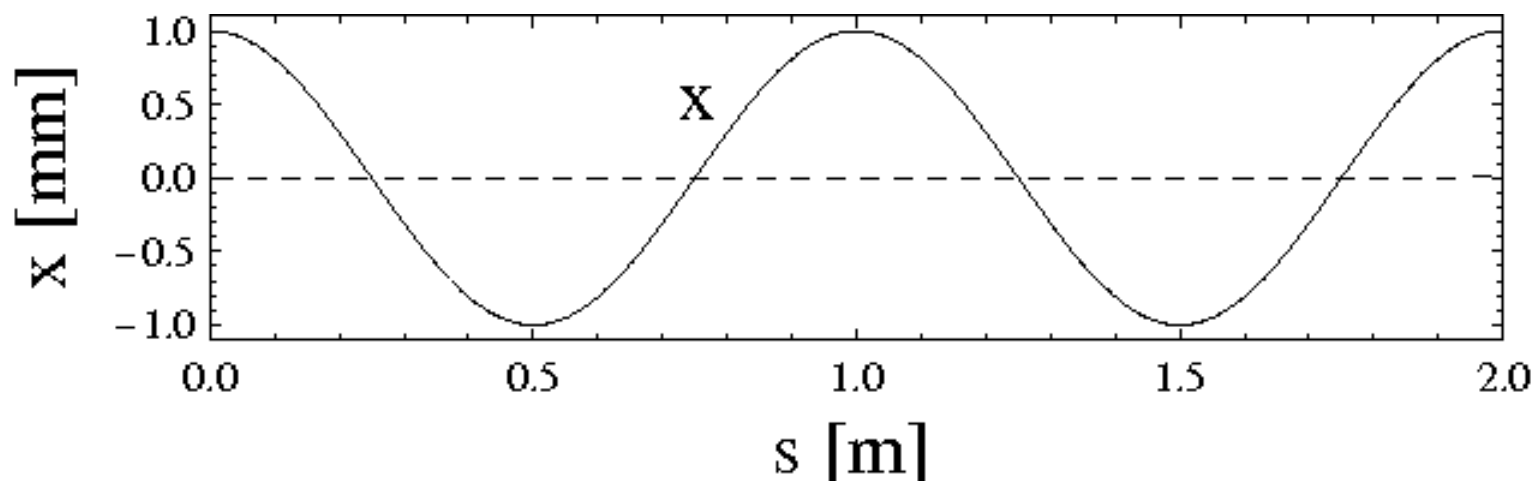

◆ Orbits in the applied field are just simple harmonic oscillators

///

## Problem with continuous focusing model:

The continuous focusing model is realized by a stationary ( $m \rightarrow \infty$ ) partially neutralizing uniform background of charges filling the beam pipe. To see this apply Maxwell's equations to the applied field to calculate an applied charge density:

$$\rho^a = \epsilon_0 \frac{\partial}{\partial \mathbf{x}} \cdot \mathbf{E}^a = -\frac{2m\epsilon_0\gamma_b\beta_b^2 c^2 k_{\beta 0}^2}{q} = \text{const}$$

- ◆ Unphysical model, but commonly employed since it represents the average action of more physical focusing fields in a simpler to analyze model
  - Demonstrate later in simple examples and problems given
- ◆ Continuous focusing can provide reasonably good estimates for more realistic periodic focusing models if  $k_{\beta 0}^2$  is appropriately identified in terms of “equivalent” parameters *and* the periodic system is stable.
  - See lectures that follow and homework problems for examples

In more realistic models, one requires that *quasi-static* focusing fields in the machine aperture satisfy the **vacuum Maxwell equations**

$$\begin{array}{ll} \nabla \cdot \mathbf{E}^a = 0 & \nabla \cdot \mathbf{B}^a = 0 \\ \nabla \times \mathbf{E}^a = 0 & \nabla \times \mathbf{B}^a = 0 \end{array}$$

- ◆ Require in the region of the beam
- ◆ Applied field sources outside of the beam region


The vacuum Maxwell equations constrain the 3D form of applied fields resulting from spatially localized lenses. The following cases are commonly exploited to optimize **linear** focusing strength in physically realizable systems while keeping the model relatively simple:

- 1) **Alternating Gradient Quadrupoles** with transverse orientation
  - Electric Quadrupoles (see: **S2C**)
  - Magnetic Quadrupoles (see: **S2D**)
- 2) **Solenoidal Magnetic Fields** with longitudinal orientation (see: **S2E**)
- 3) **Einzel Lenses** (see J.J. Barnard, **Introductory Lectures**)

# S2C: Alternating Gradient Quadrupole Focusing

## Electric Quadrupoles

In the axial center of a long **electric quadrupole**, model the fields as 2D transverse

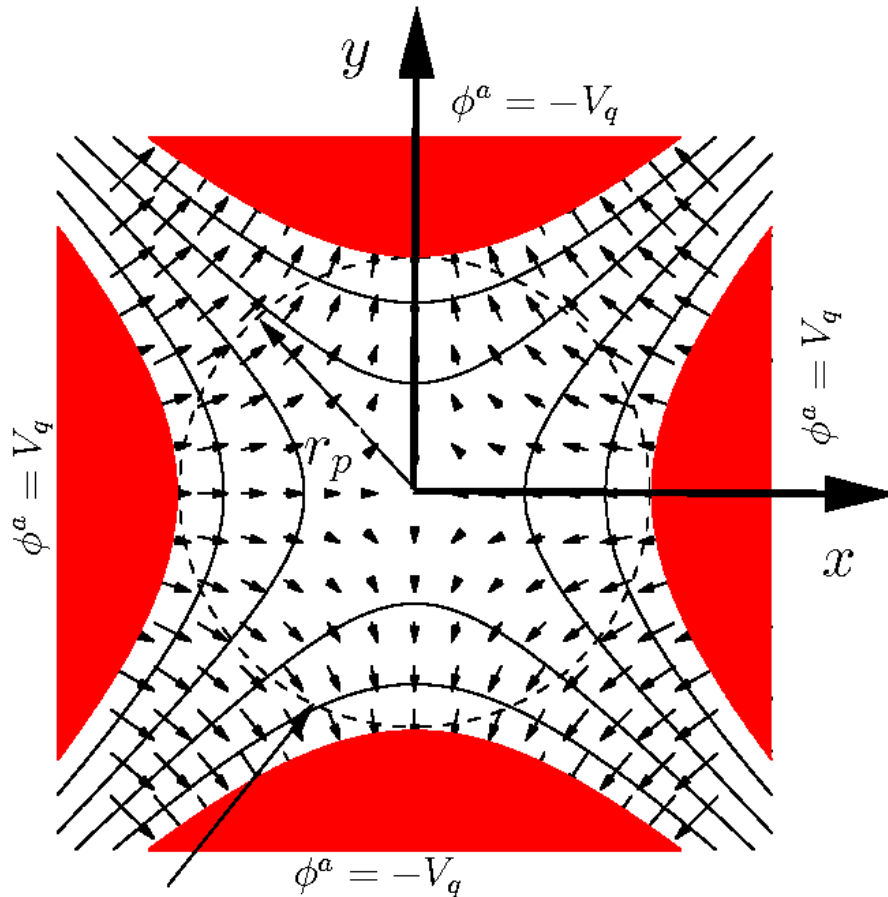

Electrodes Outside of Circle  $r = r_p$   
 Electrodes:  $x^2 - y^2 = \mp r_p^2$

- ◆ Electrodes hyperbolic
- ◆ Structure infinitely extruded along  $z$

### 2D Transverse Fields

$$\mathbf{B}^a = 0$$

$$E_x^a = -Gx$$

$$E_y^a = Gy$$

$$E_z^a = 0$$

$$G \equiv \frac{2V_q}{r_p^2} = -\frac{\partial E_x^a}{\partial x} = \frac{\partial E_y^a}{\partial y}$$


= Electric Gradient

$$V_q = \text{Pole Voltage}$$

$$r_p = \text{Pipe Radius (clear aperture)}$$

Quadrupoles actually have finite axial length in  $z$ . Model this by taking the gradient  $G$  to vary in  $s$ , i.e.,  $G = G(s)$  with  $s = z - z_{\text{center}}$  (straight section)

- ◆ Variation is called the **fringe-field** of the focusing element
- ◆ Variation will violate the Maxwell Equations in 3D
  - Provides a reasonable first approximation in many applications
- ◆ Usually quadrupole is long, and  $G(s)$  will have a flat central region and rapid variation near the ends

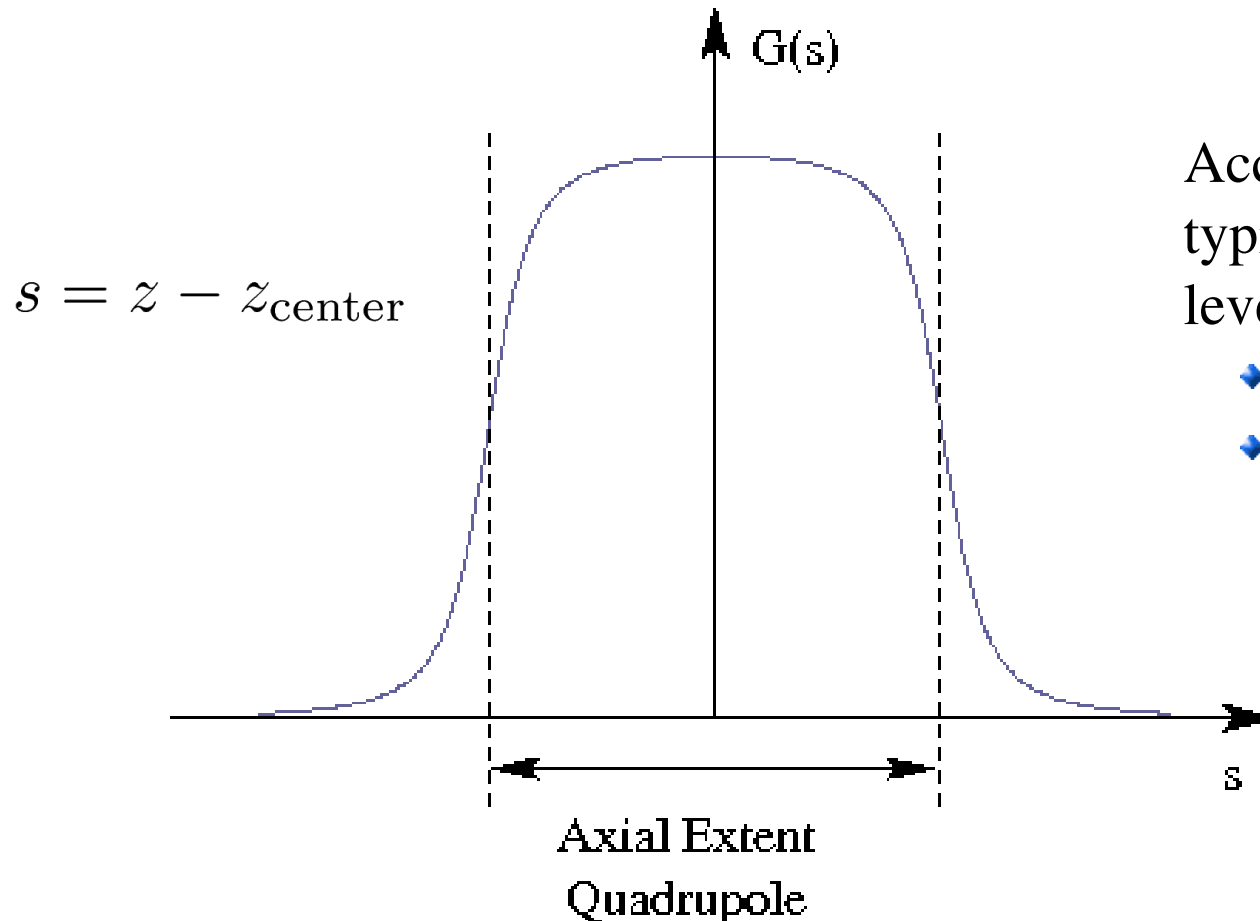


Accurate fringe calculation typically requires higher level modeling:

- ◆ 3D analysis
- ◆ Detailed geometry

For many applications the actual quadrupole fringe function  $G(s)$  is replaced by a simpler function to allow more idealized modeling

- ◆ Replacements should be made in an “equivalent” parameter sense to be detailed later (see: lectures on **Transverse Centroid and Envelope Modeling**)
- ◆ Fringe functions sometimes replaced by **piecewise constant**  $G(s)$ 
  - Often called “**hard-edge**” approximation
- ◆ See **S3** and Lund and Bukh, PRSTAB 7 924801 (2004), Appendix C for more details on equivalent models

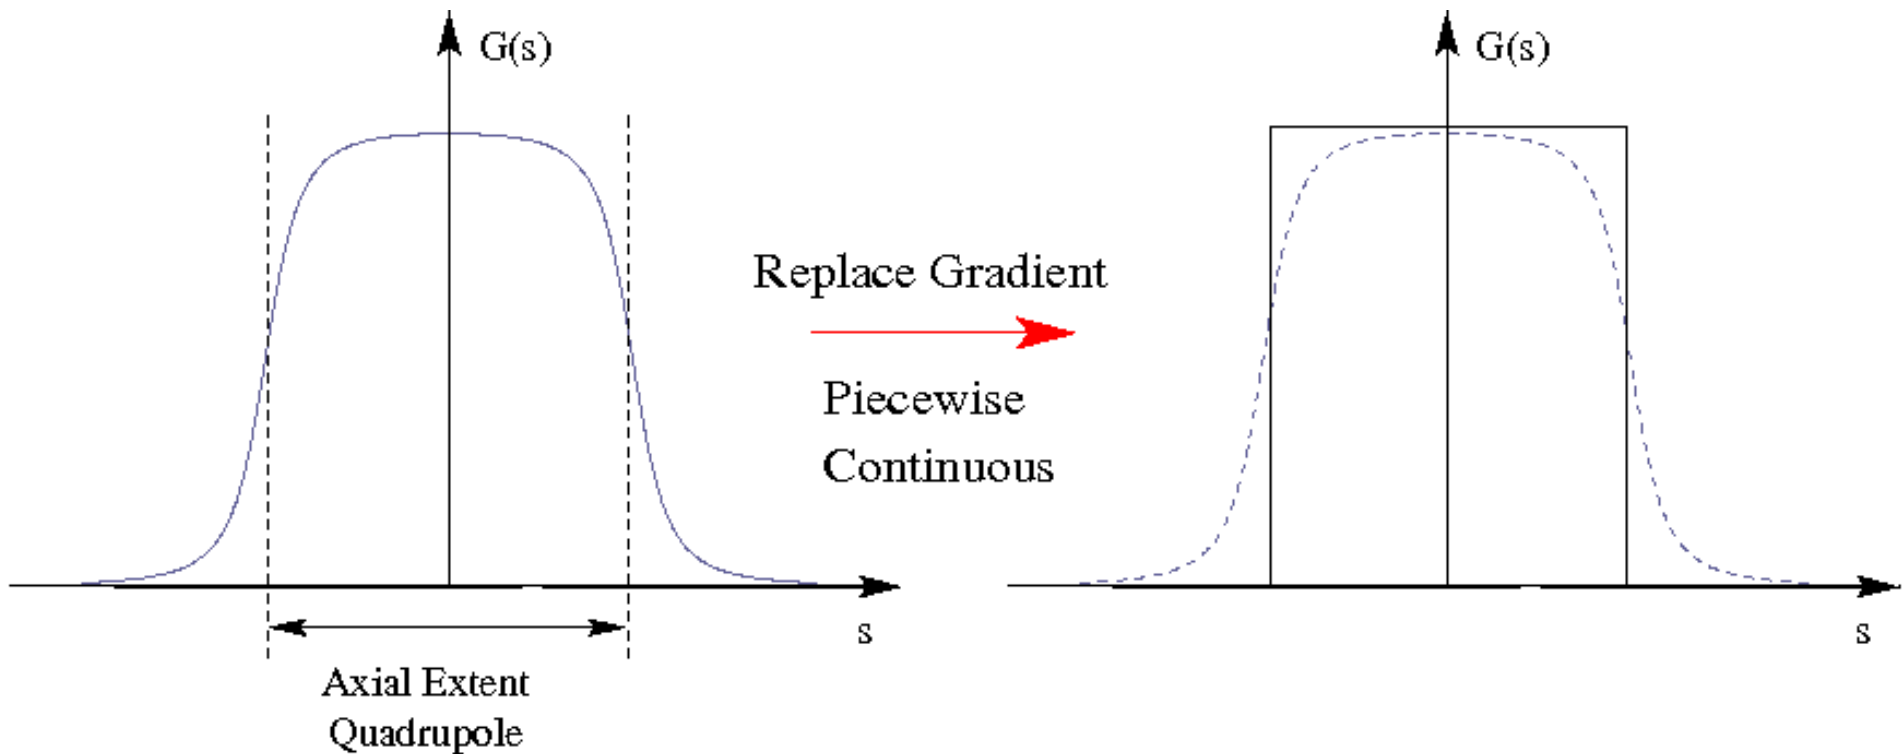

## Electric quadrupole equations of motion:

- ◆ Insert applied field components into linear applied field equations and collect terms

$$x'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} x' + \kappa(s)x = -\frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial x}$$

$$y'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} y' - \kappa(s)y = -\frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial y}$$

$$\kappa(s) = \frac{qG}{m\gamma_b \beta_b^2 c^2} = \frac{G}{\beta_b c [B\rho]}$$

$$G = -\frac{\partial E_x^a}{\partial y} = \frac{\partial E_y^a}{\partial x} = \frac{2V_q}{r_p^2} \quad [B\rho] = \frac{m\gamma_b \beta_b c}{q}$$

- ◆ For **positive/negative**  $\kappa$  the applied forces are **Focusing/deFocusing** in the  $x$ - and  $y$ -planes
- ◆ The  $x$ - and  $y$ -equations are decoupled
- ◆ Valid whether the the focusing function  $\kappa$  is piecewise constant or incorporates a fringe model




Quadrupoles must be arranged in a lattice where the particles traverse a sequence of optics with **alternating gradient** to focus strongly in all directions

- ◆ Alternating gradient necessary to provide focusing in both  $x$ - and  $y$ -planes
- ◆ **Alternating Gradient Focusing** often abbreviated “**AG**” and is sometimes called “**Strong Focusing**”
- ◆ Parameters should be tuned with particle properties and oscillation phases for proper operation
  - **F** (Focus) in plane placed where excursions (on average) are small
  - **D** (deFocus) placed where excursions (on average) are large
  - **O** (drift) allows axial separation between elements
- ◆ Focusing lattices often (but not necessarily) periodic
  - Periodic expected to give optimal efficiency
- ◆ Drifts between F and D quadrupoles allow space for: acceleration cells, beam diagnostics, vacuum pumping, ....

Example **Quadrupole FODO periodic lattices** with piecewise constant  $\kappa$

- ◆ FODO: [Focus drift(O) DeFocus Drift(O)] has equal length drifts and same length F and D quadrupoles
- ◆ FODO is simplest possible realization of “alternating gradient” focusing
  - Can also have thin lens limit of finite axial length magnets in FODO lattice

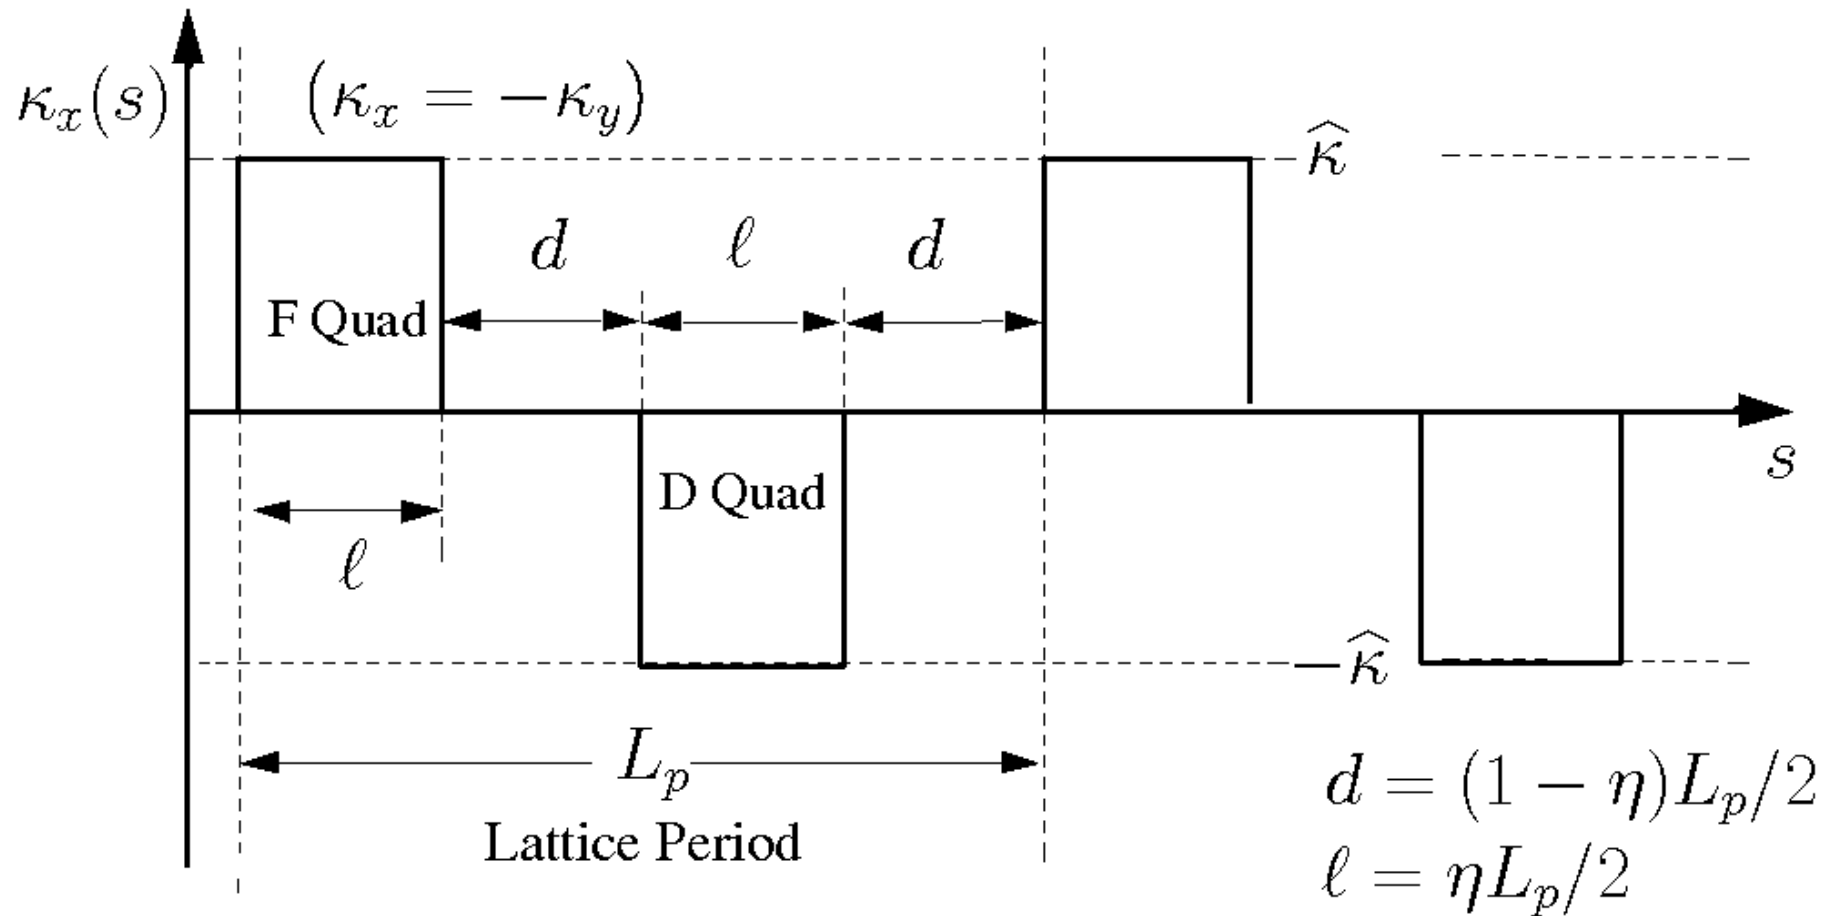



$$\eta = \text{Occupancy} \in (0, 1]$$

/// Example: Particle Orbits in a FODO Periodic Quadrupole Focusing Lattice:

Particle phase-space in  $x$ - $x'$  with only hard-edge applied field

$$L_p = 0.5 \text{ m} \quad \kappa = \pm 50 \text{ rad/m}^2 \text{ in Quads} \quad x(0) = 1 \text{ mm}$$

$$\eta = 0.5 \quad \phi \simeq 0 \quad \gamma_b \beta_b = \text{const} \quad x'(0) = 0$$

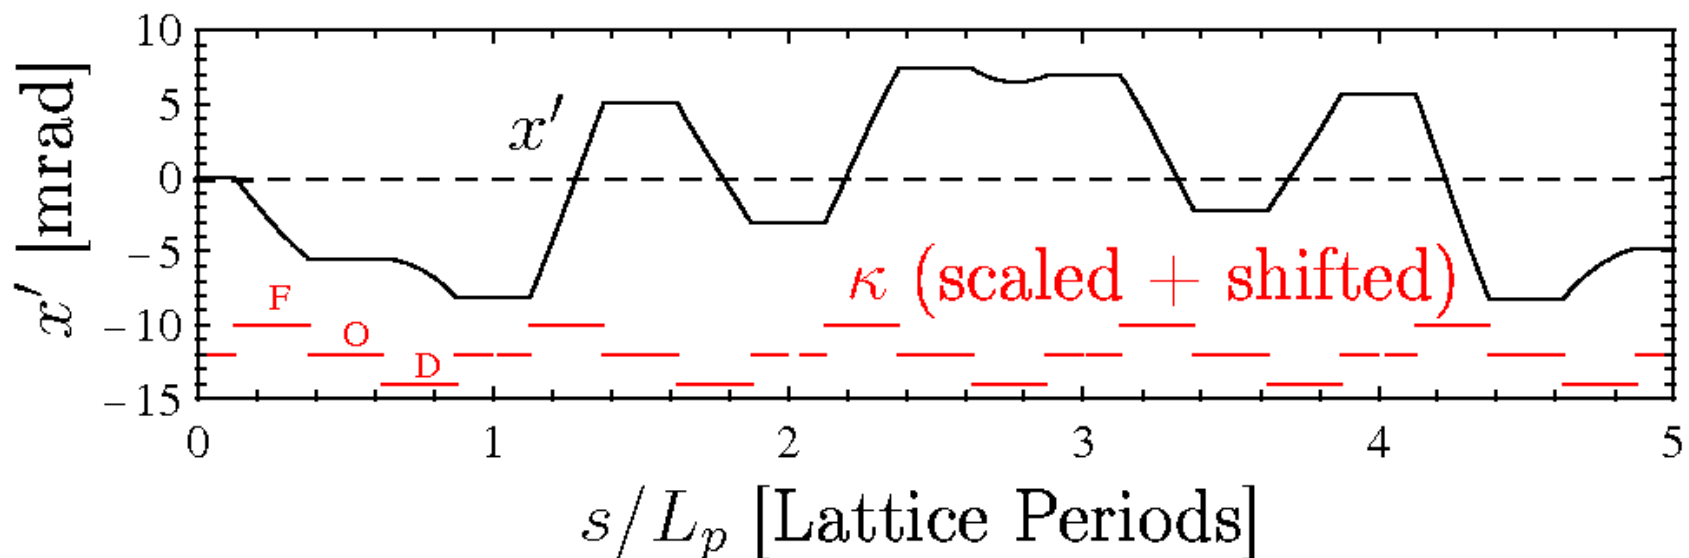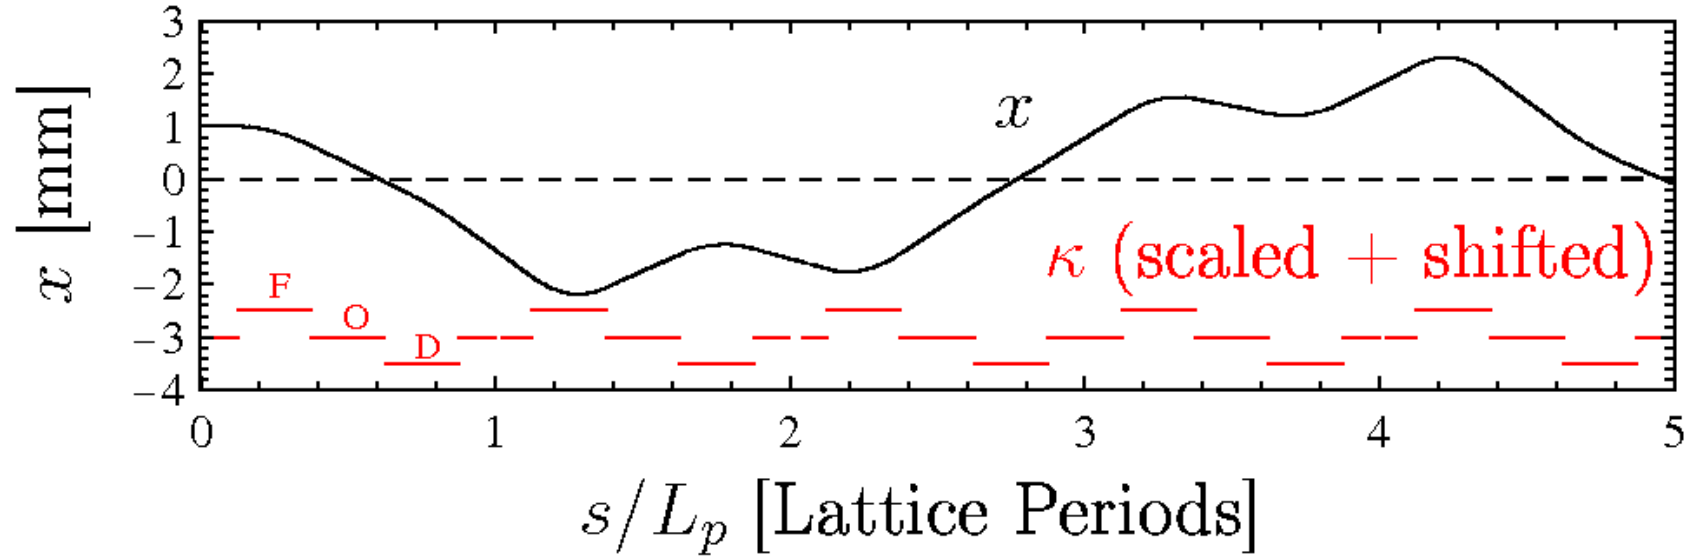

## Comments on Orbits:


- ◆ Orbits strongly deviate from simple harmonic form due to AG focusing
  - Multiple harmonics present
- ◆ Orbit tends to be farther from axis in focusing quadrupoles and closer to axis in defocusing quadrupoles to provide net focusing
- ◆ Will find later that if the focusing is sufficiently strong that the orbit can become unstable (see: S5)
- ◆ y-orbit has the same properties as x-orbit due to the periodic structure and AG focusing
- ◆ If quadrupoles are rotated about their z-axis of symmetry, then the x- and y-equations become cross-coupled. This is called quadrupole skew coupling (see: Appendix A)

Some properties of particle orbits in quadrupoles with  $\kappa = \text{const}$  will be analyzed in the problem sets

# S2D: Alternating Gradient Quadrupole Focusing

## Magnetic Quadrupoles

In the axial center of a long magnetic quadrupole, model fields as 2D transverse

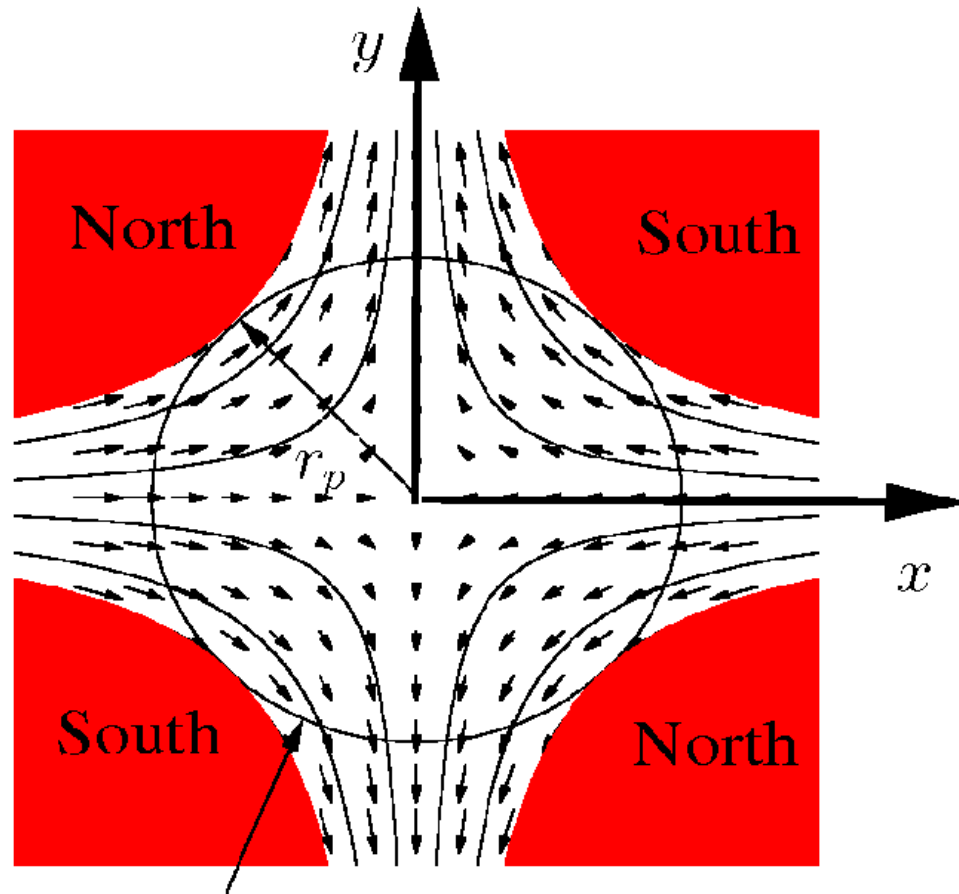

Conducting Beam Pipe:  $r = r_p$

Poles:  $xy = \pm \frac{r_p^2}{2}$

- ◆ Magnetic (ideal iron) poles hyperbolic
- ◆ Structure infinitely extruded along  $z$

### 2D Transverse Fields

$$\mathbf{E}^a = 0$$

$$B_x^a = Gy$$

$$B_y^a = Gx$$

$$B_z^a = 0$$

$$G \equiv \frac{B_q}{r_p} = \frac{\partial B_x^a}{\partial y} = \frac{\partial B_y^a}{\partial x}$$

= Magnetic Gradient

$$B_q = |\mathbf{B}^a|_{r=r_p} = \text{Pole Field}$$

$$r_p = \text{Pipe Radius}$$

Analogously to the electric quadrupole case, take  $G = G(s)$

- ◆ Same comments made on electric quadrupole fringe in **S2C** are directly applicable to magnetic quadrupoles

**Magnetic quadrupole equations of motion:**

- ◆ Insert field components into linear applied field equations and collect terms

$$x'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} x' + \kappa(s)x = - \frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial x}$$

$$y'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} y' - \kappa(s)y = - \frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial y}$$


$$\kappa(s) = \frac{qG}{m\gamma_b \beta_b c} = \frac{G}{[B\rho]}$$

$$G = \frac{\partial B_x^a}{\partial y} = \frac{\partial B_y^a}{\partial x} = \frac{B_q}{r_p} \quad [B\rho] = \frac{m\gamma_b \beta_b c}{q}$$

- ◆ Equations identical to the electric quadrupole case in terms of  $\kappa(s)$
- ◆ All comments made on electric quadrupole focusing lattice are immediately applicable to magnetic quadrupoles: just apply different  $\kappa$  definition in design

## S2E: Solenoidal Focusing

The field of an ideal **magnetic solenoid** is invariant under transverse rotations about its axis of symmetry ( $z$ ) and can be expanded in terms of the on-axis field as follows:

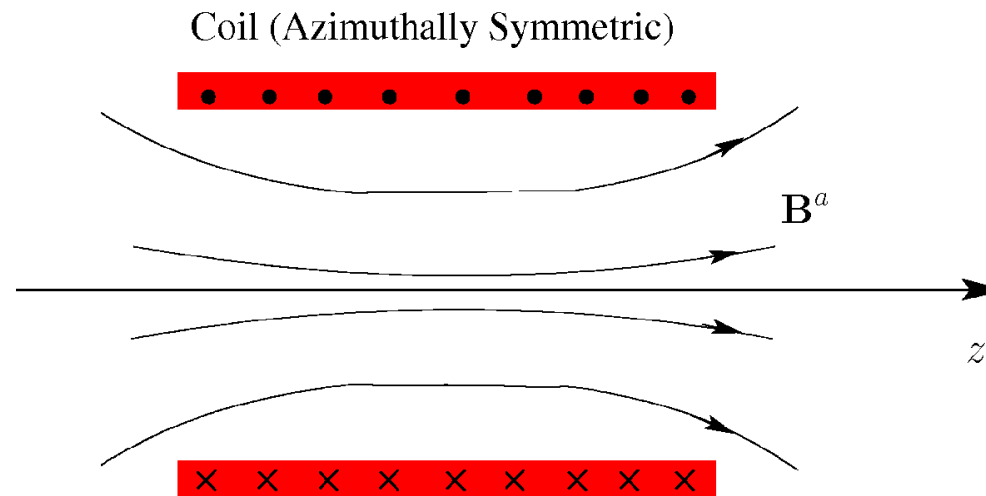

$$\mathbf{E}^a = 0$$

$$\mathbf{B}_{\perp}^a = \frac{1}{2} \sum_{\nu=1}^{\infty} \frac{(-1)^{\nu}}{\nu!(\nu-1)!} \frac{\partial^{2\nu-1} B_{z0}(z)}{\partial z^{2\nu-1}} \left( \frac{|\mathbf{x}_{\perp}|}{2} \right)^{2\nu-2} \mathbf{x}_{\perp}$$

$$B_z^a = B_{z0}(z) + \sum_{\nu=1}^{\infty} \frac{(-1)^{\nu}}{(\nu!)^2} \frac{\partial^{2\nu} B_{z0}(z)}{\partial z^{2\nu}} \left( \frac{|\mathbf{x}_{\perp}|}{2} \right)^{2\nu}$$

$$B_{z0}(z) \equiv B_z^a(\mathbf{x}_{\perp} = 0, z) = \text{On-Axis Field}$$

See Reiser,  
*Theory and Design  
of Charged  
Particle Beams*,  
Sec. 3.3.1

For modeling, we truncate the expansion using only leading-order terms to obtain:

- Corresponds to **linear dynamics** in the equations of motion

$$\begin{aligned} B_x^a &= -\frac{1}{2} \frac{\partial B_{z0}(z)}{\partial z} x \\ B_y^a &= -\frac{1}{2} \frac{\partial B_{z0}(z)}{\partial z} y & B_{z0}(z) &\equiv B_z^a(\mathbf{x}_\perp = 0, z) \\ B_z^a &= B_{z0}(z) & &= \text{On-Axis Field} \end{aligned}$$

Note that this truncated expansion is **divergence free**:

$$\nabla \cdot \mathbf{B}^a = -\frac{1}{2} \frac{\partial B_{z0}}{\partial z} \frac{\partial}{\partial \mathbf{x}_\perp} \cdot \mathbf{x}_\perp + \frac{\partial}{\partial z} B_{z0} = 0$$

but not curl free within the vacuum aperture:

$$\begin{aligned} \nabla \times \mathbf{B}^a &= \frac{1}{2} \frac{\partial^2 B_{z0}(z)}{\partial z^2} (-\hat{\mathbf{x}}y + \hat{\mathbf{y}}x) \\ &= \frac{1}{2} \frac{\partial^2 B_{z0}(z)}{\partial z^2} r(-\hat{\mathbf{x}} \sin \theta + \hat{\mathbf{y}} \cos \theta) = \frac{1}{2} \frac{\partial^2 B_{z0}(z)}{\partial z^2} r \hat{\theta} \end{aligned}$$



## Solenoid equations of motion:

- ◆ Insert field components into equations of motion and collect terms

$$x'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} x' - \frac{\omega_c'(s)}{2\gamma_b \beta_b c} y - \frac{\omega_c(s)}{\gamma_b \beta_b c} y' = -\frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial x}$$


$$y'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} y' + \frac{\omega_c'(s)}{2\gamma_b \beta_b c} x + \frac{\omega_c(s)}{\gamma_b \beta_b c} x' = -\frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial y}$$

$$\omega_c(s) = \frac{qB_{z0}(s)}{m} = \text{Cyclotron Frequency}$$

(in applied axial magnetic field)

- ◆ Equations are linearly **cross-coupled** in the applied field terms
  - x equation depends on y, y'
  - y equation depends on x, x'

It can be shown (see: **Appendix B**) that the linear cross-coupling in the applied field can be removed by an s-varying transformation to a rotating “Larmor” frame:

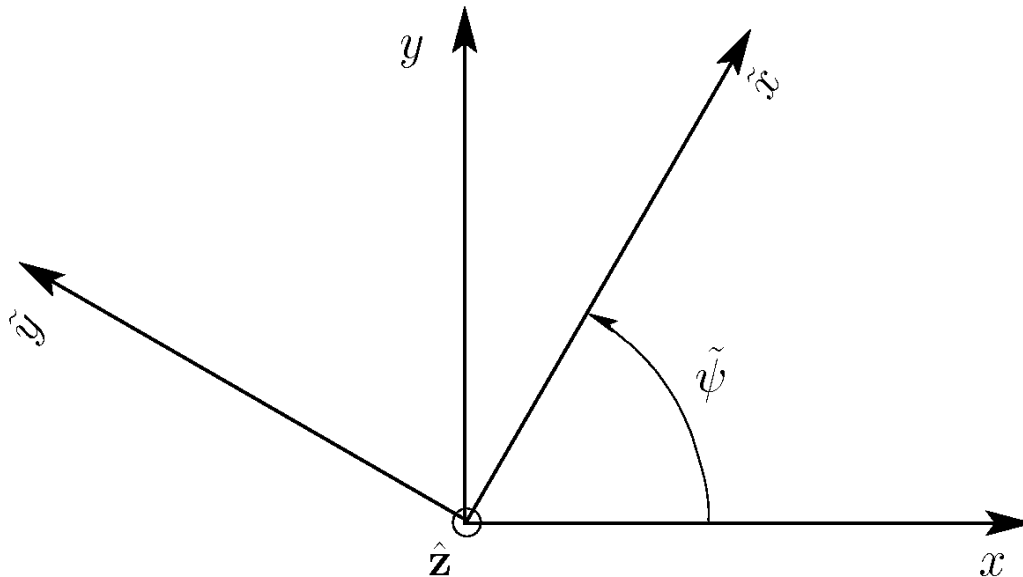

~ used to denote rotating frame variables

$$\tilde{x} = x \cos \tilde{\psi}(s) + y \sin \tilde{\psi}(s)$$

$$\tilde{y} = -x \sin \tilde{\psi}(s) + y \cos \tilde{\psi}(s)$$

$$\tilde{\psi}(s) = - \int_{s_i}^s d\bar{s} k_L(\bar{s})$$

$$k_L(s) \equiv \frac{\omega_c(s)}{2\gamma_b \beta_b c}$$

= Larmor  
wave number

$s = s_i$  defines  
initial condition

If the beam space-charge is *axisymmetric*:

$$\frac{\partial \phi}{\partial \mathbf{x}_{\perp}} = \frac{\partial \phi}{\partial r} \frac{\partial r}{\partial \mathbf{x}_{\perp}} = \frac{\partial \phi}{\partial r} \frac{\mathbf{x}_{\perp}}{r}$$

then the space-charge term also decouples under the **Larmor transformation** and the equations of motion can be expressed in fully **uncoupled form**:

$$\tilde{x}'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \tilde{x}' + \kappa(s) \tilde{x} = - \frac{q}{m \gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial r} \frac{\tilde{x}}{r}$$

$$\tilde{y}'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \tilde{y}' + \kappa(s) \tilde{y} = - \frac{q}{m \gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial r} \frac{\tilde{y}}{r}$$

$$\kappa(s) \equiv \left[ \frac{\omega_c(s)}{2 \gamma_b \beta_b c} \right]^2 = k_L^2(s)$$

Will demonstrate this in problems for the simple case of:

$$\omega_c(s) = \text{const}$$

- Because Larmor frame equations are in the same form as continuous and quadrupole focusing with a different  $\kappa$ , for solenoidal focusing we implicitly work in the Larmor frame and simplify notation by dropping the tildes:

$$\tilde{\mathbf{X}}_{\perp} \rightarrow \mathbf{X}_{\perp}$$

### /// Aside: Notation:

A common theme of this class will be to introduce new effects and generalizations while keeping formulations looking **as similar as possible** to the the most simple representations given. When doing so, we will often use “tildes” to denote transformed variables to stress that the new coordinates have, in fact, a more complicated form that must be interpreted in the context of the analysis being carried out. Some examples:


- ◆ Larmor frame transformations for Solenoidal focusing  
See: **Appendix B**
- ◆ Normalized variables for analysis of accelerating systems  
See: **S10**
- ◆ Coordinates expressed relative to the beam centroid  
See: S.M. Lund, lectures on **Transverse Centroid and Envelope Model**
- ◆ Variables used to analyze Ensil lenses  
See: J.J. Barnard, **Introductory Lectures**

///

Solenoid periodic lattices can be formed similarly to the quadrupole case

- ◆ Drifts placed between solenoids of finite axial length
  - Allows space for diagnostics, pumping, acceleration cells, etc.
- ◆ Analogous equivalence cases to quadrupole
  - Piecewise constant  $\kappa$  often used
- ◆ Fringe can be more important for solenoids

Simple hard-edge solenoid lattice with piecewise constant  $\kappa$


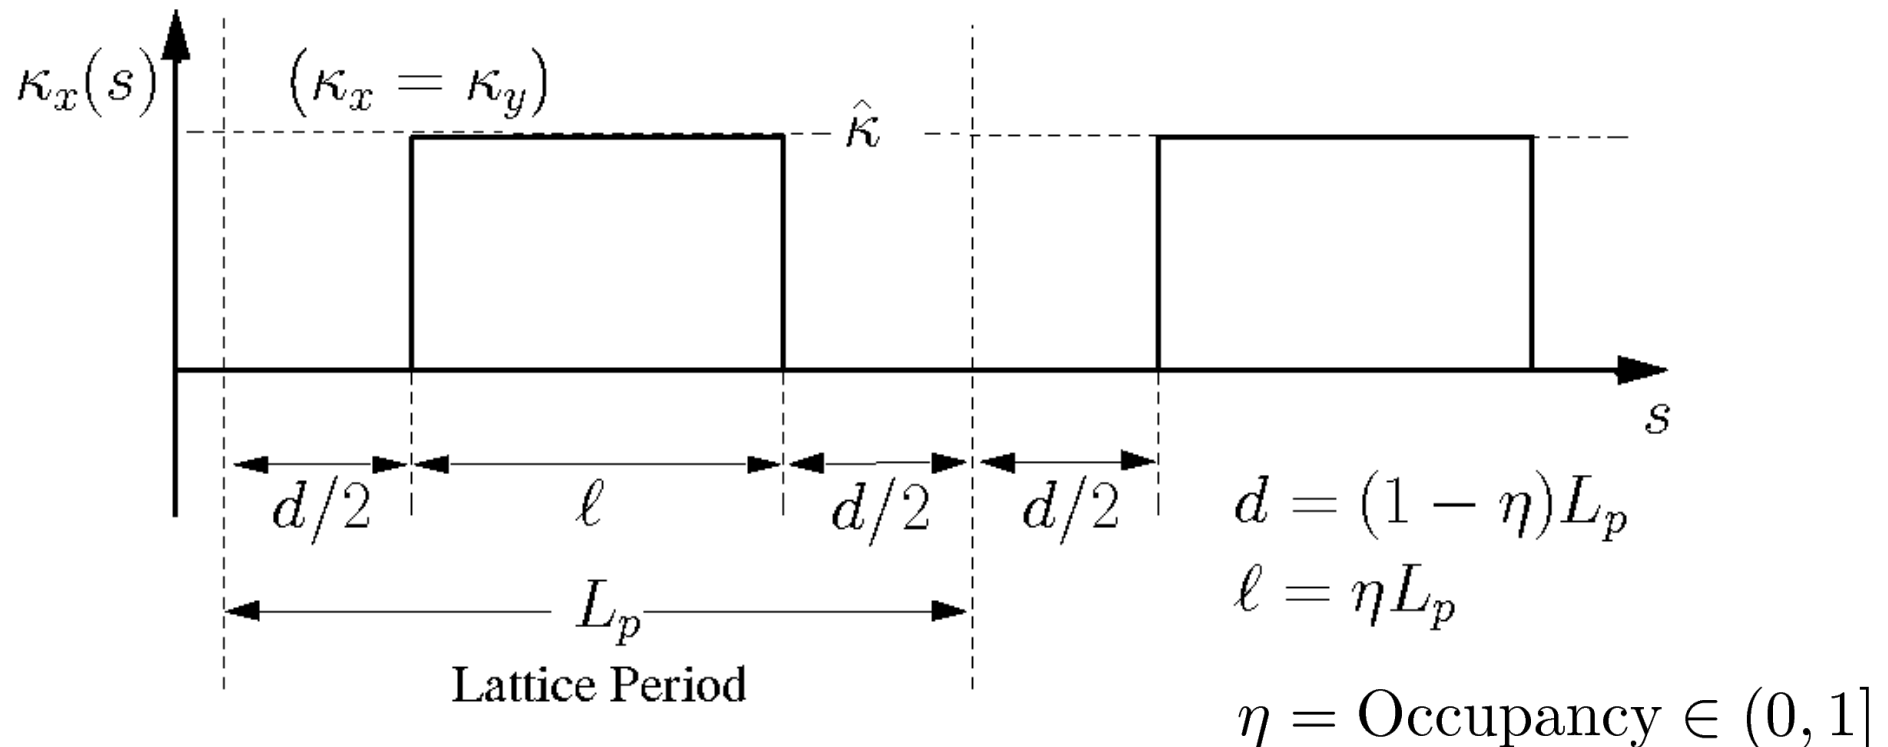


### /// Example: Larmor Frame Particle Orbits in a Periodic Solenoidal Focusing

Lattice:  $\tilde{x} - \tilde{x}'$  phase-space for hard edge elements and applied fields

$$L_p = 0.5 \text{ m} \quad \kappa = 20 \text{ rad/m}^2 \text{ in Solenoids} \quad \tilde{x}(0) = 1 \text{ mm}$$

$$\eta = 0.5 \quad \phi \simeq 0 \quad \gamma_b \beta_b = \text{const} \quad \tilde{x}'(0) = 0$$

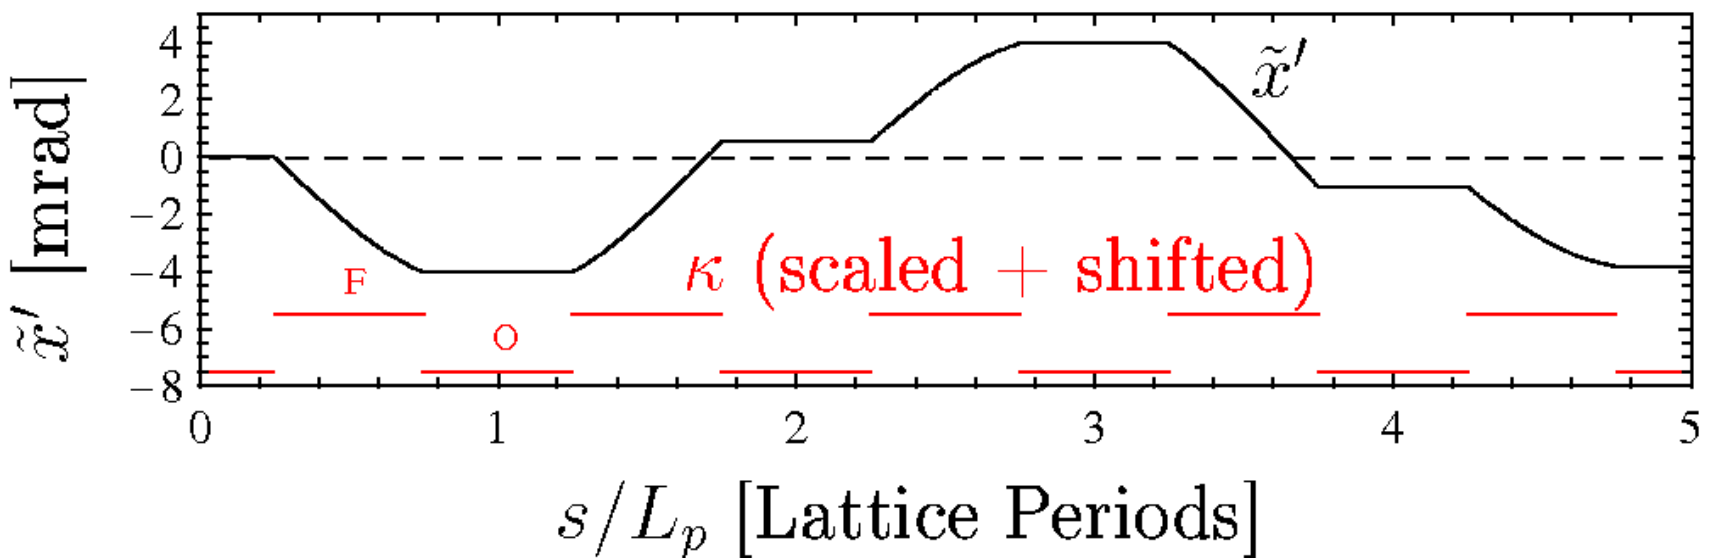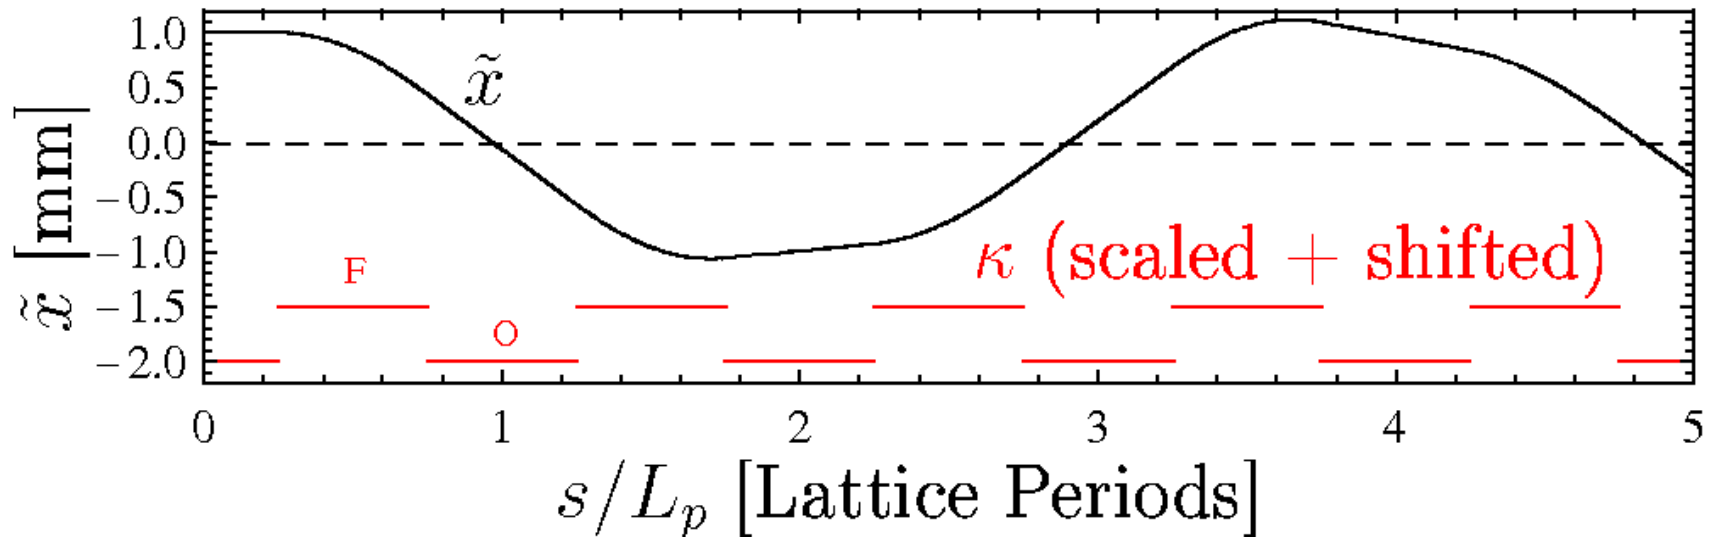

///

## Comments on Orbits:

- ◆ Larmor-frame orbits strongly deviate from simple harmonic form due to periodic focusing
  - Multiple harmonics present
  - Less complicated than quadrupole AG focusing case when interpreted in the Larmor frame due to the optic being focusing in both planes
- ◆ Orbits can be transformed back into the Laboratory frame using Larmor transform (see: **Appendix B**)
  - Laboratory frame orbit exhibits more complicated  $x$ - $y$  plane coupled oscillatory structure
- ◆ Will find later that if the focusing is sufficiently strong that the orbit can become unstable (see: **S5**)
- ◆  $y$ -orbits have same properties as the  $x$ -orbits due to the equations being decoupled and identical in form in each plane

///

Some properties of particle orbits in solenoids with  $\kappa = \text{const}$  will be analyzed in the problem sets

## S2F: Summary of Transverse Particle Equations of Motion

In linear applied focusing channels, without momentum spread or radiation, the particle equations of motion in both the x- and y-planes expressed as:

$$x'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} x' + \kappa_x(s)x = -\frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial}{\partial x} \phi$$
$$y'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} y' + \kappa_y(s)y = -\frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial}{\partial y} \phi$$

$\kappa_x(s)$  = x-focusing function of lattice

$\kappa_y(s)$  = y-focusing function of lattice

Common focusing functions:

Continuous:

$$\kappa_x(s) = \kappa_y(s) = k_{\beta 0}^2 = \text{const}$$

Quadrupole (Electric or Magnetic):

$$\kappa_x(s) = -\kappa_y(s) = \kappa(s)$$

Solenoidal (equations must be interpreted in Larmor Frame: see Appendix B):

$$\kappa_x(s) = \kappa_y(s) = \kappa(s)$$



It is instructive to review the structure of solutions of the transverse particle equations of motion **in the absence of**:

**Space-charge:**  $\frac{\partial\phi}{\partial x} \sim \frac{\partial\phi}{\partial y} \sim 0$

**Acceleration:**  $\gamma_b\beta_b \simeq \text{const} \quad \Longrightarrow \quad \frac{(\gamma_b\beta_b)'}{(\gamma_b\beta_b)} \simeq 0$

In this simple limit, the  $x$  and  $y$ -equations are of the same **Hill's Equation** form:

$$x'' + \kappa_x(s)x = 0$$

$$y'' + \kappa_y(s)y = 0$$

- ◆ These equations are central to transverse dynamics in conventional accelerator physics (weak space-charge and acceleration)
  - Will study how solutions change with space-charge in later lectures


In many cases beam transport lattices are designed where the applied focusing functions are **periodic**:

$$\kappa_x(s + L_p) = \kappa_x(s)$$

$$\kappa_y(s + L_p) = \kappa_y(s)$$

$$L_p = \text{Lattice Period}$$

Common, simple examples of **periodic lattices**:

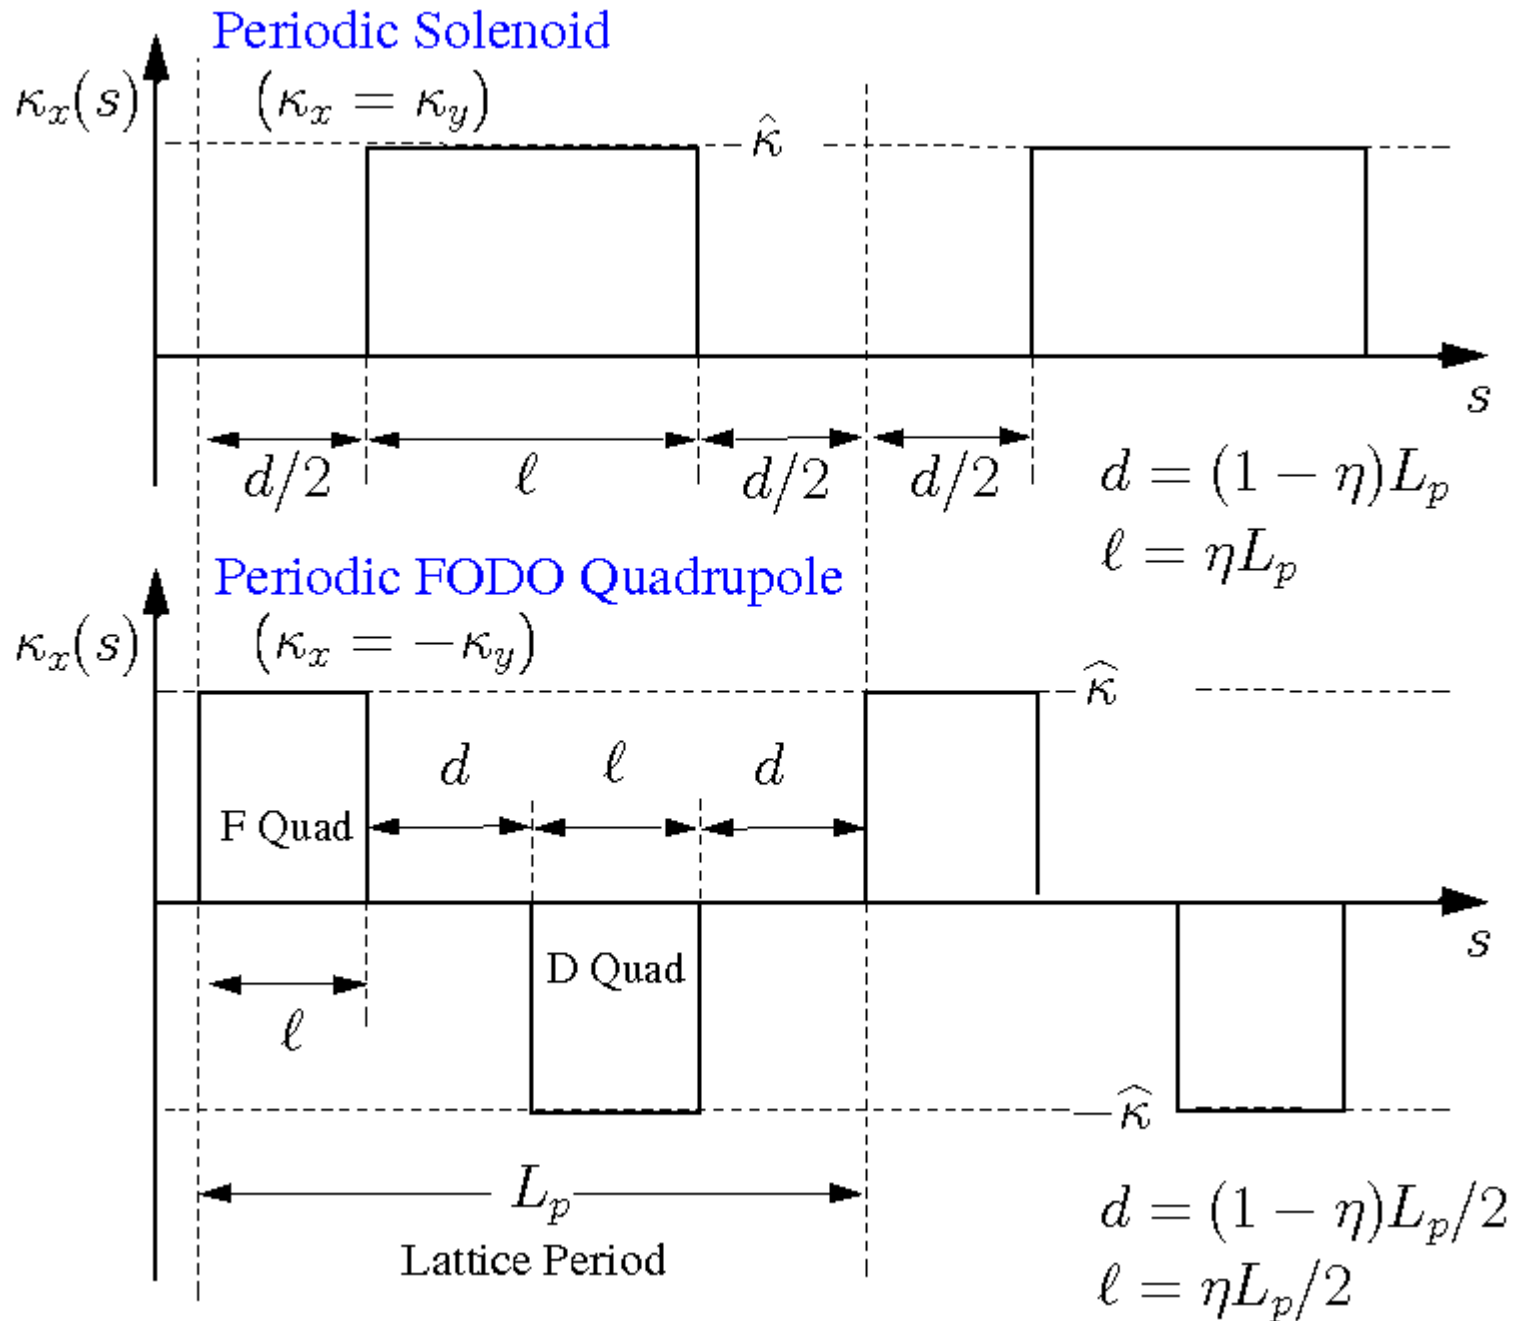

However, the focusing functions need not be periodic:


- ◆ Often take periodic or continuous in this class for simplicity of interpretation

Focusing functions can vary strongly in many common situations:

- ◆ Matching and transition sections
- ◆ Strong acceleration
- ◆ Significantly different elements can occur within periods of lattices in rings
  - “Panofsky” type wide aperture quadrupoles for beam insertion and extraction in a ring

### Example of Non-Periodic Focusing Functions: Beam Matching Section

Maintains alternating-gradient structure but not quasi-periodic

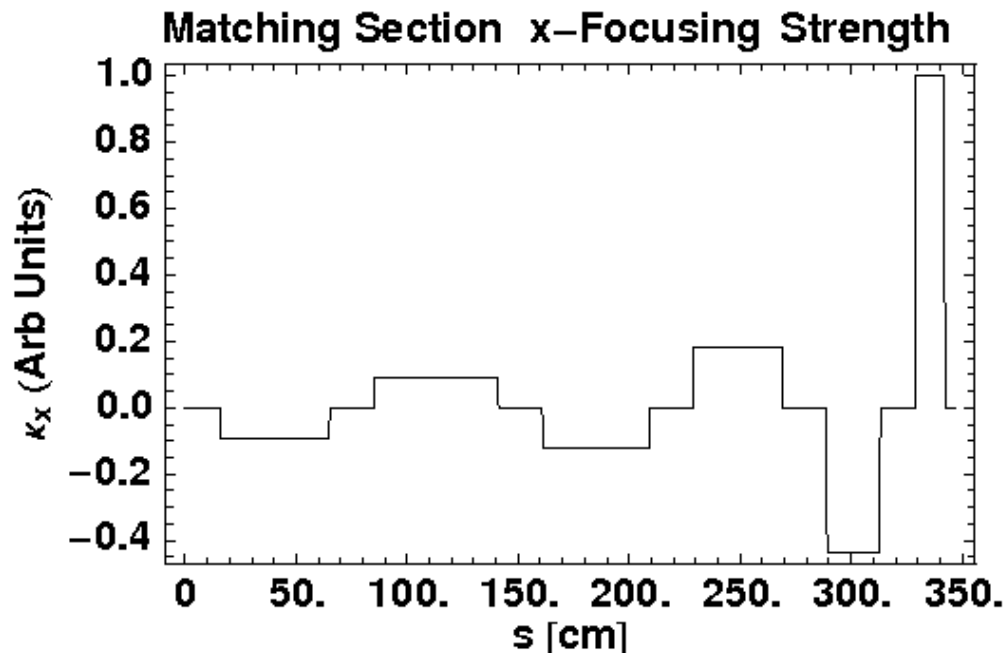

Example corresponds to High Current Experiment Matching Section (hard edge equivalent) at LBNL (2002)

Equations presented in this section apply to a single particle moving in a beam under the action of linear applied focusing forces. In the remaining sections, we will (mostly) neglect space-charge ( $\phi \rightarrow 0$ ) as is conventional in the standard theory of low-intensity accelerators.

- ◆ What we learn from treatment will later aid analysis of space-charge effects
  - Appropriate variable substitutions will be made to apply results
- ◆ Important to understand basic applied field dynamics since space-charge complicates
  - Results in plasma-like collective response

/// **Example:** We will see in **Transverse Centroid and Envelope Descriptions of Beam Evolution** that the linear particle equations of motion can be applied to analyze the evolution of a beam when image charges are neglected


$$x \rightarrow x_c \equiv \langle x \rangle_{\perp} \quad x - \text{centroid}$$

$$y \rightarrow y_c \equiv \langle y \rangle_{\perp} \quad y - \text{centroid}$$

///

## Appendix A: Quadrupole Skew Coupling

Consider a quadrupole **actively rotated** through an angle  $\psi$  about the z-axis:

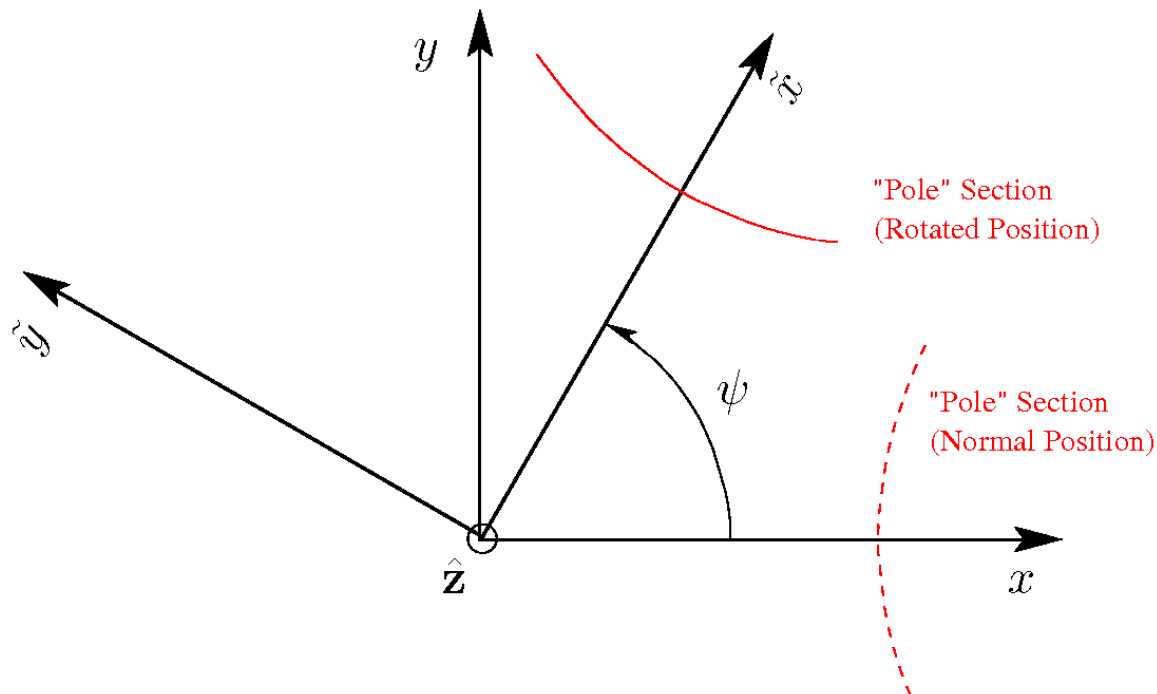

### Transforms

$$\tilde{x} = x \cos \psi + y \sin \psi$$

$$\tilde{y} = -x \sin \psi + y \cos \psi$$

$$x = \tilde{x} \cos \psi - \tilde{y} \sin \psi$$

$$y = \tilde{x} \sin \psi + \tilde{y} \cos \psi$$

### Normal Orientation Fields

#### Electric

$$E_x^a = -Gx$$

$$E_y^a = Gy$$

$$G = G(s)$$

= Field Gradient (Electric or Magnetic)

#### Magnetic

$$B_x^a = Gy$$

$$B_y^a = Gx$$

Note: units of G different in electric and magnetic cases

## Rotated Fields

### Electric

$$\begin{aligned} E_x^a &= E_{\tilde{x}}^a \cos \psi - E_{\tilde{y}}^a \sin \psi & E_{\tilde{x}}^a &= -G\tilde{x} = -G(x \cos \psi + y \sin \psi) \\ E_y^a &= E_{\tilde{x}}^a \sin \psi + E_{\tilde{y}}^a \cos \psi & E_{\tilde{y}}^a &= G\tilde{y} = G(-x \sin \psi + y \cos \psi) \end{aligned}$$

Combine equations, collect terms, and apply trigonometric identities to obtain:

$$\begin{aligned} E_x^a &= -G \cos(2\psi)x - G \sin(2\psi)y \\ E_y^a &= -G \sin(2\psi)x + G \cos(2\psi)y \end{aligned}$$

$$\begin{aligned} 2 \sin \psi \cos \psi &= \sin(2\psi) \\ \cos^2 \psi - \sin^2 \psi &= \cos(2\psi) \end{aligned}$$

### Magnetic

$$\begin{aligned} B_x^a &= B_{\tilde{x}}^a \cos \psi - B_{\tilde{y}}^a \sin \psi & B_{\tilde{x}}^a &= G\tilde{y} = G(-x \sin \psi + y \cos \psi) \\ B_y^a &= B_{\tilde{x}}^a \sin \psi + B_{\tilde{y}}^a \cos \psi & B_{\tilde{y}}^a &= G\tilde{x} = G(x \cos \psi + y \sin \psi) \end{aligned}$$

Combine equations, collect terms, and apply trigonometric identities to obtain:

$$\begin{aligned} B_x^a &= -G \sin(2\psi)x + G \cos(2\psi)y \\ B_y^a &= G \cos(2\psi)x + G \sin(2\psi)y \end{aligned}$$

For *both* **electric** and **magnetic** focusing quadrupoles, these field component projections can be inserted in the linear field Eqns of motion to obtain:

### Skew Coupled Quadrupole Equations of Motion

$$x'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} x' + \kappa \cos(2\psi)x + \kappa \sin(2\psi)y = -\frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial x}$$

$$y'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} y' - \kappa \cos(2\psi)y + \kappa \sin(2\psi)x = -\frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial y}$$

$$\kappa = \begin{cases} \frac{G}{\beta_b c [B\rho]}, & \text{Electric Focusing} \\ \frac{G}{[B\rho]}, & \text{Magnetic Focusing} \end{cases}$$

System is **skew coupled**:

- ◆ x-equation depends on  $y, y'$  and y-equation on  $x, x'$  for  $\psi \neq 0, \pi, 2\pi, \dots$

Skew-coupling considerably complicates dynamics

- ◆ Unless otherwise specified, we consider only quadrupoles with “normal” orientation with  $\psi = 0$
- ◆ Skew coupling errors or intentional skew couplings can be important
  - Leads to transfer of oscillations energy between  $x$  and  $y$ -planes
  - Invariants much more complicated to construct/interpret

The skew coupled equations of motion can be alternatively derived by actively rotating the quadrupole equation of motion in the form:

$$x'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} x' + \kappa(s)x = -\frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial x}$$
$$y'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} y' - \kappa(s)y = -\frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial y}$$

- ◆ Steps are then identical whether quadrupoles are electric *or* magnetic



## Appendix B: The Larmor Transform to Express Solenoidal Focused Particle Equations of Motion in Uncoupled Form

Solenoid equations of motion:

$$x'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} x' - \frac{\omega'_c(s)}{2\gamma_b \beta_b c} y - \frac{\omega_c(s)}{\gamma_b \beta_b c} y' = -\frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial x}$$

$$y'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} y' + \frac{\omega'_c(s)}{2\gamma_b \beta_b c} x + \frac{\omega_c(s)}{\gamma_b \beta_b c} x' = -\frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial y}$$

$$\omega_c(s) = \frac{qB_{z0}(s)}{m} = \text{Cyclotron Frequency}$$

(in applied axial magnetic field)

To simplify algebra, introduce the **complex** coordinate

$$\underline{z} \equiv x + iy \quad i \equiv \sqrt{-1}$$

Note\* context clarifies use of  $i$   
(particle index, initial cond, complex  $i$ )

Then the two equations can be expressed as a single complex equation

$$\underline{z}'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \underline{z}' + i \frac{\omega'_c(s)}{2\gamma_b \beta_b c} \underline{z} + i \frac{\omega_c(s)}{\gamma_b \beta_b c} \underline{z}' = -\frac{q}{m\gamma_b^3 \beta_b^2 c^2} \left( \frac{\partial \phi}{\partial x} + i \frac{\partial \phi}{\partial y} \right)$$

**B1**

If the potential is also axisymmetric with  $\phi = \phi(r)$  :

$$\frac{\partial \phi}{\partial x} + i \frac{\partial \phi}{\partial y} = \frac{\partial \phi}{\partial r} \frac{z}{r} \quad r \equiv \sqrt{x^2 + y^2}$$


then the complex form equation of motion reduces to:

$$\underline{z}'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \underline{z}' + i \frac{\omega_c'(s)}{2\gamma_b \beta_b c} \underline{z} + i \frac{\omega_c(s)}{\gamma_b \beta_b c} \underline{z}' = - \frac{q}{m \gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial r} \frac{z}{r}$$

Following Wiedemann, Vol II, pg 82, introduce a transformed complex variable that is a local (s-varying) rotation:

$$\tilde{z} \equiv z e^{-i\tilde{\psi}(s)} = \tilde{x} + i\tilde{y}$$

$\tilde{\psi}(s)$  = phase-function  
(real-valued)

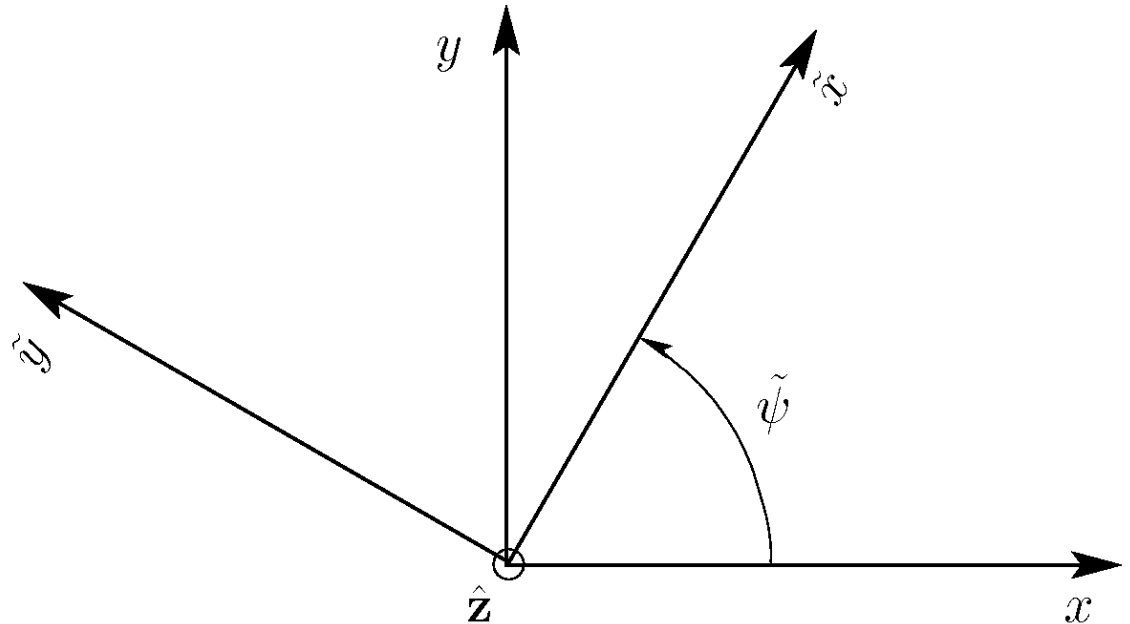

Then:

$$\underline{z} = \underline{\tilde{z}} e^{i\tilde{\psi}}$$

$$\underline{z}' = \left( \underline{\tilde{z}}' + i\tilde{\psi}' \underline{\tilde{z}} \right) e^{i\tilde{\psi}}$$

$$\underline{z}'' = \left( \underline{\tilde{z}}'' + 2i\tilde{\psi}' \underline{\tilde{z}}' + i\tilde{\psi}'' \underline{\tilde{z}} - \tilde{\psi}'^2 \underline{\tilde{z}} \right) e^{i\tilde{\psi}}$$

and the complex form equations of motion become:

$$\begin{aligned} \underline{\tilde{z}}'' + \left[ i \left( 2\tilde{\psi}' + \frac{\omega_c}{\gamma_b \beta_b c} \right) + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \right] \underline{\tilde{z}}' \\ + \left[ -\tilde{\psi}'^2 - \frac{\omega_c}{\gamma_b \beta_b c} \tilde{\psi}' + i \left( \tilde{\psi}'' + \frac{\omega'_c(s)}{2\gamma_b \beta_b c} + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \tilde{\psi}' \right) \right] \underline{\tilde{z}} \\ = - \frac{q}{m \gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial r} \frac{\underline{\tilde{z}}}{r} \end{aligned}$$

Free to choose the form of  $\tilde{\psi}$  Can choose to eliminate imaginary terms in [ ... ] by taking:

$$\boxed{\tilde{\psi}' \equiv - \frac{\omega_c}{2\gamma_b \beta_b c}} \quad \Longrightarrow \quad \tilde{\psi}'' = - \frac{\omega'_c}{2\gamma_b \beta_b c} + \frac{\omega_c}{2c} \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)^2}$$

Using these results, the complex form equations of motion reduce to:

B4

$$\underline{\tilde{z}}'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \underline{\tilde{z}}' + \left( \frac{\omega_c}{2\gamma_b \beta_b c} \right)^2 \underline{\tilde{z}} = - \frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial r} \frac{\underline{\tilde{z}}}{r}$$

Or using  $\underline{\tilde{z}} = \tilde{x} + i\tilde{y}$ , the equations can be expressed in decoupled  $\tilde{x}$ ,  $\tilde{y}$  variables in the **Larmor Frame** as:

$$\tilde{x} + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \tilde{x}' + \kappa_s(s) \tilde{x} = - \frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial r} \frac{\tilde{x}}{r}$$

$$\tilde{y} + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \tilde{y}' + \kappa_s(s) \tilde{y} = - \frac{q}{m\gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial r} \frac{\tilde{y}}{r}$$

$$\kappa_s(s) \equiv k_L^2(s) \quad k_L(s) \equiv \frac{\omega_c(s)}{2\gamma_b \beta_b c} \quad \omega_c(s) \equiv \frac{qB_{z0}(s)}{m}$$

= Larmor Wave-Number

Equations of motion are uncoupled but must be interpreted in the rotating Larmor frame

- ◆ Same form as quadrupoles but with focusing function same sign in each plane

The rotational transformation to the **Larmor Frame** can be effected by integrating the equation for  $\tilde{\psi}' = -\frac{\omega_c}{2\gamma_b\beta_b c}$

$$\tilde{\psi}(s) = -\frac{1}{2\gamma_b\beta_b c} \int_{s_i}^s d\tilde{s} \omega_c(\tilde{s}) = -\int_{s_i}^s d\tilde{s} k_L(\tilde{s})$$

Here,  $s_i$  is some value of  $s$  where the initial conditions are taken.

- ♦ Take  $s = s_i$  where axial field is zero for simplest interpretation (see: pg **B6**)

Because

$$\tilde{\psi}' = -\frac{\omega_c}{2\gamma_b\beta_b c}$$

the local  $\tilde{x} - \tilde{y}$  Larmor frame is rotating at  $\frac{1}{2}$  of the local  $s$ -varying cyclotron frequency

- ♦ If  $B_{z0} = \text{const}$ , then the Larmor frame is uniformly rotating as is well known from elementary textbooks (see problem sets)

The complex form phase-space transformation and inverse transformations are:

$$\begin{aligned}
 \underline{z} &= \underline{\tilde{z}} e^{i\tilde{\psi}} & \underline{\tilde{z}} &= \underline{z} e^{-i\tilde{\psi}} \\
 \underline{z}' &= \left( \underline{\tilde{z}}' + i\tilde{\psi}' \underline{\tilde{z}} \right) e^{i\tilde{\psi}} & \underline{\tilde{z}}' &= \left( \underline{z}' - i\tilde{\psi}' \underline{z} \right) e^{-i\tilde{\psi}} \\
 \underline{z} &= x + iy & \underline{\tilde{z}} &= \tilde{x} + i\tilde{y} & \tilde{\psi}' &= -\frac{\omega_c}{2\gamma_b\beta_b c} = -k_L \\
 \underline{z}' &= x' + iy' & \underline{\tilde{z}}' &= \tilde{x}' + i\tilde{y}'
 \end{aligned}$$

Apply to:

- ◆ Project initial conditions from lab-frame when integrating equations
- ◆ Project integrated solution back to lab-frame to interpret solution

If the initial condition  $s = s_i$  is taken **outside of the magnetic field** where  $B_{z0}(s_i) = 0$ , then:

$$\begin{aligned}
 \tilde{x}(s = s_i) &= x(s = s_i) & \tilde{x}'(s = s_i) &= x'(s = s_i) \\
 \tilde{y}(s = s_i) &= y(s = s_i) & \tilde{y}'(s = s_i) &= y'(s = s_i) \\
 \underline{\tilde{z}}(s = s_i) &= \underline{z}(s = s_i) & \underline{\tilde{z}}'(s = s_i) &= \underline{z}'(s = s_i)
 \end{aligned}$$

The solution in the laboratory frame can be expressed in component form using the real and imaginary parts of the complex form transformations to obtain:

$$\begin{pmatrix} x \\ x' \\ y \\ y' \end{pmatrix} = \begin{pmatrix} \cos \tilde{\psi} & 0 & -\sin \tilde{\psi} & 0 \\ k_L \sin \tilde{\psi} & \cos \tilde{\psi} & k_L \cos \tilde{\psi} & -\sin \tilde{\psi} \\ \sin \tilde{\psi} & 0 & \cos \tilde{\psi} & 0 \\ -k_L \cos \tilde{\psi} & \sin \tilde{\psi} & k_L \sin \tilde{\psi} & \cos \tilde{\psi} \end{pmatrix} \begin{pmatrix} \tilde{x} \\ \tilde{x}' \\ \tilde{y} \\ \tilde{y}' \end{pmatrix}$$

Here we used the transforms and

$$\tilde{\psi}' = -\frac{\omega_c}{2\gamma_b\beta_b} = -k_L$$

$$\underline{\tilde{z}} = \tilde{x} + i\tilde{y}$$

$$\underline{\tilde{z}}' = \tilde{x}' + i\tilde{y}'$$

# S3: Description of Applied Focusing Fields

## S3A: Overview


Applied fields for focusing, bending, and acceleration enter the equations of motion via:

$$\mathbf{E}^a = \text{Applied Electric Field}$$

$$\mathbf{B}^a = \text{Applied Magnetic Field}$$

Generally, these fields are produced by sources (often static or slowly varying in time) located outside an aperture or so-called pipe radius  $r = r_p$ . For example, the **electric** and **magnetic** quadrupoles of **S2**:

### Electric Quadrupole

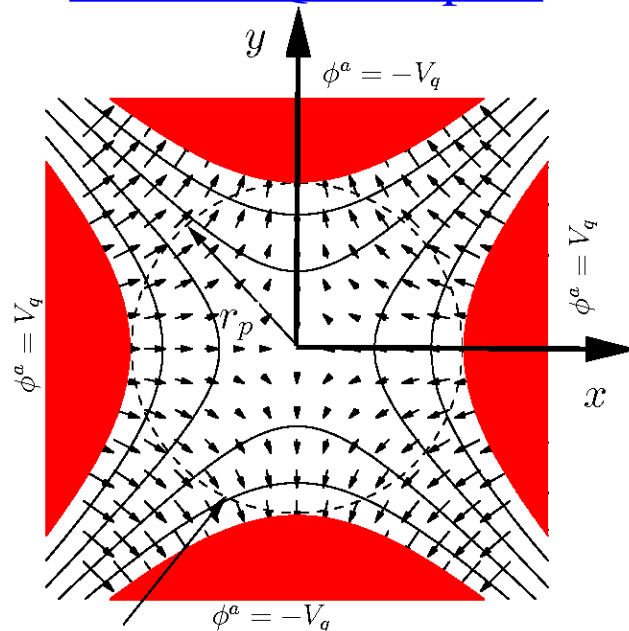


Electrodes Outside of Circle  $r = r_p$   
Electrodes:  $x^2 - y^2 = \mp r_p^2$

Hyperbolic material surfaces outside pipe radius

$$r = r_p$$

### Magnetic Quadrupole

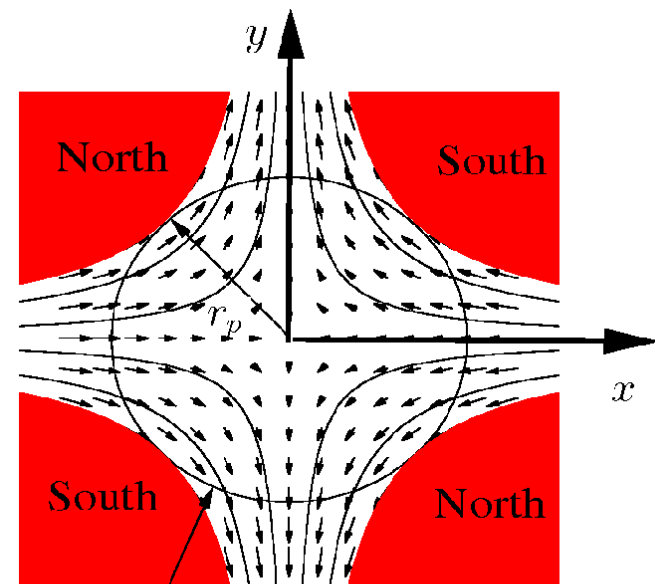

Conducting Beam Pipe:  $r = r_p$   
Poles:  $xy = \pm \frac{r_p^2}{2}$



The fields of such classes of magnets obey the **vacuum Maxwell Equations** within the aperture:

$$\begin{aligned}\nabla \cdot \mathbf{E}^a &= 0 & \nabla \cdot \mathbf{B}^a &= 0 \\ \nabla \times \mathbf{E}^a &= -\frac{\partial}{\partial t} \mathbf{B}^a & \nabla \times \mathbf{B}^a &= \frac{1}{c^2} \frac{\partial}{\partial t} \mathbf{E}^a\end{aligned}$$

If the fields are static or sufficiently slowly varying (quasistatic) where the time derivative terms can be neglected, then the fields in the aperture will obey the **static vacuum Maxwell equations**:

$$\begin{aligned}\nabla \cdot \mathbf{E}^a &= 0 & \nabla \cdot \mathbf{B}^a &= 0 \\ \nabla \times \mathbf{E}^a &= 0 & \nabla \times \mathbf{B}^a &= 0\end{aligned}$$

In general, optical elements are tuned to **limit** the strength of **nonlinear field terms** so the beam experiences primarily **linear applied fields**.

- ◆ Linear fields allow better preservation of beam quality

Removal of *all* nonlinear fields cannot be accomplished


- ◆ 3D structure of the Maxwell equations precludes for finite geometry optics
- ◆ Even in finite geometries deviations from optimal structures and symmetry will result in nonlinear fields

As an example of this, when an ideal 2D iron magnet with infinite hyperbolic poles is truncated radially for finite 2D geometry, this leads to nonlinear focusing fields even in 2D:

- ◆ Truncation necessary along with confinement of return flux in yoke


### Cross-Sections of Iron Quadrupole Magnets

#### Ideal (infinite geometry)

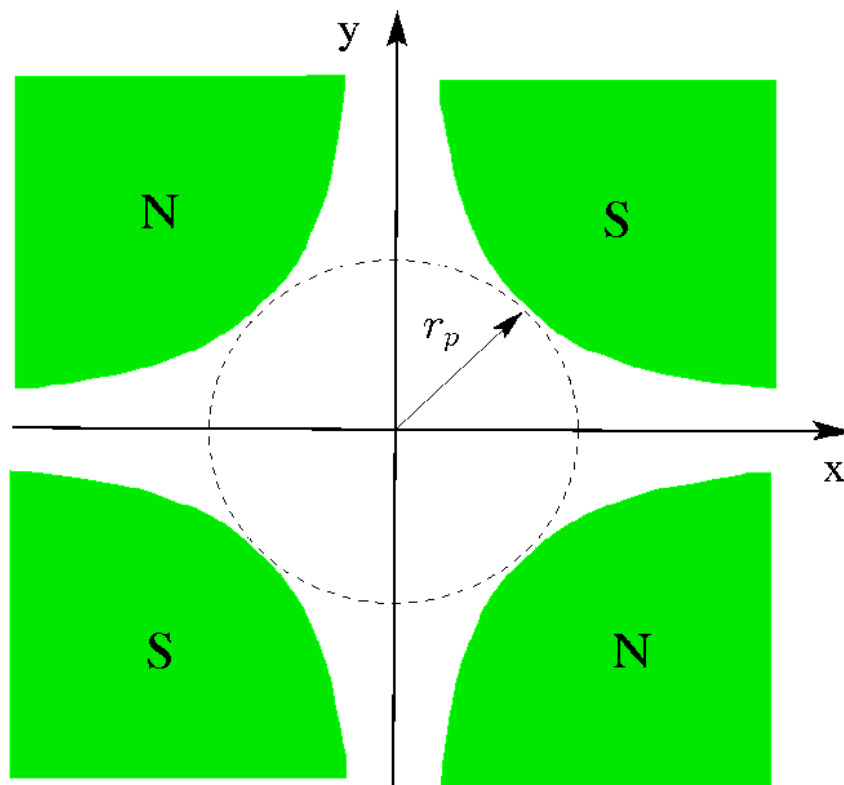

Hyperbolic Iron Pole Sections  
(infinite)

#### Practical (finite geometry)

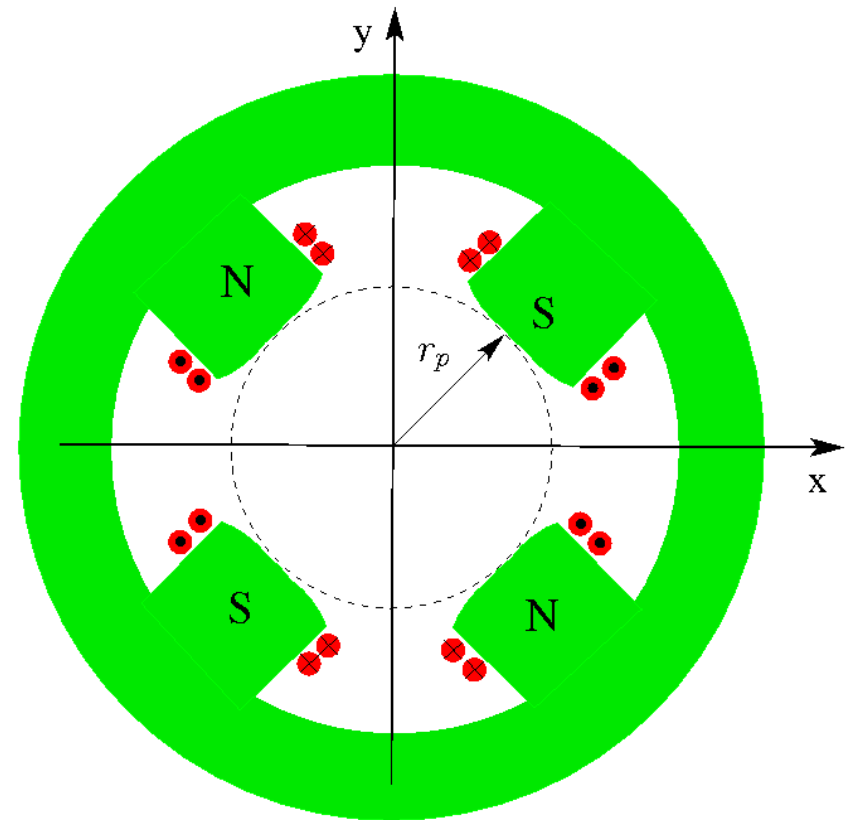

Shaped Iron Pole Sections  
(finite)

The design of optimized electric and magnetic optics for accelerators is a specialized topic with a vast literature. It is not possible to cover this topic in this brief survey. In the remaining part of this section we will overview a limited subset of material on [magnetic optics](#) including:

- ◆ (see: [S3B](#)) [Magnetic field expansions](#) for focusing and bending
- ◆ (see: [S3C](#)) [Hard edge equivalent models](#)
- ◆ (see: [S3D](#)) [2D multipole models](#) and nonlinear field scalings
- ◆ (see: [S3E](#)) [Good field radius](#)

Much of the material presented can be immediately applied to static [Electric Optics](#) since the vacuum Maxwell equations are the same for static Electric  $\mathbf{E}^a$  and Magnetic  $\mathbf{B}^a$  fields in vacuum.

## S3B: Magnetic Field Expansions for Focusing and Bending

Forces from transverse ( $B_z^a = 0$ ) magnetic fields enter the transverse equations of motion (see: **S1**, **S2**) via:

**Force:**  $\mathbf{F}_\perp^a \simeq q\beta_b c \hat{\mathbf{z}} \times \mathbf{B}_\perp^a$

**Field:**  $\mathbf{B}_\perp^a = \hat{\mathbf{x}}B_x^a + \hat{\mathbf{y}}B_y^a$

Combined these give:

$$F_x^a \simeq -q\beta_b c B_y^a$$

$$F_y^a \simeq q\beta_b c B_x^a$$

Field components entering these expressions can be expanded about  $\mathbf{x}_\perp = 0$

◆ Element center and design orbit taken to be at  $\mathbf{x}_\perp = 0$

$$B_x^a = B_x^a(0) + \frac{1}{\partial y} \frac{\partial B_x^a}{\partial y}(0)y + \frac{2}{\partial x} \frac{\partial B_x^a}{\partial x}(0)x$$

Nonlinear Focus

$$+ \frac{1}{2} \frac{\partial^2 B_x^a}{\partial x^2}(0)x^2 + \frac{\partial^2 B_x^a}{\partial x \partial y}(0)xy + \frac{1}{2} \frac{\partial^2 B_x^a}{\partial y^2}(0)y^2 + \dots$$

$$B_y^a = B_y^a(0) + \frac{1}{\partial x} \frac{\partial B_y^a}{\partial x}(0)x + \frac{2}{\partial y} \frac{\partial B_y^a}{\partial y}(0)y$$

Nonlinear Focus

$$+ \frac{1}{2} \frac{\partial^2 B_y^a}{\partial x^2}(0)x^2 + \frac{\partial^2 B_y^a}{\partial x \partial y}(0)xy + \frac{1}{2} \frac{\partial^2 B_y^a}{\partial y^2}(0)y^2 + \dots$$

Terms:

1: Dipole Bend

2: Normal

Quad Focus

3: Skew

Quad Focus

Sources of undesired nonlinear applied field components include:

- ◆ Intrinsic finite 3D geometry and the structure of the Maxwell equations
- ◆ Systematic errors or sub-optimal geometry associated with practical trade-offs in fabricating the optic
- ◆ Random construction errors in individual optical elements
- ◆ Alignment errors of magnets in the lattice giving field projections in unwanted directions
- ◆ Excitation errors effecting the field strength
  - Currents in coils not correct and/or unbalanced

More advanced treatments exploit less simple power-series expansions to express symmetries more clearly:


- ◆ Maxwell equations constrain structure of solutions
  - Expansion coefficients are NOT all independent
- ◆ Forms appropriate for bent coordinate systems in dipole bends can become complicated

## S3C: Hard Edge Equivalent Models

Real 3D magnets can often be modeled with sufficient accuracy by 2D **hard-edge** “**equivalent**” magnets that give the same approximate focusing impulse to the particle as the full 3D magnet


- ▶ Objective is to provide same approximate applied focusing “kick” to particles with different gradient focusing gradient functions  $G(s)$

See Figure Next Slide

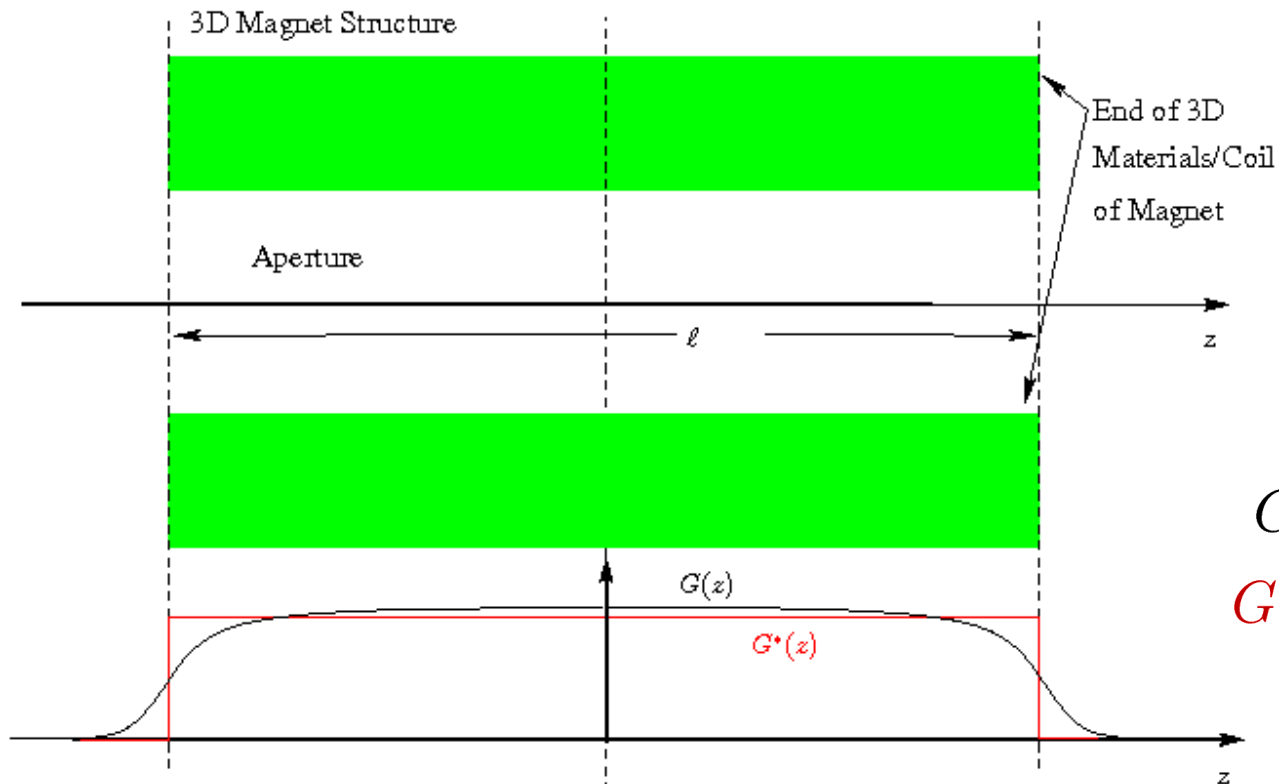

$G(z)$  = 3D Field Gradient

$G^*(z)$  = Hard-Edge Equivalent Field Gradient

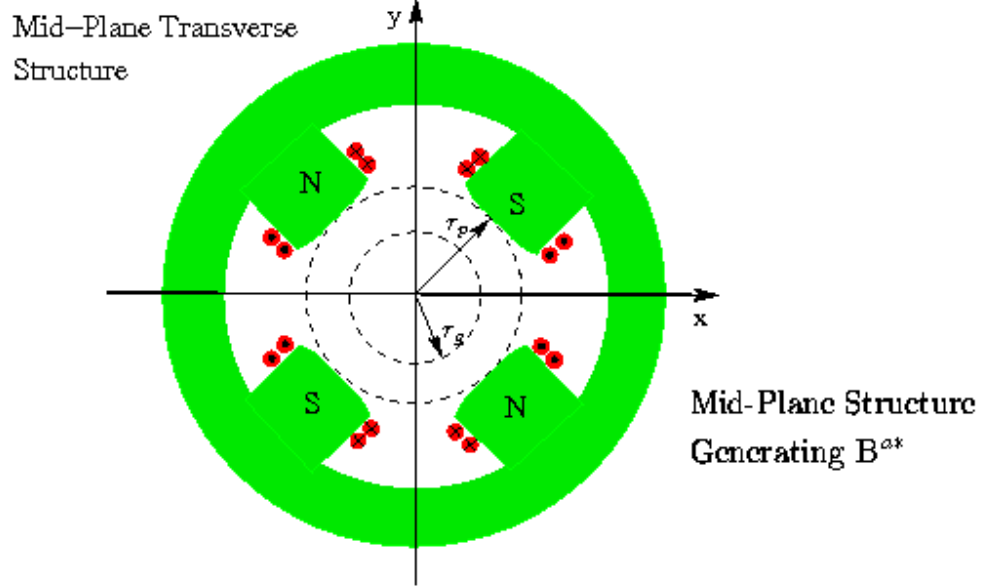

Many prescriptions exist for calculating the effective axial length and strength of hard-edge equivalent models

- ◆ See Review: Lund and Bukh, PRSTAB 7 204801 (2004), Appendix C

Here we overview a simple equivalence method that has been shown to work well:

For a relatively long, but finite axial length magnet with 3D gradient function:

$$G(z) \equiv \left. \frac{\partial B_x^a}{\partial y} \right|_{x=y=0}$$

Take **hard-edge equivalent** parameters:

- ◆ Assume  $z = 0$  at the axial magnet mid-plane

**Gradient:**  $G^* \equiv G(z = 0)$

**Axial Length:**  $\ell \equiv \frac{1}{G(z = 0)} \int_{-\infty}^{\infty} dz G(z)$

- ◆ More advanced equivalences can be made based more on particle optics
  - Disadvantage of such methods is “equivalence” changes with particle energy and must be revisited as optics are tuned



## S3D: 2D Transverse Multipole Magnetic Fields

In many cases, it is sufficient to characterize the field errors in 2D hard-edge equivalent as:

$$B_x(x, y) = \frac{1}{\ell} \int_{-\infty}^{\infty} dz B_x^a(x, y, z)$$

$$B_y(x, y) = \frac{1}{\ell} \int_{-\infty}^{\infty} dz B_y^a(x, y, z)$$

↑
↑  
2D Effective Fields
3D Fields

Operating on the vacuum Maxwell equations with:  $\int_{-\infty}^{\infty} \frac{dz}{\ell} \dots$   
yields the (exact) 2D Transverse Maxwell equations :

$$\frac{\partial B_x(x, y)}{\partial y} = \frac{\partial B_y(x, y)}{\partial x}$$

⇐ From  $\nabla \times \mathbf{B} = 0$

$$\frac{\partial B_x(x, y)}{\partial x} = -\frac{\partial B_y(x, y)}{\partial y}$$

⇐ From  $\nabla \cdot \mathbf{B} = 0$

These equations are recognized as the **Cauchy-Riemann conditions** for a **complex field variable**:

$$\underline{B} = B_y + iB_x \quad i \equiv \sqrt{-1}$$

to be an **analytical function** of the **complex variable**:

$$\underline{z} = x + iy \quad i \equiv \sqrt{-1}$$

Notation:

Underlines denote complex variables

- ◆ Note that the  $x$  and  $y$  components are exchanged from what might be the “expected” complex ordering in the field variable  $\underline{B}$ . This is *not* a typo.
- ◆ The coordinate  $\underline{z}$  has the usual ordering

It follows that  $\underline{B}(\underline{z})$  can be analyzed using the full power of the highly developed theory of analytical functions of a complex variable.

Expand  $\underline{B}(\underline{z})$  as a **Laurent Series** within the vacuum aperture as:

$$\underline{B}(\underline{z}) = B_y + iB_x = \sum_{n=1}^{\infty} \underline{B}_n \left( \frac{\underline{z}}{r_p} \right)^{n-1}$$

$$\underline{B}_n = \text{const (complex)}$$

$$n = \text{Multipole Index}$$

$$r_p = \text{Aperture "Pipe" Radius}$$

The  $\underline{B}_n$  are called “multipole coefficients” and give the structure of the field. The multipole coefficients can be resolved into real and imaginary parts as:

$$\underline{B}_n = b_n + ia_n$$

$b_n \implies$  ”Normal” Multipoles

$a_n \implies$  ”Skew” Multipoles

Some algebra identifies the polynomial **symmetries** of the terms as:

Index $n$	Name	Normal Field Components		Skew Field Components	
		$B_x r_p^{n-1} / b_n$	$B_y r_p^{n-1} / b_n$	$B_x r_p^{n-1} / a_n$	$B_y r_p^{n-1} / a_n$
$n = 1$	Dipole	0	1	1	0
$n = 2$	Quadrupole	$y$	$x$	$x$	$-y$
$n = 3$	Sextupole	$2xy$	$x^2 - y^2$	$x^2 - y^2$	$-2xy$
$n = 4$	Octupole	$3x^2y - y^3$	$x^3 - 3xy^2$	$x^3 - 3xy^2$	$-3x^2y + y^3$
$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$

### Comments:

- ◆ Reason for pole names most apparent from polar representation (see following pages) and sketches of the magnetic pole structure
- ◆ Caution: In Europe, poles are often labeled with index  $n - 1$

## Comments continued:

- Normal and Skew symmetries can be taken as a symmetry *definition*. But this choice makes sense for  $n = 2$  quadrupole focusing terms:

$$F_x = -q\beta_b c B_y = -q\beta_b c B_y (a_2 x - b_2 y) / r_p$$

$$F_y = q\beta_b c B_x = q\beta_b c B_y (a_2 y + b_2 x) / r_p$$


In equations of motion:

$\Rightarrow a_2$ :  $x$ -eqn,  $x$ -focus;  $y$ -eqn,  $y$ -defocus


$\Rightarrow b_2$ :  $x$ -eqn,  $y$ -defocus;  $y$ -eqn,  $x$ -defocus

## Magnetic Pole Symmetries (normal orientation):


### Dipole (n=1)

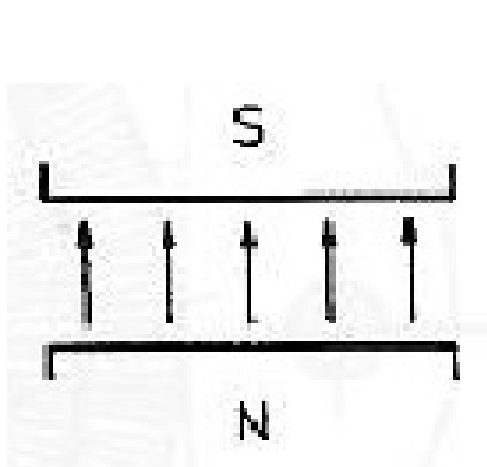

### Quadrupole (n=2)

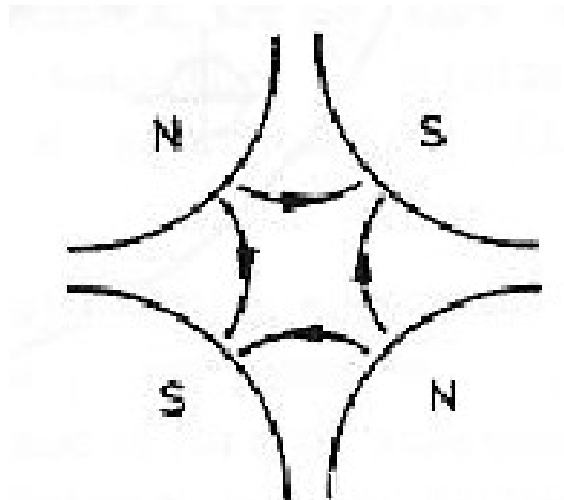

### Sextupole (n=3)

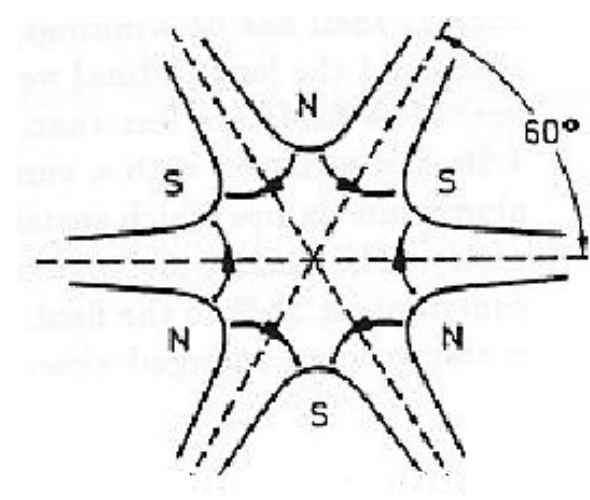

- Actively rotate structures clockwise through an angle of  $\pi / (2n)$  for skew component symmetries

Higher order multipole coefficients (larger  $n$  values) leading to nonlinear focusing forces decrease rapidly within the aperture. To see this use a polar representation for  $\underline{z}$ ,  $\underline{B}_n$

$$\underline{z} = x + iy = r e^{i\theta} \quad r = \sqrt{x^2 + y^2}$$

$$\underline{B}_n = |\underline{B}_n| e^{i\psi_n} \quad \theta = \arctan[y, x]$$

$$\psi_n = \text{Real Const}$$

Thus, the  $n$ th order multipole terms scale as


$$\underline{B}_n \left( \frac{\underline{z}}{r_p} \right)^{n-1} = |\underline{B}_n| \left( \frac{r}{r_p} \right)^{n-1} e^{i[(n-1)\theta + \psi_n]}$$

- ◆ Unless the coefficient  $|\underline{B}_n|$  is very large, high order terms in  $n$  will become small rapidly as  $r_p$  decreases
- ◆ Better field quality can be obtained for a given magnet design by simply making the clear bore  $r_p$  larger, or alternatively using smaller bundles (more tight focus) of particles
  - Larger bore machines/magnets cost more. So designs become trade-off between cost and performance.
  - Stronger focusing can also be unstable (see: **S5**)

## S3E: Good Field Radius

Often a magnet design will have a so-called “good-field” radius  $r = r_g$  that the maximum field errors are specified on.

- ◆ In superior designs the good field radius can be around  $\sim 70\%$  or more of the clear bore aperture to the beginning of material structures of the magnet.
- ◆ Beam particles should evolve with radial excursions with  $r < r_g$

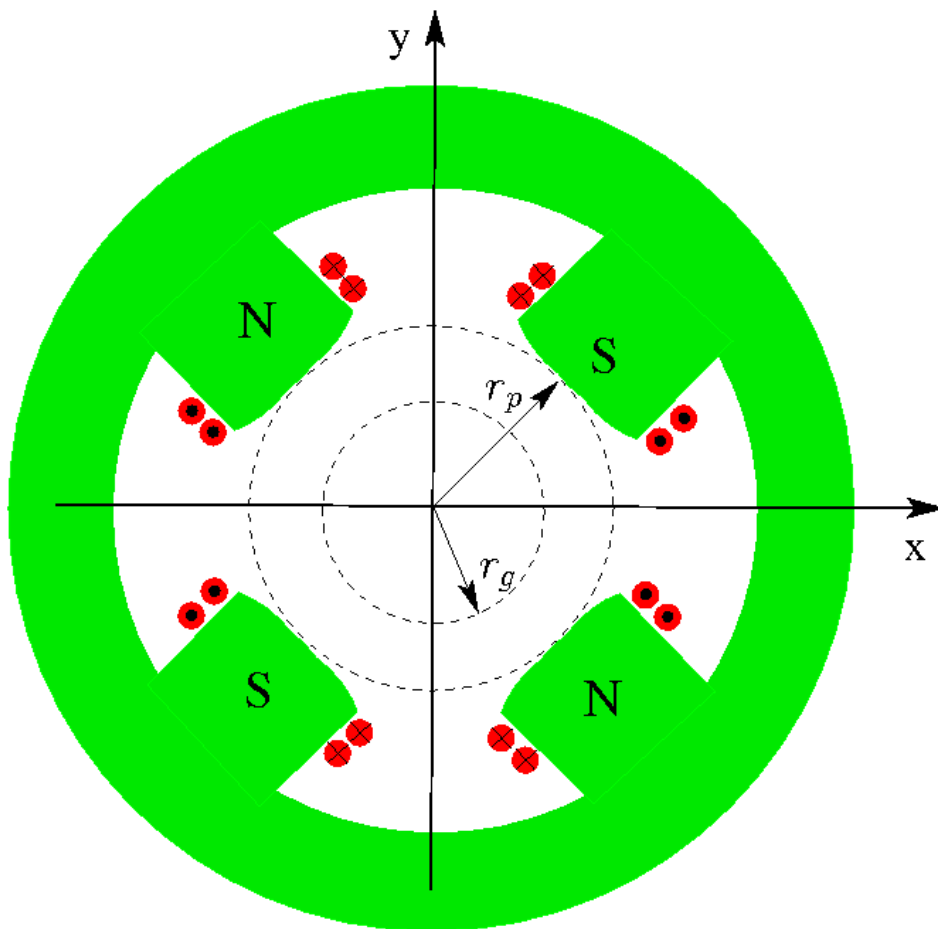

$r_p$  = Clear Bore Radius  
 $\sim$  Pole Radius Typical

$r_g$  = Good Field Radius  
 $\sim 70\% r_p$  Typical

## Comments:

- ◆ Particle orbits are designed to remain within radius  $r_g$
- ◆ Field error statements are readily generalized to 3D since:


$$\begin{aligned} \nabla \cdot \mathbf{B}^a &= 0 \\ \nabla \times \mathbf{B}^a &= 0 \end{aligned} \quad \Longrightarrow \quad \nabla^2 \mathbf{B}^a = 0$$

and therefore each component of  $\mathbf{B}^a$  satisfies a Laplace equation within the vacuum aperture. Therefore, field errors decrease when moving within a source-free region.


## S3F: Example Permanent Magnet Assemblies

A few examples of practical permanent magnet assemblies with field contours are provided to illustrate error field structures in practical devices


8-Rectangular Block Dipole

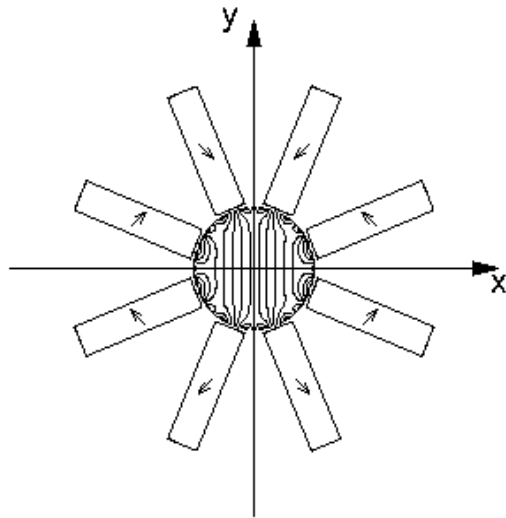


8-Square Block Quadrupole

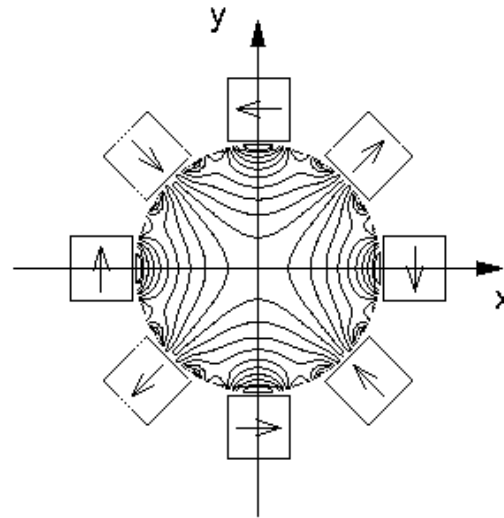

12-Rectangular Block Quadrupole

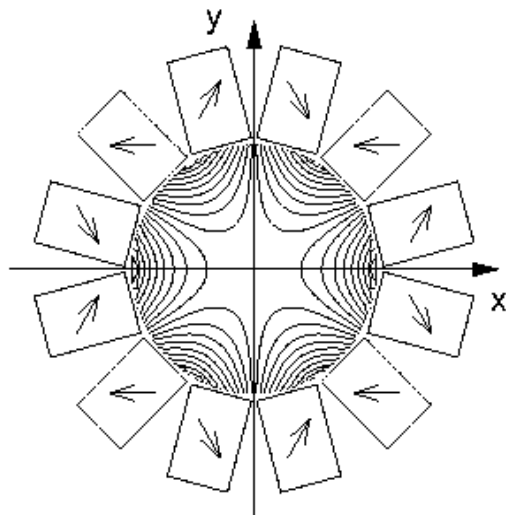

8-Rectangular Block Sextupole

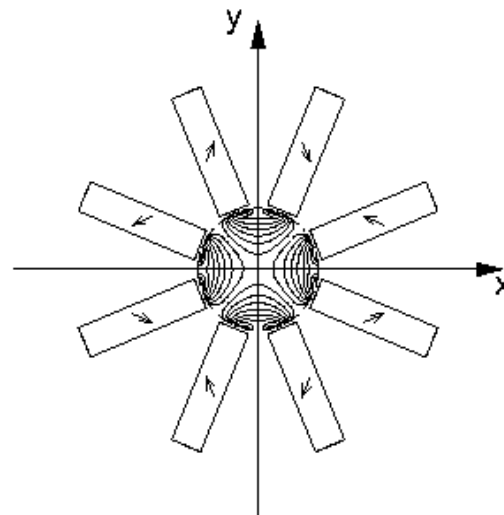

For more info on permanent magnet design see: Lund and Halbach, *Fusion Engineering Design*, **32-33**, 401-415 (1996)



## S4: Transverse Particle Equations of Motion with Nonlinear Applied Fields

### S4A: Overview

In **S1** we showed that the particle equations of motion can be expressed as:

$$\mathbf{x}''_{\perp} + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \mathbf{x}'_{\perp} = \frac{q}{m \gamma_b \beta_b^2 c^2} \mathbf{E}_{\perp}^a + \frac{q}{m \gamma_b \beta_b c} \hat{\mathbf{z}} \times \mathbf{B}_{\perp}^a + \frac{q B_z^a}{m \gamma_b \beta_b c} \mathbf{x}'_{\perp} \times \hat{\mathbf{z}} - \frac{q}{\gamma_b^3 \beta_b^2 c^2} \frac{\partial}{\partial \mathbf{x}_{\perp}} \phi$$

When momentum spread is neglected and results are interpreted in a Cartesian coordinate system (no bends). In **S2**, we showed that these equations can be further reduced when the applied focusing fields are **linear** to:

$$x'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} x' + \kappa_x(s)x = -\frac{q}{m \gamma_b^3 \beta_b^2 c^2} \frac{\partial}{\partial x} \phi$$

$$y'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} y' + \kappa_y(s)y = -\frac{q}{m \gamma_b^3 \beta_b^2 c^2} \frac{\partial}{\partial y} \phi$$

where

$\kappa_x(s)$  =  $x$ -focusing function of lattice

$\kappa_y(s)$  =  $y$ -focusing function of lattice

describe the linear applied focusing forces and the equations are implicitly analyzed in the rotating Larmor frame when  $B_z^a \neq 0$ .

Lattice designs attempt to **minimize nonlinear applied fields**. However, the 3D Maxwell equations show that there will *always* be some finite nonlinear applied fields for an applied focusing element with finite extent. Applied field nonlinearities also result from:

- ◆ Design idealizations
- ◆ Fabrication and material errors

The largest source of nonlinear terms will depend on the case analyzed.

**Nonlinear applied fields must be added back in the idealized model when it is appropriate to analyze their effects**

- ◆ Common problem to address when carrying out large-scale numerical simulations to design/analyze systems

There are two basic approaches to carry this out:

**Approach 1: Explicit 3D Formulation**

**Approach 2: Perturbations About Linear Applied Field Model**

We will now discuss each of these in turn

## S4B: Approach 1: Explicit 3D Formulation

This is the simplest. Just employ the full 3D equations of motion expressed in terms of the applied field components  $\mathbf{E}^a$ ,  $\mathbf{B}^a$  and avoid using the focusing functions  $\kappa_x$ ,  $\kappa_y$

### Comments:

- ♦ Most easy to apply in computer simulations where many effects are simultaneously included
  - Simplifies comparison to experiments when many details matter for high level agreement
- ♦ Simplifies simultaneous inclusion of transverse and longitudinal effects
  - Accelerating field  $E_z^a$  can be included to calculate changes in  $\beta_b$ ,  $\gamma_b$
  - Transverse and longitudinal dynamics cannot be fully decoupled in high level modeling – especially try when acceleration is strong in systems like injectors
- ♦ Can be applied with time based equations of motion (see: S1)
  - Helps avoid unit confusion and continuously adjusting complicated equations of motion to identify the axial coordinate  $s$  appropriately

## S4C: Approach 2: Perturbations About Linear Applied Field Model

Exploit the linearity of the Maxwell equations to take:

$$\begin{aligned}\mathbf{E}_{\perp}^a &= \mathbf{E}_{\perp}^a|_L + \delta\mathbf{E}_{\perp}^a \\ \mathbf{B}^a &= \mathbf{B}^a|_L + \delta\mathbf{B}^a\end{aligned}$$

where

$\mathbf{E}_{\perp}^a|_L, \mathbf{B}^a|_L$  are the linear field components  
incorporated in  $\kappa_x, \kappa_y$

to express the equations of motion as:

$$\begin{aligned}x'' + \frac{(\gamma_b\beta_b)'}{(\gamma_b\beta_b)}x' + \kappa_x x &= \frac{q}{m\gamma_b\beta_b^2c^2}\delta E_x^a - \frac{q}{m\gamma_b\beta_b c}\delta B_y^a + \frac{q}{m\gamma_b\beta_b c}\delta B_z^a y' \\ &\quad - \frac{q}{m\gamma_b^3\beta_b^2c^2}\frac{\partial\phi}{\partial x} \\ y'' + \frac{(\gamma_b\beta_b)'}{(\gamma_b\beta_b)}y' + \kappa_y y &= \frac{q}{m\gamma_b\beta_b^2c^2}\delta E_y^a + \frac{q}{m\gamma_b\beta_b c}\delta B_x^a - \frac{q}{m\gamma_b\beta_b c}\delta B_z^a x' \\ &\quad - \frac{q}{m\gamma_b^3\beta_b^2c^2}\frac{\partial\phi}{\partial y}\end{aligned}$$

This formulation can be most useful to understand the effect of deviations from the usual linear model where intuition is developed

### Comments:

- ◆ Best suited to non-solenoidal focusing
  - Simplified Larmor frame analysis for solenoidal focusing is only valid for axisymmetric potentials  $\phi = \phi(r)$  which may not hold in the presence of non-ideal perturbations.
  - Applied field perturbations  $\delta\mathbf{E}_\perp^a$ ,  $\delta\mathbf{B}^a$  would also need to be projected into the Larmor frame
- ◆ Applied field perturbations  $\delta\mathbf{E}_\perp^a$ ,  $\delta\mathbf{B}^a$  will not necessarily satisfy the 3D Maxwell Equations by themselves
  - Follows because the linear field components  $\mathbf{E}_\perp^a|_L$ ,  $\mathbf{B}^a|_L$  will not, in general, satisfy the 3D Maxwell equations by themselves

# S5: Linear Transverse Particle Equations of Motion without Space-Charge, Acceleration, and Momentum Spread

## S5A: Hill's Equation

Neglect:

- ◆ Space-charge effects:  $\partial\phi/\partial\mathbf{x} \simeq 0$
- ◆ Nonlinear applied focusing and bends:  $\mathbf{E}^a, \mathbf{B}^a$  have only linear focus terms
- ◆ Acceleration:  $\gamma_b\beta_b \simeq \text{const}$
- ◆ Momentum spread effects:  $v_{zi} \simeq \beta_b c$

Then the transverse particle equations of motion reduce to **Hill's Equation**:

$$x''(s) + \kappa(s)x(s) = 0$$

$x = \perp$  particle coordinate

(i.e.,  $x$  or  $y$  or possibly combinations of coordinates)

$s =$  Axial coordinate of reference particle


$$' = \frac{d}{ds}$$

$\kappa(s) =$  Lattice focusing function (linear fields)

For a **periodic lattice**:

$$\kappa(s + L_p) = \kappa(s)$$
$$L_p = \text{Lattice Period}$$

/// Example: Hard-Edge Periodic Focusing Function

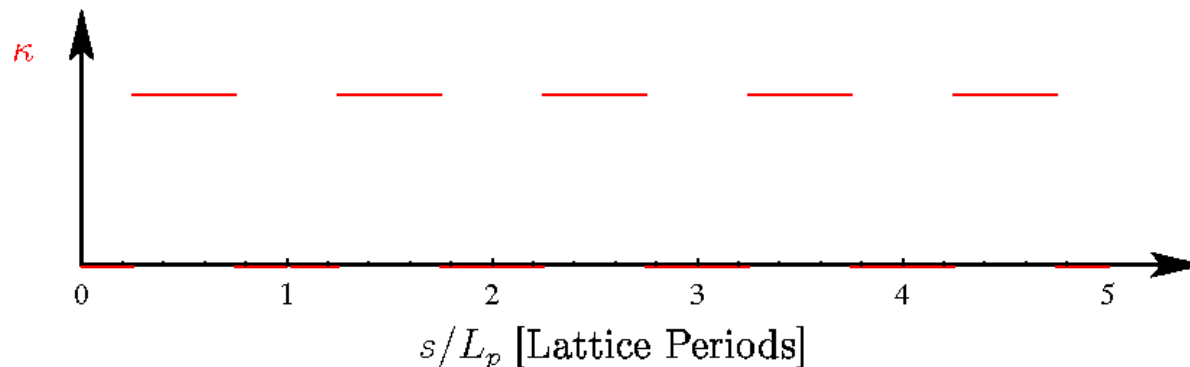


For a **ring** (i.e., circular accelerator), one also has the “superperiod” condition: ///

$$\kappa(s + \mathcal{C}) = \kappa(s)$$
$$\mathcal{C} = \mathcal{N}L_p = \text{Ring Circumfrance}$$
$$\mathcal{N} = \text{Superperiod Number}$$

- ◆ Distinction matters when there are (field) construction errors in the ring
  - Repeat with superperiod but not lattice period
  - See lectures on: **Particle Resonances**

/// Example: Period and Superperiod distinctions for errors in a ring

- \* Magnet with systematic defect will be felt every lattice period
- X Magnet with random (fabrication) defect felt once per lap

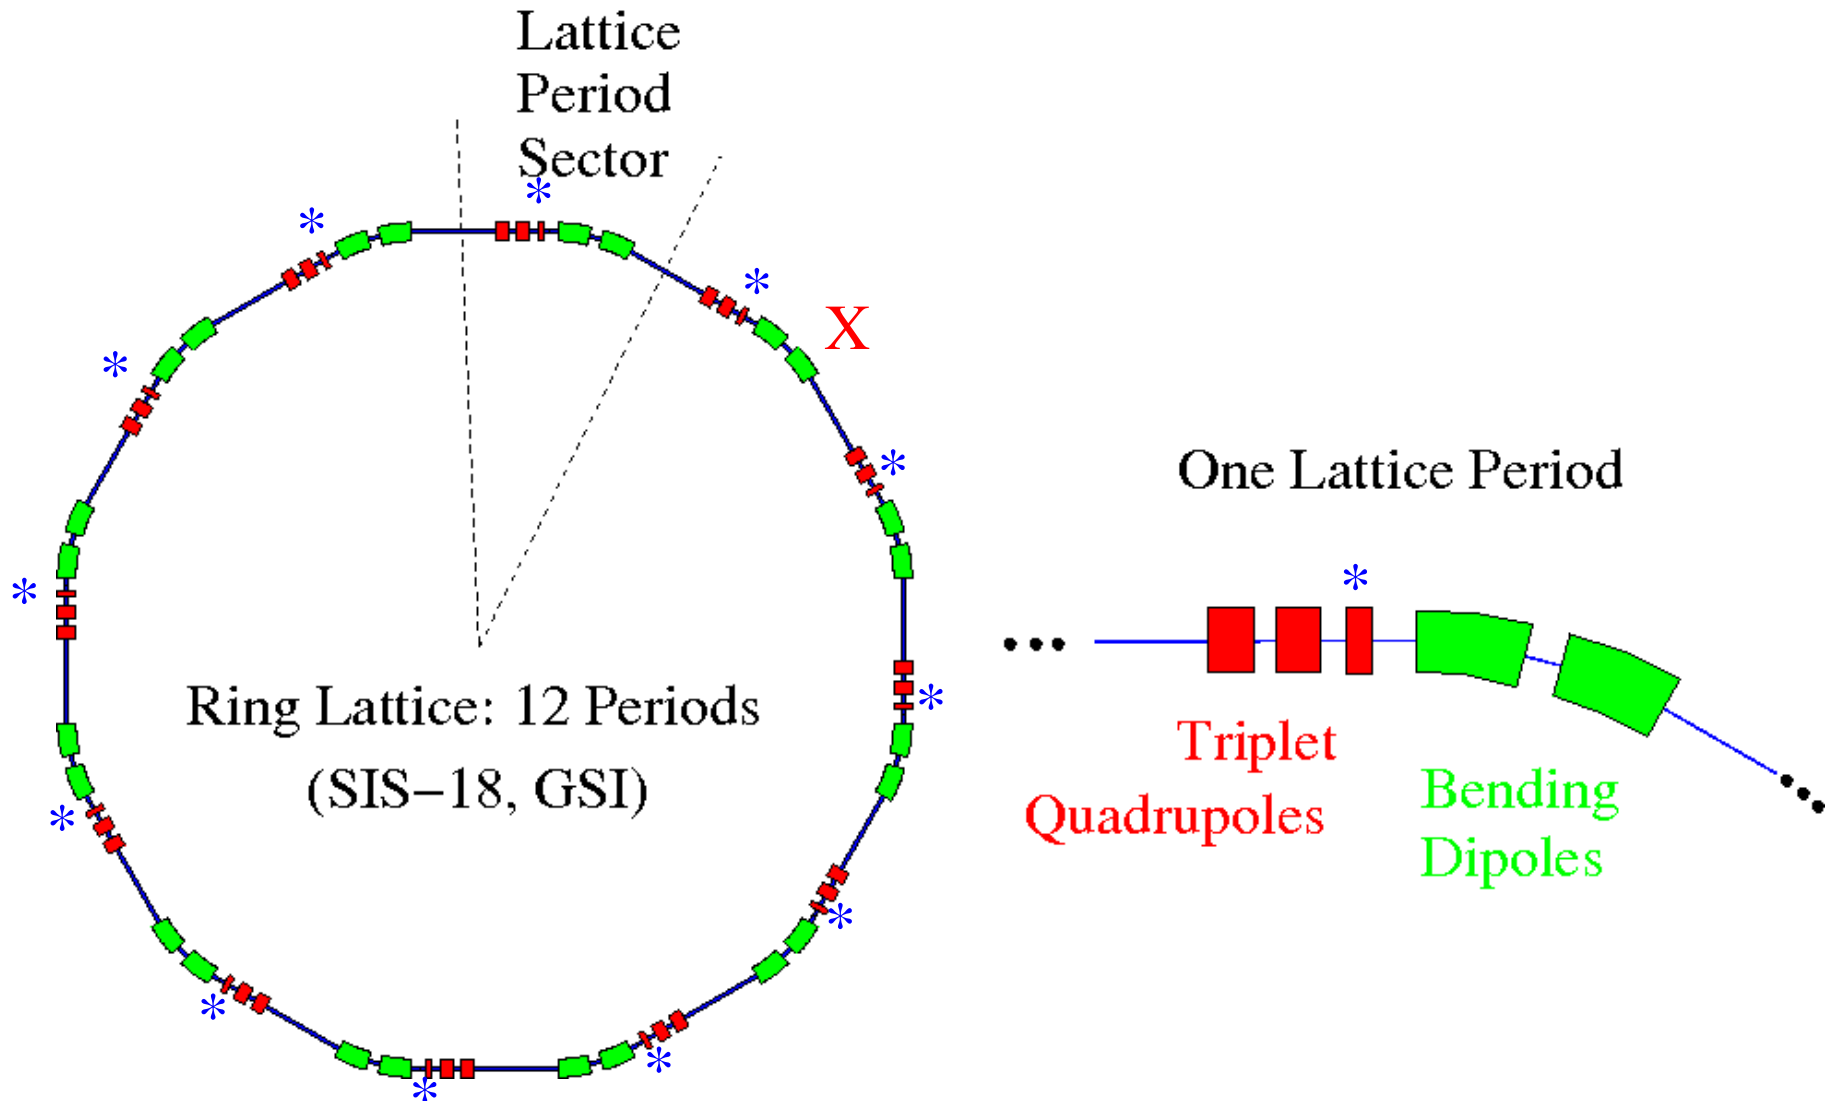



## S5B: Transfer Matrix Form of the Solution to Hill's Equation

Hill's equation is linear. The solution with **initial condition**:

$$\begin{aligned}x(s = s_i) &= x(s_i) \\x'(s = s_i) &= x'(s_i)\end{aligned}$$

$s = s_i =$  Axial location  
of initial condition

can be uniquely expressed in matrix form ( $\mathbf{M}$  is the **transfer matrix**) as:

$$\begin{aligned}\begin{bmatrix} x(s) \\ x'(s) \end{bmatrix} &= \mathbf{M}(s|s_i) \cdot \begin{bmatrix} x(s_i) \\ x'(s_i) \end{bmatrix} \\ &= \begin{bmatrix} C(s|s_i) & S(s|s_i) \\ C'(s|s_i) & S'(s|s_i) \end{bmatrix} \cdot \begin{bmatrix} x(s_i) \\ x'(s_i) \end{bmatrix}\end{aligned}$$

Where  $C(s|s_i)$  and  $S(s|s_i)$  are “cosine-like” and “sine-like” **principal trajectories** satisfying:

$$\begin{aligned}C''(s|s_i) + \kappa(s)C(s|s_i) &= 0 & C(s_i|s_i) &= 1 & C'(s_i|s_i) &= 0 \\S''(s|s_i) + \kappa(s)S(s|s_i) &= 0 & S(s_i|s_i) &= 0 & S'(s_i|s_i) &= 1\end{aligned}$$

**Transfer** matrices will be worked out in the problems for a few simple focusing systems discussed in **S2** with the additional assumption of piecewise constant  $\kappa(s)$

1) **Drift:**  $\kappa = 0$

$$\mathbf{M}(s|s_i) = \begin{bmatrix} 1 & s - s_i \\ 0 & 1 \end{bmatrix}$$

2) **Continuous Focusing:**  $\kappa = k_{\beta 0}^2 = \text{const} > 0$

$$\mathbf{M}(s|s_i) = \begin{bmatrix} \cos[k_{\beta 0}(s - s_i)] & \frac{1}{k_{\beta 0}} \sin[k_{\beta 0}(s - s_i)] \\ -k_{\beta 0} \sin[k_{\beta 0}(s - s_i)] & \cos[k_{\beta 0}(s - s_i)] \end{bmatrix}$$

3) **Solenoidal Focusing:**  $\kappa = \hat{\kappa} = \text{const} > 0$

Results are expressed within the rotating **Larmor Frame**

(same as continuous focusing with reinterpretation of variables)

$$\mathbf{M}(s|s_i) = \begin{bmatrix} \cos[\sqrt{\hat{\kappa}}(s - s_i)] & \frac{1}{\sqrt{\hat{\kappa}}} \sin[\sqrt{\hat{\kappa}}(s - s_i)] \\ -\sqrt{\hat{\kappa}} \sin[\sqrt{\hat{\kappa}}(s - s_i)] & \cos[\sqrt{\hat{\kappa}}(s - s_i)] \end{bmatrix}$$

4) **Quadrupole Focusing-Plane:**  $\kappa = \hat{\kappa} = \text{const} > 0$

(Obtain from continuous focusing case)

$$\mathbf{M}(s|s_i) = \begin{bmatrix} \cos[\sqrt{\hat{\kappa}}(s - s_i)] & \frac{1}{\sqrt{\hat{\kappa}}} \sin[\sqrt{\hat{\kappa}}(s - s_i)] \\ -\sqrt{\hat{\kappa}} \sin[\sqrt{\hat{\kappa}}(s - s_i)] & \cos[\sqrt{\hat{\kappa}}(s - s_i)] \end{bmatrix}$$

5) **Quadrupole DeFocusing-Plane:**  $\kappa = -\hat{\kappa} = \text{const} < 0$

(Obtain from quadrupole focusing case with  $\hat{\kappa} \rightarrow i\hat{\kappa}$   $i = \sqrt{-1}$  )

$$\mathbf{M}(s|s_i) = \begin{bmatrix} \cosh[\sqrt{\hat{\kappa}}(s - s_i)] & \frac{1}{\sqrt{\hat{\kappa}}} \sinh[\sqrt{\hat{\kappa}}(s - s_i)] \\ \sqrt{\hat{\kappa}} \sinh[\sqrt{\hat{\kappa}}(s - s_i)] & \cosh[\sqrt{\hat{\kappa}}(s - s_i)] \end{bmatrix}$$

6) **Thin Lens:**  $\kappa(s) = \frac{1}{f} \delta(s - s_0)$

$s_0 = \text{const} = \text{Axial Location Lens}$

$f = \text{const} = \text{Focal Length}$

$\delta(x) = \text{Dirac-Delta Function}$

$$\mathbf{M}(s_0^+ | s_0^-) = \begin{bmatrix} 1 & 0 \\ -\frac{1}{f} & 1 \end{bmatrix}$$

## S5C: Wronskian Symmetry of Hill's Equation

An important property of this linear motion is a **Wronskian invariant/symmetry**:

$$\begin{aligned} W(s|s_i) &\equiv \det \mathbf{M}(s|s_i) = \det \begin{bmatrix} C(s|s_i) & S(s|s_i) \\ C'(s|s_i) & S'(s|s_i) \end{bmatrix} \\ &= C(s|s_i)S'(s|s_i) - C'(s|s_i)S(s|s_i) = 1 \end{aligned}$$

/// Proof: Abbreviate Notation  $C \equiv C(s|s_i)$  etc.

Multiply Equations of Motion for  $C$  and  $S$  by  $-S$  and  $C$ , respectively:

$$-S(C'' + \kappa C) = 0$$

$$+C(S'' + \kappa S) = 0$$

Add Equations:

$$CS'' - SC'' + \kappa(CS - SC) = 0$$

$$\implies \frac{dW}{ds} = 0 \quad \implies W = \text{const}$$

Apply initial conditions:

$$W(s) = W(s_i) = C_i S'_i - C'_i S_i = 1 \cdot 1 - 0 \cdot 0 = 1$$

///

### /// Example: Continuous Focusing: Transfer Matrix and Wronskian

$$\kappa(s) = k_{\beta 0}^2 = \text{const} > 0$$

Principal orbit equations are simple harmonic oscillators with solution:

$$\begin{aligned} C(s|s_i) &= \cos[k_{\beta 0}(s - s_i)] & C'(s|s_i) &= -k_{\beta 0} \sin[k_{\beta 0}(s - s_i)] \\ S(s|s_i) &= \frac{\sin[k_{\beta 0}(s - s_i)]}{k_{\beta 0}} & S'(s|s_i) &= \cos[k_{\beta 0}(s - s_i)] \end{aligned}$$

Transfer matrix gives the familiar solution:

$$\begin{bmatrix} x(s) \\ x'(s) \end{bmatrix} = \begin{bmatrix} \cos[k_{\beta 0}(s - s_i)] & \frac{\sin[k_{\beta 0}(s - s_i)]}{k_{\beta 0}} \\ -k_{\beta 0} \sin[k_{\beta 0}(s - s_i)] & \cos[k_{\beta 0}(s - s_i)] \end{bmatrix} \cdot \begin{bmatrix} x(s_i) \\ x'(s_i) \end{bmatrix}$$

Wronskian invariant is elementary:

$$W = \cos^2[k_{\beta 0}(s - s_i)] + \sin^2[k_{\beta 0}(s - s_i)] = 1$$

///

## S5D: Stability of Solutions to Hill's Equation in a Periodic Lattice

The transfer matrix must be the same in any period of the lattice:

$$\mathbf{M}(s + L_p | s_i + L_p) = \mathbf{M}(s | s_i)$$

For a propagation distance  $s - s_i$  satisfying

$$NL_p \leq s - s_i \leq (N + 1)L_p \quad N = 0, 1, 2, \dots$$

the transfer matrix can be resolved as



$$\begin{aligned} \mathbf{M}(s | s_i) &= \mathbf{M}(s - NL_p | s_i) \cdot \mathbf{M}(s_i + NL_p | s_i) \\ &= \mathbf{M}(s - NL_p | s_i) \cdot [\mathbf{M}(s_i + L_p | s_i)]^N \\ &\quad \text{Residual} \qquad \qquad \qquad N \text{ Full Periods} \end{aligned}$$

For a lattice to have **stable orbits**, both  $x(s)$  and  $x'(s)$  should **remain bounded** on propagation through an arbitrary number  $N$  of lattice periods. This is equivalent to requiring that the **elements of  $\mathbf{M}$  remain bounded** on propagation through any number of lattice periods:

$$\mathbf{M}^N \equiv [\mathbf{M}^N_{ij}]$$

$$\lim_{N \rightarrow \infty} \left| \mathbf{M}^N_{ij} \right| < \infty \quad \implies \text{Stable Motion}$$

## Clarification of stability notion: Unstable Orbit

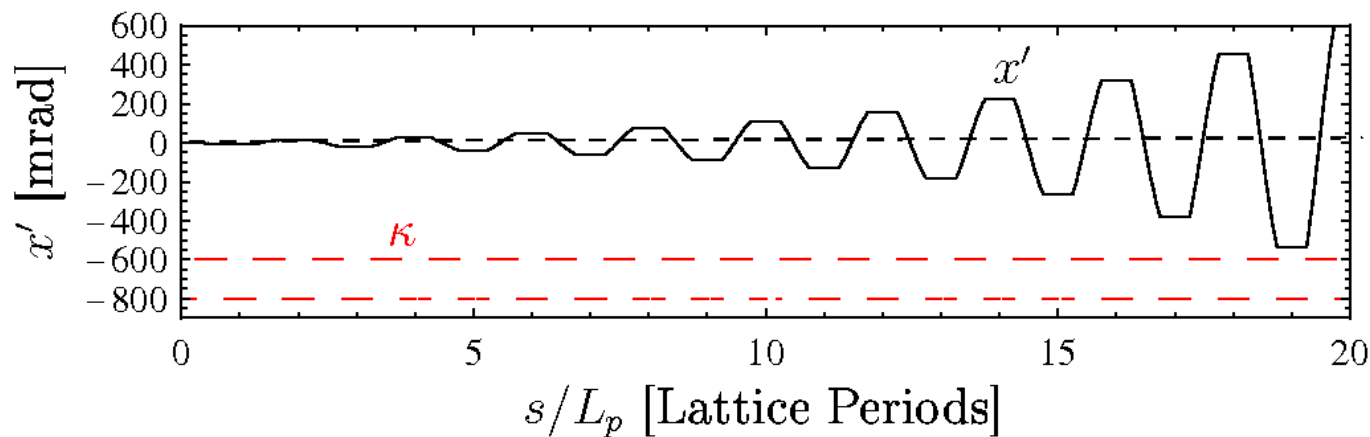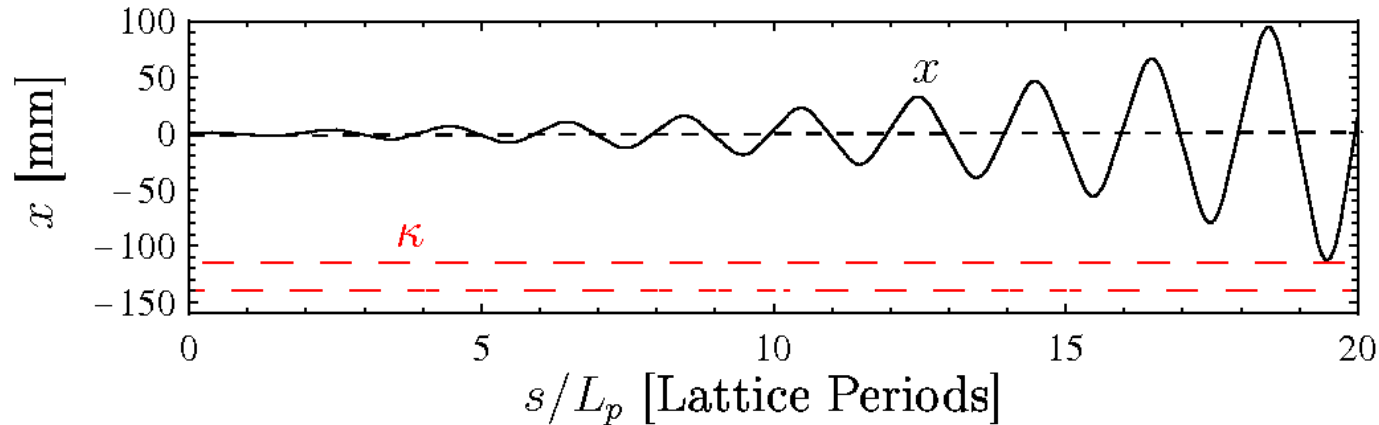

$$L_p = 0.5 \text{ m}$$

$$\eta = 0.5$$

$$\kappa =$$

$$\begin{cases} 48 & \text{where } \kappa \neq 0 \\ 0 & \text{otherwise} \end{cases}$$

$$x(0) = 1 \text{ mm}$$

$$x'(0) = 0$$

For energetic particle:  $H = \frac{1}{2}x'^2 + \frac{1}{2}\kappa x^2 \sim \text{Large, but } \neq \text{const}$

where  $|x'|$  small,  $|x|$  large

where  $|x|$  small,  $|x'|$  large

The matrix criterion corresponds to our intuitive notion of stability: as the particle advances there are no large oscillation excursions in position and angle.

To analyze the **stability condition**, examine the **eigenvectors/eigenvalues** of **M** for transport through one lattice period:

$$\mathbf{M}(s_i + L_p | s_i) \cdot \mathbf{E} \equiv \lambda \mathbf{E}$$

$\mathbf{E}$  = Eigenvector

$\lambda$  = Eigenvalue

- ◆ Eigenvectors and Eigenvalues are generally complex
- ◆ Eigenvectors and Eigenvalues generally vary with  $s_i$
- ◆ Two independent Eigenvalues and Eigenvectors
  - Degeneracies special case

Derive the two independent eigenvectors/eigenvalues through analysis of the **characteristic equation**: Abbreviate Notation

$$\mathbf{M}(s_i + L_p | s_i) = \begin{bmatrix} C(s_i + L_p | s_i) & S(s_i + L_p | s_i) \\ C'(s_i + L_p | s_i) & S'(s_i + L_p | s_i) \end{bmatrix} \equiv \begin{bmatrix} C & S \\ C' & S' \end{bmatrix}$$

Nontrivial solutions exist when:

$$\det \begin{bmatrix} C - \lambda & S \\ C' & S' - \lambda \end{bmatrix} = \lambda^2 + (C + S')\lambda + (CS' - SC') = 0$$



But we can apply the **Wronskian** condition:

$$CS' - SC' = 1$$

and we make the notational definition

$$C + S' = \text{Tr } \mathbf{M} \equiv 2 \cos \sigma_0$$

The **characteristic equation** then reduces to:

$$\lambda^2 - 2\lambda \cos \sigma_0 + 1 = 0 \quad \cos \sigma_0 \equiv \frac{1}{2} \text{Tr } \mathbf{M}(s_i + L_p | s_i)$$

- ◆ The use of  $2 \cos \sigma_0$  to denote  $\text{Tr } \mathbf{M}$  is in anticipation of later results (see **S6**) where  $\sigma_0$  is identified as the phase-advance of a stable orbit

There are two solutions to the characteristic equation that we denote  $\lambda_{\pm}$

$$\lambda_{\pm} = \cos \sigma_0 \pm \sqrt{\cos^2 \sigma_0 - 1} = \cos \sigma_0 \pm i \sin \sigma_0 = e^{\pm i \sigma_0}$$

$$\mathbf{E}_{\pm} = \text{Corresponding Eigenvectors} \quad i \equiv \sqrt{-1}$$

- ◆ Note that:  $\lambda_+ \lambda_- = 1$   
 $\lambda_+ = 1/\lambda_-$

Consider a vector of **initial conditions**:

$$\begin{bmatrix} x(s_i) \\ x'(s_i) \end{bmatrix} = \begin{bmatrix} x_i \\ x'_i \end{bmatrix}$$

The eigenvectors  $\mathbf{E}_{\pm}$  span two-dimensional space. So any initial condition vector can be expanded as:

$$\begin{bmatrix} x_i \\ x'_i \end{bmatrix} = \alpha_+ \mathbf{E}_+ + \alpha_- \mathbf{E}_-$$

$\alpha_{\pm} = \text{Complex Constants}$

Then using  $\mathbf{M}\mathbf{E}_{\pm} = \lambda_{\pm}\mathbf{E}_{\pm}$

$$\mathbf{M}^N(s_i + L_p | s_i) \begin{bmatrix} x_i \\ x'_i \end{bmatrix} = \alpha_+ \lambda_+^N \mathbf{E}_+ + \alpha_- \lambda_-^N \mathbf{E}_-$$

Therefore, if  $\lim_{N \rightarrow \infty} \lambda^N$  is bounded, then the motion is **stable**. This will always be the case if  $|\lambda_{\pm}| \leq 1$ , corresponding to  $\sigma_0$  real with  $|\cos \sigma_0| \leq 1$

This implies **for stability** or the orbit that we must have:

$$\begin{aligned} \frac{1}{2} |\text{Trace } \mathbf{M}(s_i + L_p | s_i)| &= \frac{1}{2} |C(s_i + L_p | s_i) + S'(s_i + L_p | s_i)| \\ &= |\cos \sigma_0| \leq 1 \end{aligned}$$

In a periodic focusing lattice, this important **stability condition** places restrictions on the lattice structure (focusing strength) that are generally interpreted in terms of **phase advance limits** (see: **S6**).

- ◆ Accelerator lattices almost always tuned for single particle stability to maintain beam control
  - Even for intense beams, beam centroid approximately obeys single particle equations of motion when image charges are negligible
- ◆ Space-charge and nonlinear applied fields can further limit particle stability
  - Resonances: see: **Particle Resonances ....**
  - Envelope Instability: see: **Transverse Centroid and Envelope ....**
  - Higher Order Instability: see: **Transverse Kinetic Stability**
- ◆ We will show (see: **S6**) that for stable orbits  $\sigma_0$  can be interpreted as the phase-advance of single particle oscillations

### /// Example: Continuous Focusing Stability

$$\kappa(s) = k_{\beta 0}^2 = \text{const} > 0$$

Principal orbit equations are simple harmonic oscillators with solution:

$$\begin{aligned} C(s|s_i) &= \cos[k_{\beta 0}(s - s_i)] & C'(s|s_i) &= -k_{\beta 0} \sin[k_{\beta 0}(s - s_i)] \\ S(s|s_i) &= \frac{\sin[k_{\beta 0}(s - s_i)]}{k_{\beta 0}} & S'(s|s_i) &= \cos[k_{\beta 0}(s - s_i)] \end{aligned}$$

Stability bound then gives:

$$\begin{aligned} \frac{1}{2} |\text{Trace } \mathbf{M}(s_i + L_p|s_i)| &= \frac{1}{2} |C(s_i + L_p|s_i) + S'(s_i + L_p|s_i)| \\ &= |\cos(k_{\beta 0}(s - s_i))| \leq 1 \end{aligned}$$

- ◆ Always satisfied for real  $k_{\beta 0}$
- ◆ Confirms known result using formalism: continuous focusing stable
  - Energy not pumped into or out of particle orbit

///


The simplest example of the stability criterion applied to periodic lattices will be given in the problem sets: **Stability of a periodic thin lens lattice**

- ◆ Analytically find that lattice unstable when focusing kicks sufficiently strong

## More advanced treatments

◆ See: Dragt, *Lectures on Nonlinear Orbit Dynamics*, AIP Conf Proc 87 (1982) show that **symplectic 2x2 transfer matrices** associated with **Hill's Equation** have only **two possible classes of eigenvalue symmetries**:

### 1) Stable

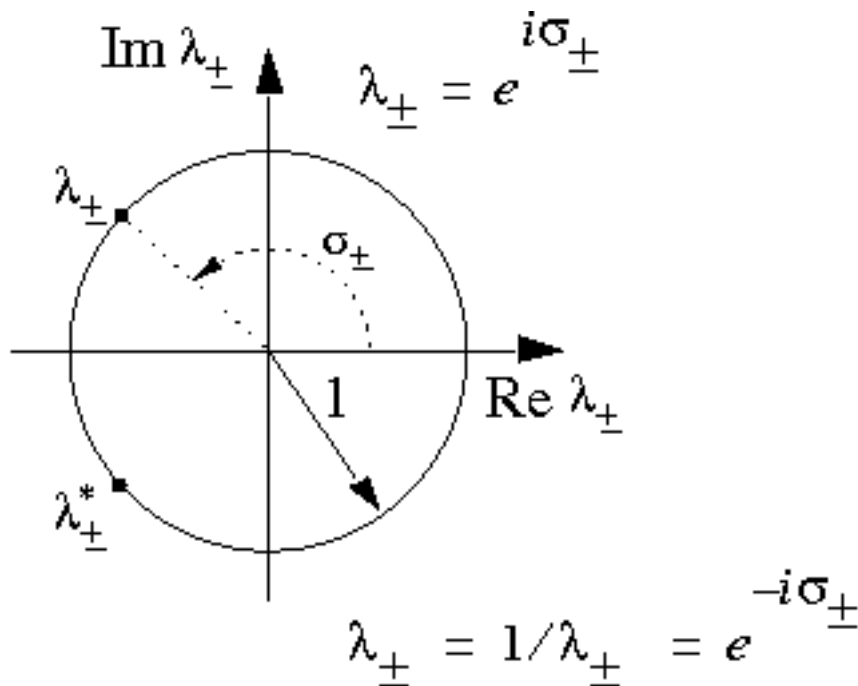


Occurs for:

$$0 \leq \sigma_0 \leq 180^\circ/\text{period}$$

◆ Limited class of possibilities simplifies analysis of focusing lattices

### 2) Unstable, Lattice Resonance

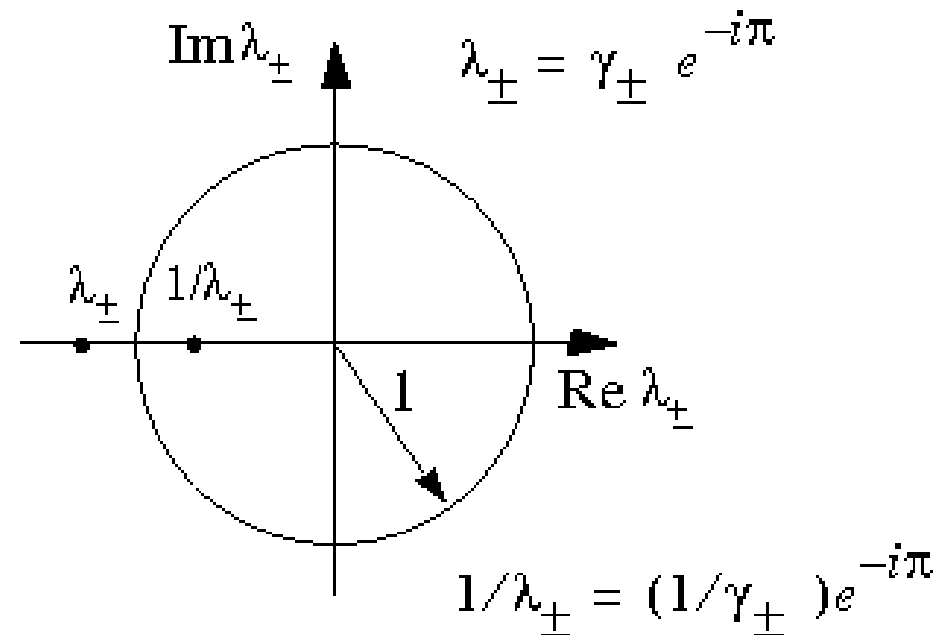

Occurs in bands when focusing strength is increased beyond

$$\sigma_0 = 180^\circ/\text{period}$$

# S6: Hill's Equation: Floquet's Theorem and the Phase-Amplitude Form of the Particle Orbit

## S6A: Introduction

In this section we consider **Hill's Equation**:

$$x''(s) + \kappa(s)x(s) = 0$$

subject to a **periodic** applied focusing function

$$\kappa(s + L_p) = \kappa(s)$$

$$L_p = \text{Lattice Period}$$

- ◆ Many results will also hold in more complicated form for a non-periodic  $\kappa(s)$

## S6B: Floquet's Theorem

Floquet's Theorem (proof: see standard Mathematics and Mathematical Physics Texts)

The solution to Hill's Equation  $x(s)$  has two linearly independent solutions that can be expressed as:

$$x_1(s) = w(s)e^{i\mu s}$$

$$x_2(s) = w(s)e^{-i\mu s}$$

$$i = \sqrt{-1}$$

$$\mu = \frac{1}{2} \text{Tr } \mathbf{M}(s_i + L_p | s_i) = \cos \sigma_0$$

$$= \text{const} = \text{Characteristic Exponent}$$

Where  $w(s)$  is a **periodic** function:

$$w(s + L_p) = w(s)$$

- ◆ Theorem as written only applies for  $\mathbf{M}$  with non-degenerate eigenvalues. But a similar theorem applies in the degenerate case.
- ◆ A similar theorem is also valid for non-periodic focusing functions

## S6C: Phase-Amplitude Form of Particle Orbit

As a consequence of [Floquet's Theorem](#), any (stable or unstable) nondegenerate solution to [Hill's Equation](#) can be expressed in [phase-amplitude](#) form as:

$$\begin{aligned}x(s) &= A(s) \cos \psi(s) & A(s) &= \text{Amplitude Function} \\A(s + L_p) &= A(s) & \psi(s) &= \text{Phase Function}\end{aligned}$$

Derive equations of motion for  $A$ ,  $\psi$  by taking derivatives of the phase-amplitude form for  $x(s)$ :

$$x = A \cos \psi$$

$$x' = A' \cos \psi - A\psi' \sin \psi$$

$$x'' = A'' \cos \psi - A'\psi' \sin \psi - A\psi'' \sin \psi - A\psi'^2 \cos \psi$$

then substitute in [Hill's Equation](#):

$$x'' + \kappa x = [A'' + \kappa A - A\psi'^2] \cos \psi - [2A'\psi' + A\psi''] \sin \psi = 0$$



$$x'' + \kappa x = [A'' + \kappa A - A\psi'^2] \cos \psi - [2A'\psi' + A\psi''] \sin \psi = 0$$

We are free to introduce an additional constraint between  $A$  and  $\psi$  :

- Two functions  $A$ ,  $\psi$  to represent one function  $x$  allows a constraint

Choose:

Eq. (1)  $2A'\psi' + A\psi'' = 0 \implies$  Coefficient of  $\sin \psi$  zero

Then to satisfy Hill's Equation for all  $\psi$  the, coefficient of  $\cos \psi$  must also vanish giving:

Eq. (2)  $A'' + \kappa A - A\psi'^2 = 0 \implies$  Coefficient of  $\cos \psi$  zero

Eq. (1) Analysis (coefficient of  $\sin \psi$ ):  $2A'\psi' + A\psi'' = 0$

Simplify:

$$2A'\psi' + A\psi'' = \frac{(A^2\psi')'}{A} = 0 \quad A \neq 0$$

Will show later that this assumption met for all  $s$

$$\implies (A^2\psi')' = 0$$

Integrate once:

$$A^2\psi' = \text{const}$$

One commonly **rescales** the amplitude  $A(s)$  in terms of an auxiliary amplitude functions  $w(s)$ :

$$A(s) = A_i w(s) \quad A_i = \text{const} = \text{Initial Amplitude}$$

such that

$$w^2\psi' \equiv 1$$

This equation can then be integrated to obtain the **phase-function** of the particle:

$$\psi(s) = \psi_i + \int_{s_i}^s \frac{d\tilde{s}}{w^2(\tilde{s})} \quad \psi_i = \text{const} = \text{Initial Phase}$$

Eq. (2) Analysis (coefficient of  $\cos \psi$ ):  $A'' + \kappa A - A\psi'^2 = 0$

With the choice of amplitude rescaling,  $w^2\psi' = 1$  and Eq. (2) becomes:

$$w'' + \kappa w - \frac{1}{w^3} = 0$$

Floquet's theorem tells us that we are free to restrict  $w$  to be a periodic solution:

$$w(s + L_p) = w(s)$$

Reduced Expressions for  $x$  and  $x'$ :

Using  $A = A_i w$  and  $w^2\psi' = 1$ :

$$x = A \cos \psi$$

$$x' = A' \cos \psi - A\psi' \sin \psi$$

$\implies$

$$x = A_i w \cos \psi$$
$$x' = A_i w' \cos \psi - \frac{A_i}{w} \sin \psi$$

## S6D: Summary: Phase-Amplitude Form of Solution to Hill's Eqn

$$x(s) = A_i w(s) \cos \psi(s)$$

$$A_i = \text{const} = \text{Initial Amplitude}$$

$$x'(s) = A_i w'(s) \cos \psi(s) - \frac{A_i}{w(s)} \sin \psi(s)$$

$$\psi_i = \text{const} = \text{Initial Phase}$$

where  $w(s)$  and  $\psi(s)$  are **amplitude-** and **phase-functions** satisfying:

### Amplitude Equations

$$w''(s) + \kappa(s)w(s) - \frac{1}{w^3(s)} = 0$$

$$w(s + L_p) = w(s)$$

$$w(s) > 0$$

### Phase Equations

$$\psi'(s) = \frac{1}{w^2(s)}$$

$$\psi(s) = \psi_i + \int_{s_i}^s \frac{d\tilde{s}}{w^2(\tilde{s})}$$

$$\psi(s) = \psi_i + \Delta\psi(s)$$

Initial (  $s = s_i$  ) amplitudes are constrained by the particle initial conditions as:

$$x(s = s_i) = A_i w_i \cos \psi_i$$

or

$$x'(s = s_i) = A_i w'_i \cos \psi_i - \frac{A_i}{w_i} \sin \psi_i$$

$$A_i \cos \psi_i = x(s = s_i) / w_i$$

$$w_i \equiv w(s = s_i)$$

$$A_i \sin \psi_i = x(s = s_i) w'_i - x'(s = s_i) w_i$$

$$w'_i \equiv w'(s = s_i)$$

## S6E: Points on the Phase-Amplitude Formulation

1)  $w(s)$  can be taken as **positive definite**

$$w(s) > 0$$

/// **Proof:** Sign choices in  $w$ :

Let  $w(s)$  be positive at some point. Then the equation:

$$w'' + \kappa w - \frac{1}{w^3} = 0$$

Insures that  $w$  can never vanish or change sign. This follows because whenever  $w$  becomes small,  $w'' \simeq 1/w^3 \gg 0$  can become arbitrarily large to turn  $w$  before it reaches zero. Thus, to fix phases, we conveniently require that  $w > 0$ . ///

- ◆ Proof verifies assumption made in analysis that  $A = A_i w \neq 0$
- ◆ Conversely, one could choose  $w$  negative and it would always remain negative for analogous reasons. This choice is *not* commonly made.
- ◆ Sign choice removes ambiguity in relating initial conditions  $x(s_i)$ ,  $x'(s_i)$  to  $A_i$ ,  $\psi_i$

## 2) $w(s)$ is a **unique periodic function**

- ◆ Can be proved using a connection between  $w$  and the principal orbit functions  $C$  and  $S$  (see: **Appendix C** and **S7**)
- ◆  $w(s)$  can be regarded as a special, periodic function describing the lattice

## 3) The **amplitude parameters**

$$w_i = w(s = s_i)$$

$$w'_i = w'(s_i)$$

depend *only* on the periodic lattice properties and are *independent* of the particle initial conditions  $x(s_i)$ ,  $x'(s_i)$

## 4) The **phase-advance**

$$\Delta\psi(s) = \int_{s_i}^s \frac{d\tilde{s}}{w^2(\tilde{s})}$$

depends on the choice of initial condition  $s_i$ . However, the phase-advance through one lattice period

$$\Delta\psi(s_i + L_p) = \int_{s_i}^{s_i + L_p} \frac{d\tilde{s}}{w^2(\tilde{s})}$$

Will be independent of  $s_i$  since  $w$  is a periodic function with period  $L_p$

- ◆ Will show that (see later in this section)

$$\Delta\psi(s_i + L_p) \equiv \sigma_0$$

is the undepressed phase advance of particle oscillations

5)  $w(s)$  has dimensions  $[[w]] = \text{Sqrt}[\text{meters}]$

- ◆ Can prove inconvenient in applications and motivates the use of an alternative “betatron” function  $\beta$

with  $\beta(s) \equiv w^2(s) = \text{meters}$  (see: **S7** and **S8**)

6) On the surface, what we have done: Transform the **linear Hill's Equation** to a form where a solution to **nonlinear axillary equations** for  $w$  and  $\beta$  are needed via the **phase-amplitude method** seems insane ..... **why do it?**

- ◆ Method will help identify the useful Courant-Snyder invariant which will aid interpretation of the dynamics (see: **S7**)
- ◆ Decoupling of initial conditions in the phase-amplitude method will help simplify understanding of bundles of particles in the distribution

## S6F: Relation between Principal Orbit Functions and Phase-Amplitude Form Orbit Functions

The **transfer matrix**  $\mathbf{M}$  of the particle orbit can be expressed in terms of the principal orbit functions  $C$  and  $S$  as (see: **S4**):

$$\begin{bmatrix} x(s) \\ x'(s) \end{bmatrix} = \mathbf{M}(s|s_i) \cdot \begin{bmatrix} x(s_i) \\ x'(s_i) \end{bmatrix} = \begin{bmatrix} C(s|s_i) & S(s|s_i) \\ C'(s|s_i) & S'(s|s_i) \end{bmatrix} \cdot \begin{bmatrix} x(s_i) \\ x'(s_i) \end{bmatrix}$$

Use of the **phase-amplitude forms** and some algebra identifies (see problem sets):

$$\begin{aligned} C(s|s_i) &= \frac{w(s)}{w_i} \cos \Delta\psi(s) - w'_i w(s) \sin \Delta\psi(s) \\ S(s|s_i) &= w_i w(s) \sin \Delta\psi(s) \\ C'(s|s_i) &= \left( \frac{w'(s)}{w_i} - \frac{w'_i}{w(s)} \right) \cos \Delta\psi(s) - \left( \frac{1}{w_i w(s)} + w'_i w'(s) \right) \sin \Delta\psi(s) \\ S'(s|s_i) &= \frac{w_i}{w(s)} \cos \Delta\psi(s) + w_i w'(s) \sin \Delta\psi(s) \\ \Delta\psi(s) &\equiv \int_{s_i}^s \frac{d\tilde{s}}{w^2(\tilde{s})} \qquad w_i \equiv w(s = s_i) \\ &\qquad\qquad\qquad w'_i \equiv w'(s = s_i) \end{aligned}$$



/// **Aside:** Alternatively, it can be shown (see: **Appendix C**) that  $w(s)$  can be related to the principal orbit functions calculated over one Lattice period by:

$$w^2(s) = \beta(s) = \sin \sigma_0 \frac{S(s|s_i)}{S(s_i + L_p|s_i)} + \frac{S(s_i + L_p|s_i)}{\sin \sigma_0} \left[ C(s|s_i) + \frac{\cos \sigma_0 - C(s|s_i)}{S(s_i + L_p|s_i)} S(s|s_i) \right]^2$$

$$\sigma_0 \equiv \int_{s_i}^s \frac{d\tilde{s}}{w^2(\tilde{s})}$$

The formula for  $\sigma_0$  in terms of principal orbit functions is useful:

- ◆  $\sigma_0$  (phase advance, see: **S6G**) is often specified for the lattice and the focusing function  $\kappa(s)$  is tuned to achieve the specified value
- ◆ Shows that  $w(s)$  can be constructed from two principal orbit integrations over one lattice period
  - Integrations must generally be done numerically for  $C$  and  $S$
  - No root finding required for initial conditions to construct periodic  $w(s)$
  - $s_i$  can be anywhere in the lattice period and  $w(s)$  will be independent of the specific choice of  $s_i$

- ♦ The form of  $w^2(s)$  suggests an underlying **Courant-Snyder Invariant** (see: **S7** and **Appendix C**)
- ♦  $w^2 = \beta$  can be applied to calculate max beam particle excursions in the absence of space-charge effects (see: **S8**)
  - Useful in machine design
  - Exploits **Courant-Snyder Invariant**

///

## S6G: Undepressed Particle Phase Advance

We can now concretely connect  $\sigma_0$  for a stable orbit to the advance in particle oscillation phase  $\Delta\psi$  through one lattice period:

From **S5D**:

$$\cos \sigma_0 \equiv \frac{1}{2} \text{Tr } \mathbf{M}(s_i + L_p | s_i)$$

Apply the principal orbit representation of  $\mathbf{M}$

$$\text{Tr } \mathbf{M}(s_i + L_p | s_i) = C(s_i + L_p | s_i) + S'(s_i + L_p | s_i)$$

and use the phase-amplitude identifications of  $C$  and  $S'$  calculated in **S6F**:

$$\begin{aligned} \text{Tr } \mathbf{M}(s_i + L_p | s_i) &= \frac{1}{2} \left( \frac{w(s_i + L_p)}{w_i} + \frac{w_i}{w(s_i + L_p)} \right) \cos \Delta\psi(s_i + L_p) \\ &\quad + \frac{1}{2} (w_i w'(s_i + L_p) - w'_i w(s_i + L_p)) \sin \Delta\psi(s_i + L_p) \end{aligned}$$

By periodicity:

$$\begin{aligned} w(s_i + L_p) &= w(s_i) = w_i \\ w'(s_i + L_p) &= w'(s_i) = w'_i \end{aligned} \quad \Longrightarrow \quad \begin{aligned} \text{coefficient of } \cos \Delta\psi &= 1 \\ \text{coefficient of } \sin \Delta\psi &= 0 \end{aligned}$$

Applying these results gives:

$$\cos \sigma_0 = \cos \Delta\psi(s_i + L_p) = \frac{1}{2} \text{Tr } \mathbf{M}(s_i + L_p | s_i)$$

Thus,  $\sigma_0$  is identified as the **phase advance** of a stable particle orbit through one lattice period:

$$\sigma_0 = \Delta\psi(s_i + L_p) = \int_{s_i}^{s_i + L_p} \frac{ds}{w^2(s)}$$

- ◆ Again verifies that  $\sigma_0$  is independent of  $s_i$  since  $w(s)$  is periodic with period  $L_p$
- ◆ The **stability criterion** (see: **S5**)

$$\frac{1}{2} |\text{Tr } \mathbf{M}(s_i + L_p | s_i)| = |\cos \sigma_0| < 1$$

is concretely connected to the particle phase advance through one lattice period providing a useful physical interpretation

Consequence:

**Any periodic lattice with undepressed phase advance satisfying**

$$\sigma_0 < \pi / \text{period} = 180^\circ / \text{period}$$

**will have stable single particle orbits.**

## Discussion:

The **phase advance**  $\sigma_0$  is an extremely useful dimensionless measure to characterize the focusing strength of a periodic lattice. Much of conventional accelerator physics centers on focusing strength and the suppression of resonance effects. The phase advance is a natural parameter to employ in many situations to allow ready interpretation of results in a generalizable manner.

We present **phase advance formulas** for  $\sigma_0$  for several simple classes of lattices to help build intuition on focusing strength:

### 1) Continuous Focusing

### 2) Periodic Solenoidal Focusing

### 3) Periodic Quadrupole Doublet Focusing

- FODO Quadrupole Limit

◆ Lattices analyzed as “hard-edge” with piecewise-constant  $\kappa(s)$  and lattice period  $L_p$

◆ Results are summarized only with derivations guided in the problem sets.

### 4) Thin Lens Limits

- Useful for analysis of scaling properties

Several of these  
will be derived  
in the problem sets

## 1) Continuous Focusing


“Lattice period”  $L_p$  is an arbitrary length for phase accumulation

$$\kappa(s) = k_{\beta 0}^2 = \text{const} > 0$$

Parameters:

$L_p$  = Lattice Period

$k_{\beta 0}^2$  = Strength

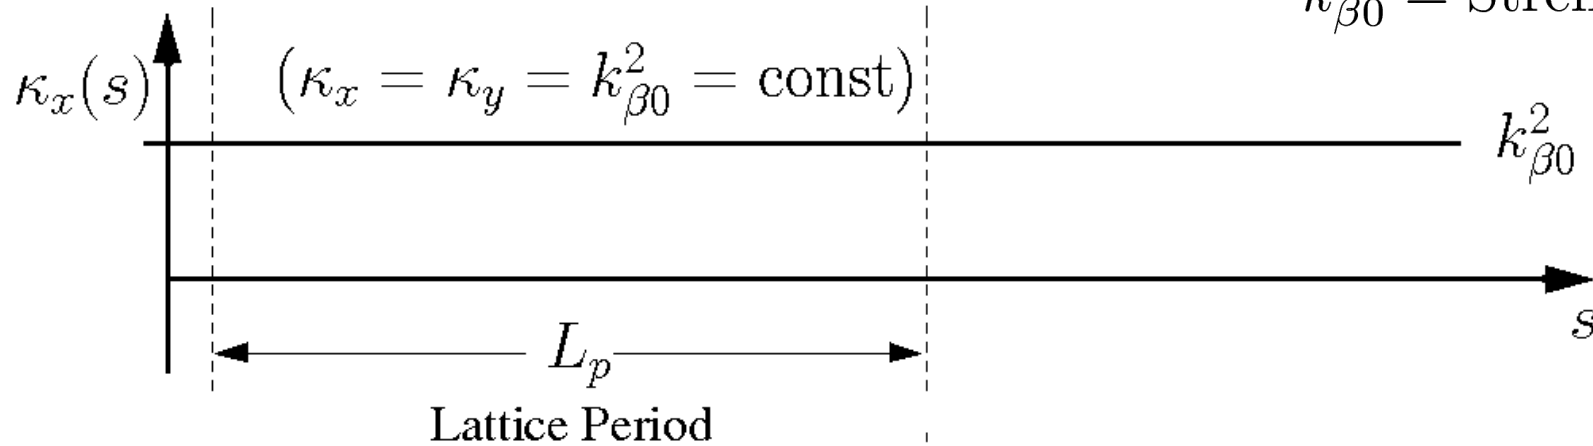

Calculation gives:

$$\sigma_0 = k_{\beta 0} L_p$$

◆ Always stable

- Energy cannot pump into or out of particle orbit

## Rescaled Principal Orbit Evolution:

$$L_p = 0.5 \text{ m}$$

$$1: x(0) = 1 \text{ mm}$$



$$2: x(0) = 0 \text{ mm}$$

$$\sigma_0 = \pi/3 = 60^\circ$$

$$x'(0) = 0 \text{ mrad}$$

$$x'(0) = 1 \text{ mrad}$$

$$k_{\beta 0} = (\pi/6) \text{ rad/m}$$

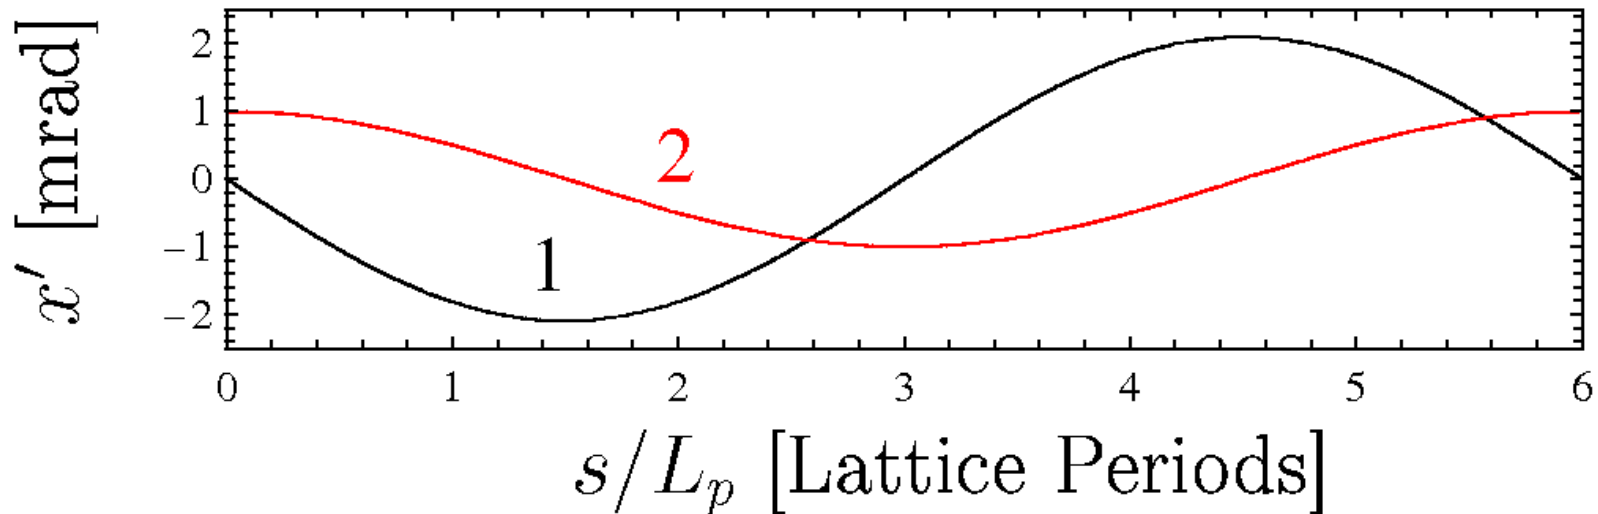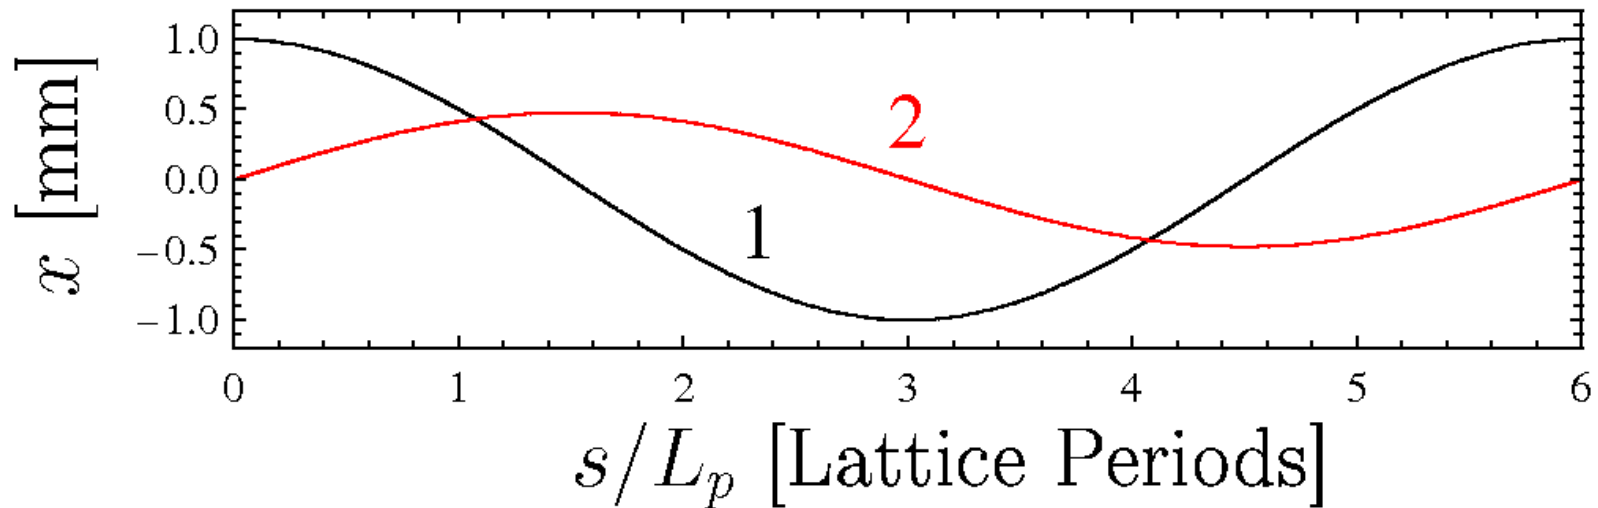


## Phase-Space Evolution (see also S7):

- ◆ Phase-space ellipse stationary and aligned along  $x$ ,  $x'$  axes for continuous focusing

$$w = \sqrt{1/k_{\beta 0}} = \text{const} \quad \gamma = \frac{1}{w^2} = k_{\beta 0} = \text{const}$$
$$w' = 0 \quad \alpha = -ww' = 0$$
$$\beta = w^2 = 1/k_{\beta 0} = \text{const}$$


$$k_{\beta 0}x^2 + x'^2/k_{\beta 0} = \epsilon = \text{const}$$

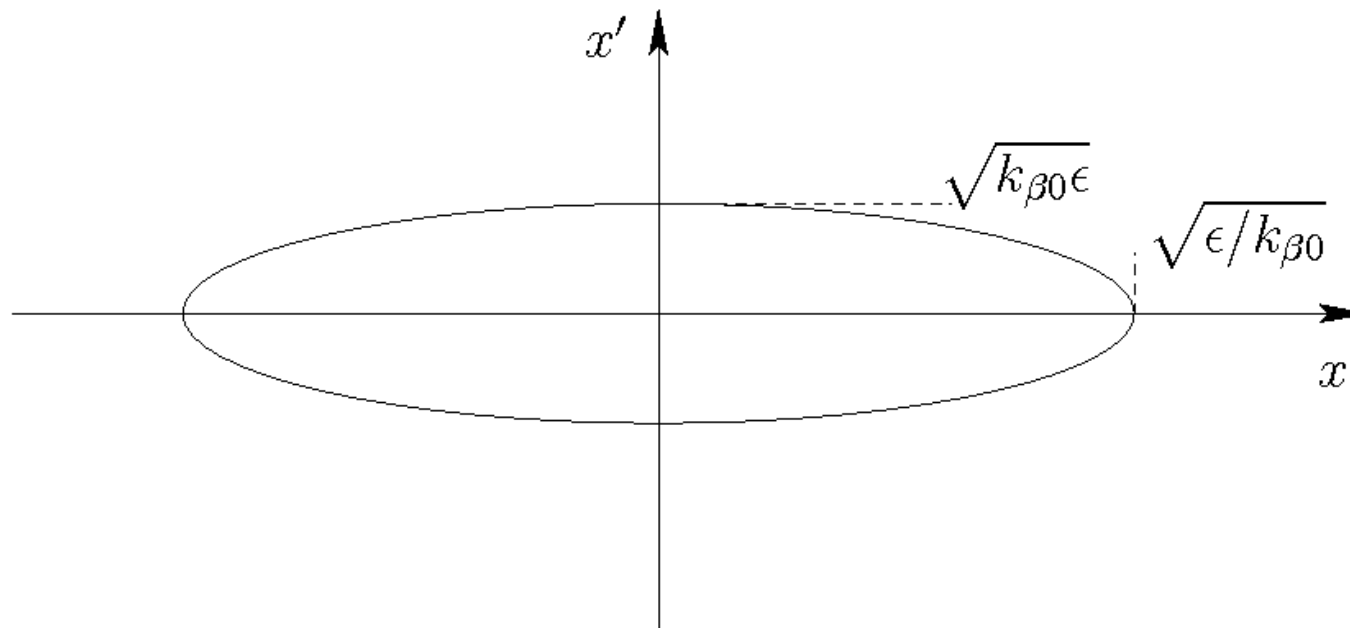



## 2) Periodic Solenoidal Focusing

Results are interpreted in the rotating Larmor frame (see **S2** and **Appendix A**)

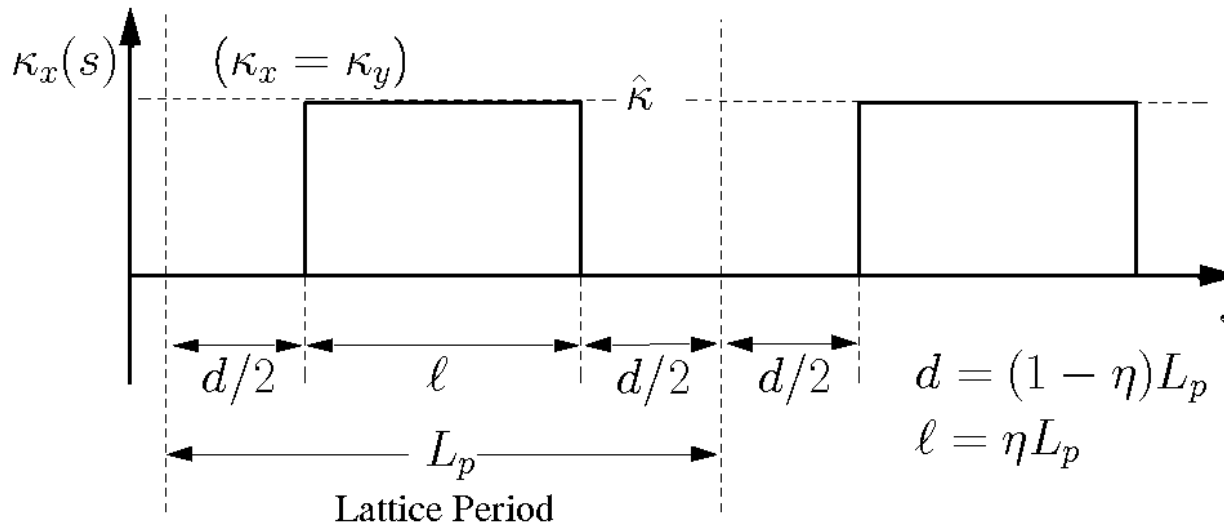

### Parameters:

$L_p$  = Lattice Period

$\eta \in (0, 1]$  = Occupancy

$\hat{\kappa}$  = Strength

### Characteristics:

$\eta L_p$  = Optic Length

$(1 - \eta)L_p$  = Drift Length

Calculation gives:

$$\cos \sigma_0 = \cos(2\Theta) - \frac{1 - \eta}{\eta} \Theta \sin(2\Theta) \quad \Theta \equiv \frac{\eta}{2} \sqrt{\hat{\kappa}} L_p$$



- ◆ Can be unstable when  $\hat{\kappa}$  becomes large
  - Energy can pump into or out of particle orbit

## Rescaled Larmor-Frame **Principal Orbit Evolution**:

$$L_p = 0.5 \text{ m} \quad 1: \tilde{x}(0) = 1 \text{ mm} \quad 2: \tilde{x}(0) = 0 \text{ mm}$$

$$\sigma_0 = \pi/3 = 60^\circ \quad (\kappa = 8.558 \text{ m}^{-2}) \quad \tilde{x}'(0) = 0 \text{ mrad} \quad \tilde{x}'(0) = 1 \text{ mrad}$$

$$\eta = 0.5$$

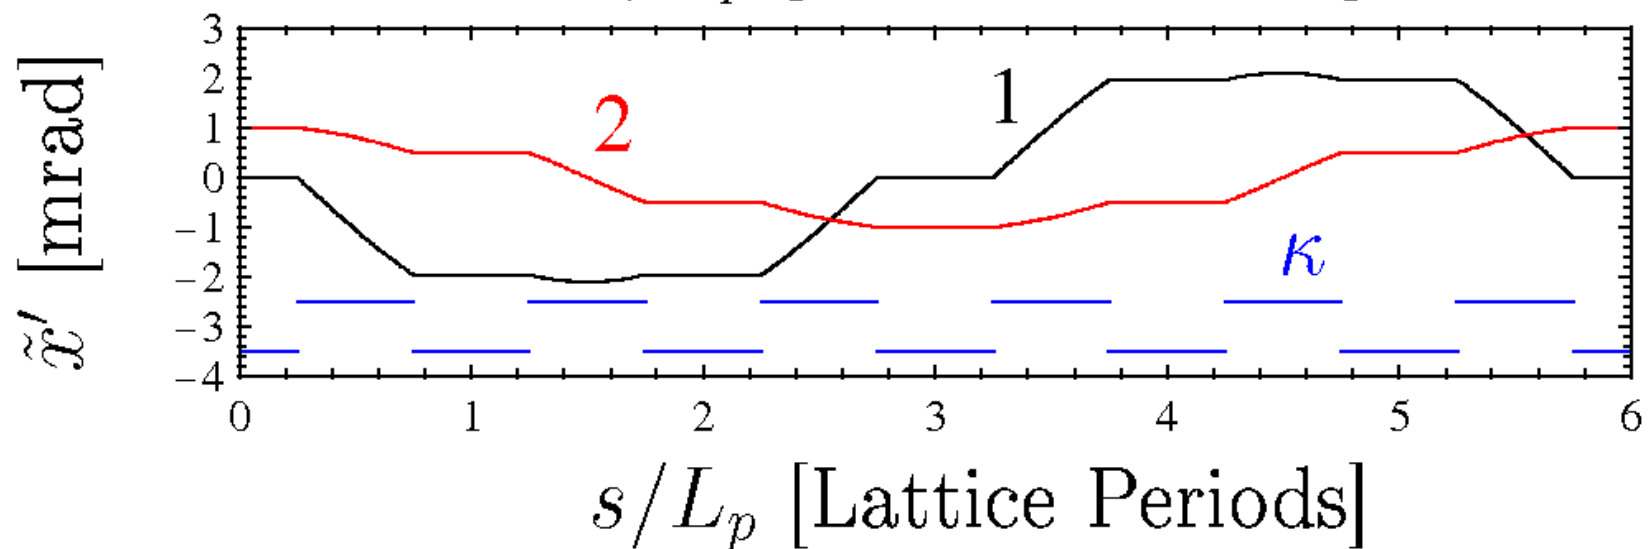
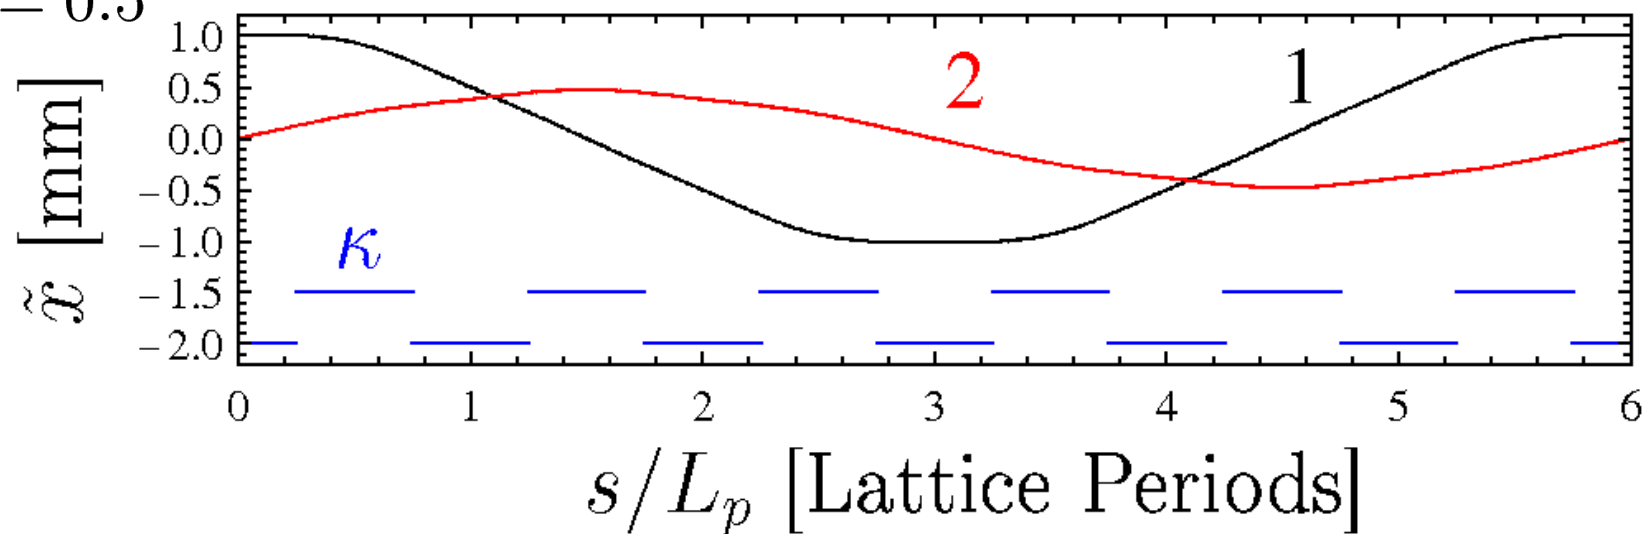


◆ Principal orbits in  $\tilde{y} - \tilde{y}'$  phase-space are identical

## Phase-Space Evolution in the Larmor frame (see also: S7):

- ◆ Phase-Space ellipse rotates and evolves in periodic lattice
- ◆  $\tilde{y} - \tilde{y}'$  phase-space properties same as in  $\tilde{x} - \tilde{x}'$ 
  - Phase-space structure in  $x-x', y-y'$  phase space is complicated


$$\gamma \tilde{x}^2 - 2\alpha \tilde{x}\tilde{x}' + \beta \tilde{x}'^2 = \epsilon = \text{const}$$

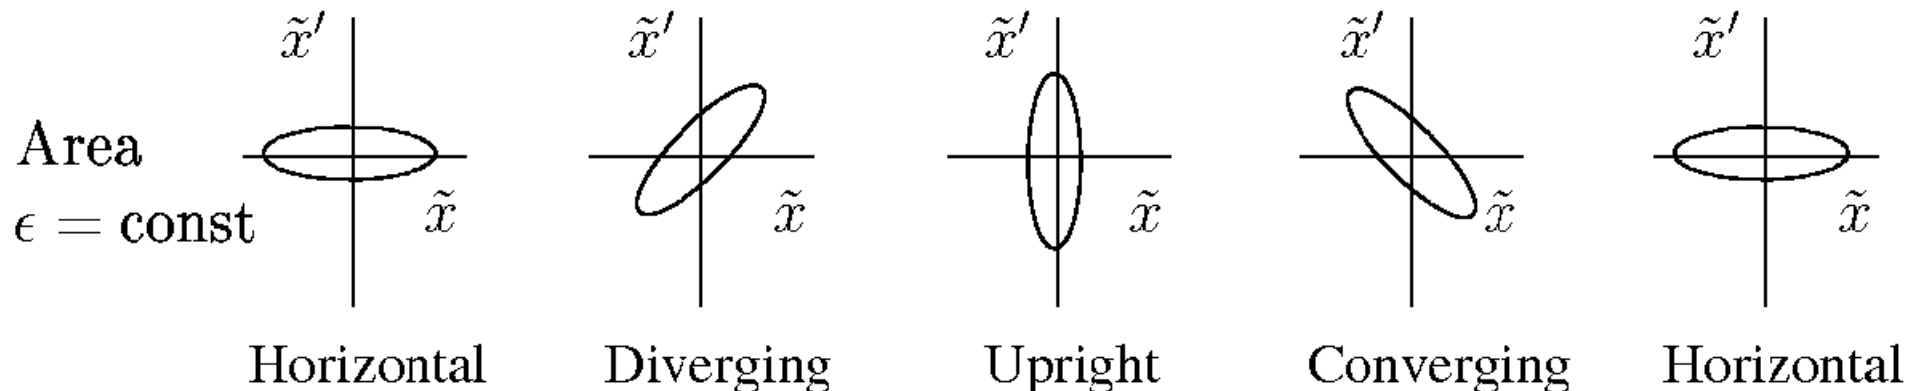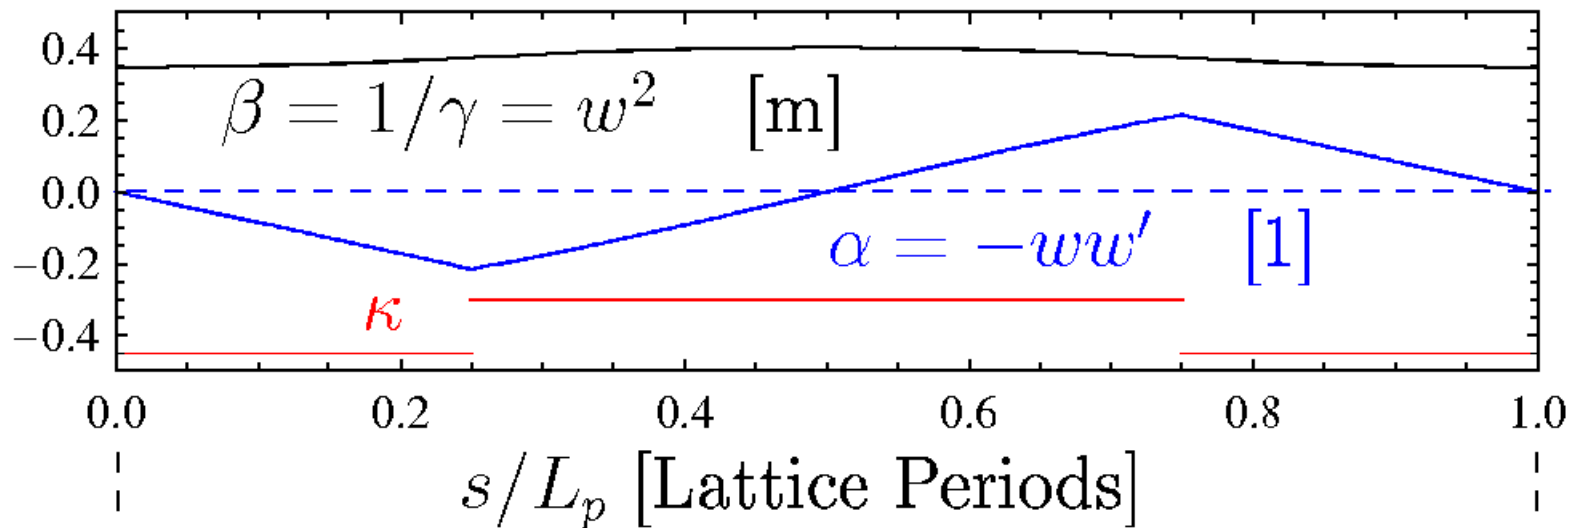

## Comments on periodic solenoid results:

- ◆ Larmor frame analysis greatly simplifies results
  - 4D coupled orbit in  $x-x'$ ,  $y-y'$  phase-space will be much more intricate in structure
- ◆ Phase-Space ellipse rotates and evolves in periodic lattice
- ◆ Periodic structure of lattice changes orbits from simple harmonic

### 3) Periodic Quadrupole Doublet Focusing

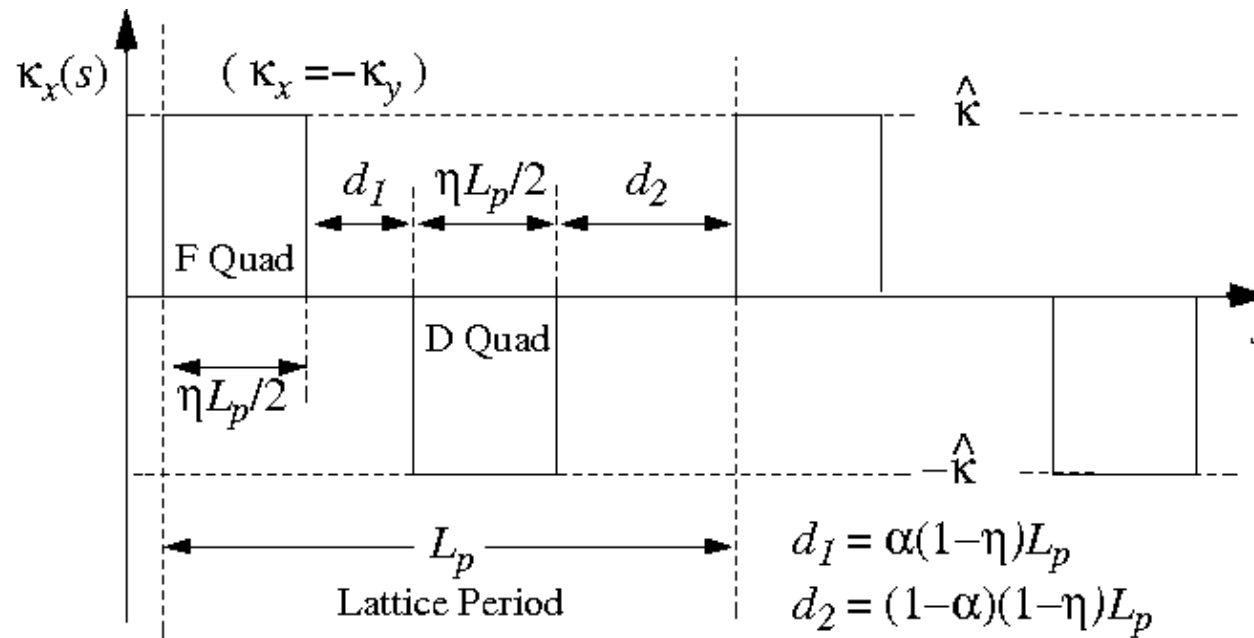

#### Parameters:

$L_p =$  Lattice Period  
 $\eta \in (0, 1] =$  Occupancy  
 $\alpha \in [0, 1] =$  Syncopation  
 $\hat{\kappa} =$  Strength

#### Characteristics:

$\eta L_p/2 =$  F/D Len  
 $\alpha(1 - \eta)L_p =$  Drift Len  $d_1$   
 $(1 - \alpha)(1 - \eta)L_p =$  Drift Len  $d_2$

Calculation gives:

$$\cos \sigma_0 = \cos \Theta \cosh \Theta + \frac{1 - \eta}{\eta} \Theta (\cos \Theta \sinh \Theta - \sin \Theta \cosh \Theta) - 2\alpha(1 - \alpha) \frac{(1 - \eta)^2}{\eta^2} \Theta^2 \sin \Theta \sinh \Theta$$

$$\Theta \equiv \frac{\eta}{2} \sqrt{|\hat{\kappa}|} L_p$$

- ♦ Can be unstable when  $\hat{\kappa}$  becomes large
- Energy can pump into or out of particle orbit

## Comments on Parameters:

- ◆ The “syncopation” parameter  $\alpha$  measures how close the Focusing (F) and DeFocusing (D) quadrupoles are to each other in the lattice

$$\alpha \in [0, 1] \quad \begin{array}{l} \alpha = 0 \quad \Longrightarrow \quad d_1 = 0 \quad d_2 = (1 - \eta)L_p \\ \alpha = 1 \quad \Longrightarrow \quad d_1 = (1 - \eta)L_p \quad d_2 = 0 \end{array}$$

The range  $\alpha \in [1/2, 1]$  can be mapped to  $\alpha \in [0, 1/2]$  by simply relabeling quantities. Therefore, we can take:

$$\alpha \in [0, 1/2]$$

- ◆ The special case of a doublet lattice with  $\alpha = 1/2$  corresponds to equal drift lengths between the F and D quadrupoles and is called a **FODO lattice**

$$\alpha = 1/2 \quad \Longrightarrow \quad d_1 = d_2 \equiv d = (1 - \eta)L_p/2$$

Phase advance constraint will be derived for FODO case in problems (algebra much simpler than doublet case)


## Special Case Doublet Focusing: Periodic Quadrupole FODO Lattice

### Parameters:

$L_p =$  Lattice Period  
 $\eta \in (0, 1] =$  Occupancy  
 $\hat{\kappa} =$  Strength

### Characteristics:

$\eta L_p/2 = \ell =$  F/D Len  
 $(1 - \eta)L_p/2 = d =$  Drift Len

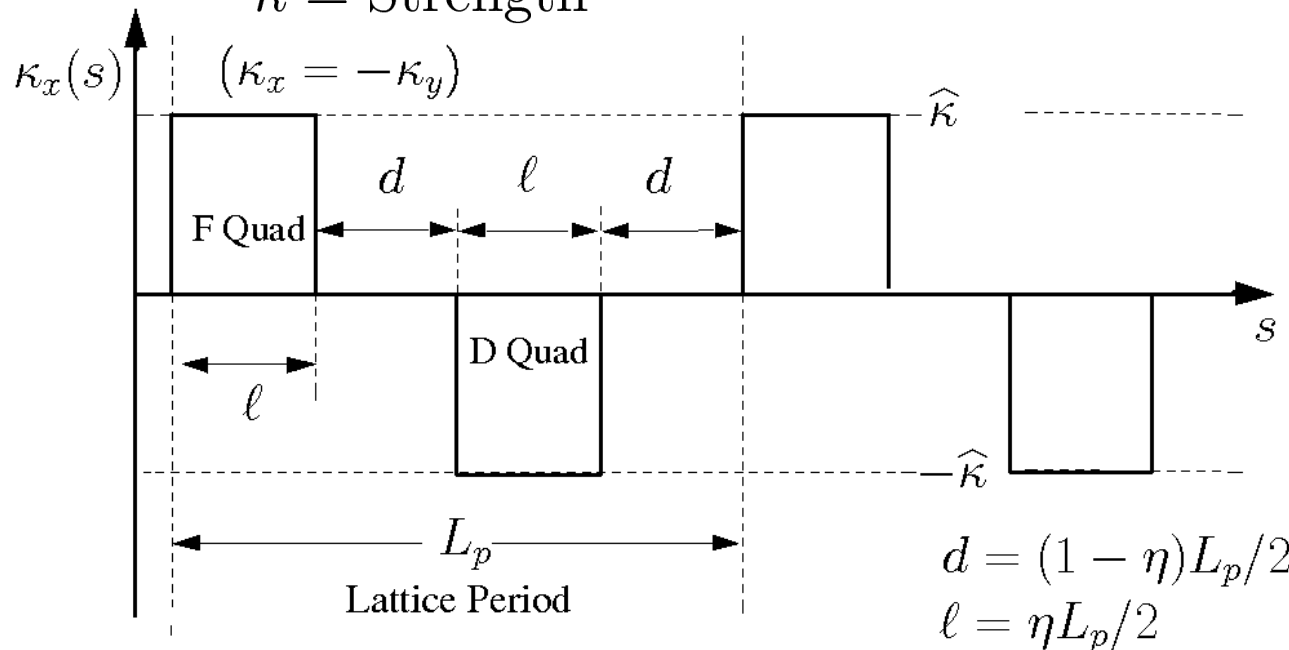

Phase advance formula reduces to:


$$\cos \sigma_0 = \cos \Theta \cosh \Theta + \frac{1 - \eta}{\eta} \Theta (\cos \Theta \sinh \Theta - \sin \Theta \cosh \Theta) - \frac{(1 - \eta)^2}{2\eta^2} \Theta^2 \sin \Theta \sinh \Theta$$

$$\Theta \equiv \frac{\eta}{2} \sqrt{|\hat{\kappa}|} L_p$$

- Analysis shows FODO provides stronger focus for same integrated field gradients than doublet due to symmetry

## Rescaled Principal Orbit Evolution:


$$L_p = 0.5 \text{ m} \quad 1: x(0) = 1 \text{ mm} \quad 2: x(0) = 0 \text{ mm}$$
$$\sigma_0 = \pi/3 = 60^\circ \quad (\kappa = 39.24 \text{ m}^{-2}) \quad x'(0) = 0 \text{ mrad} \quad x'(0) = 1 \text{ mrad}$$
$$\eta = 0.5$$

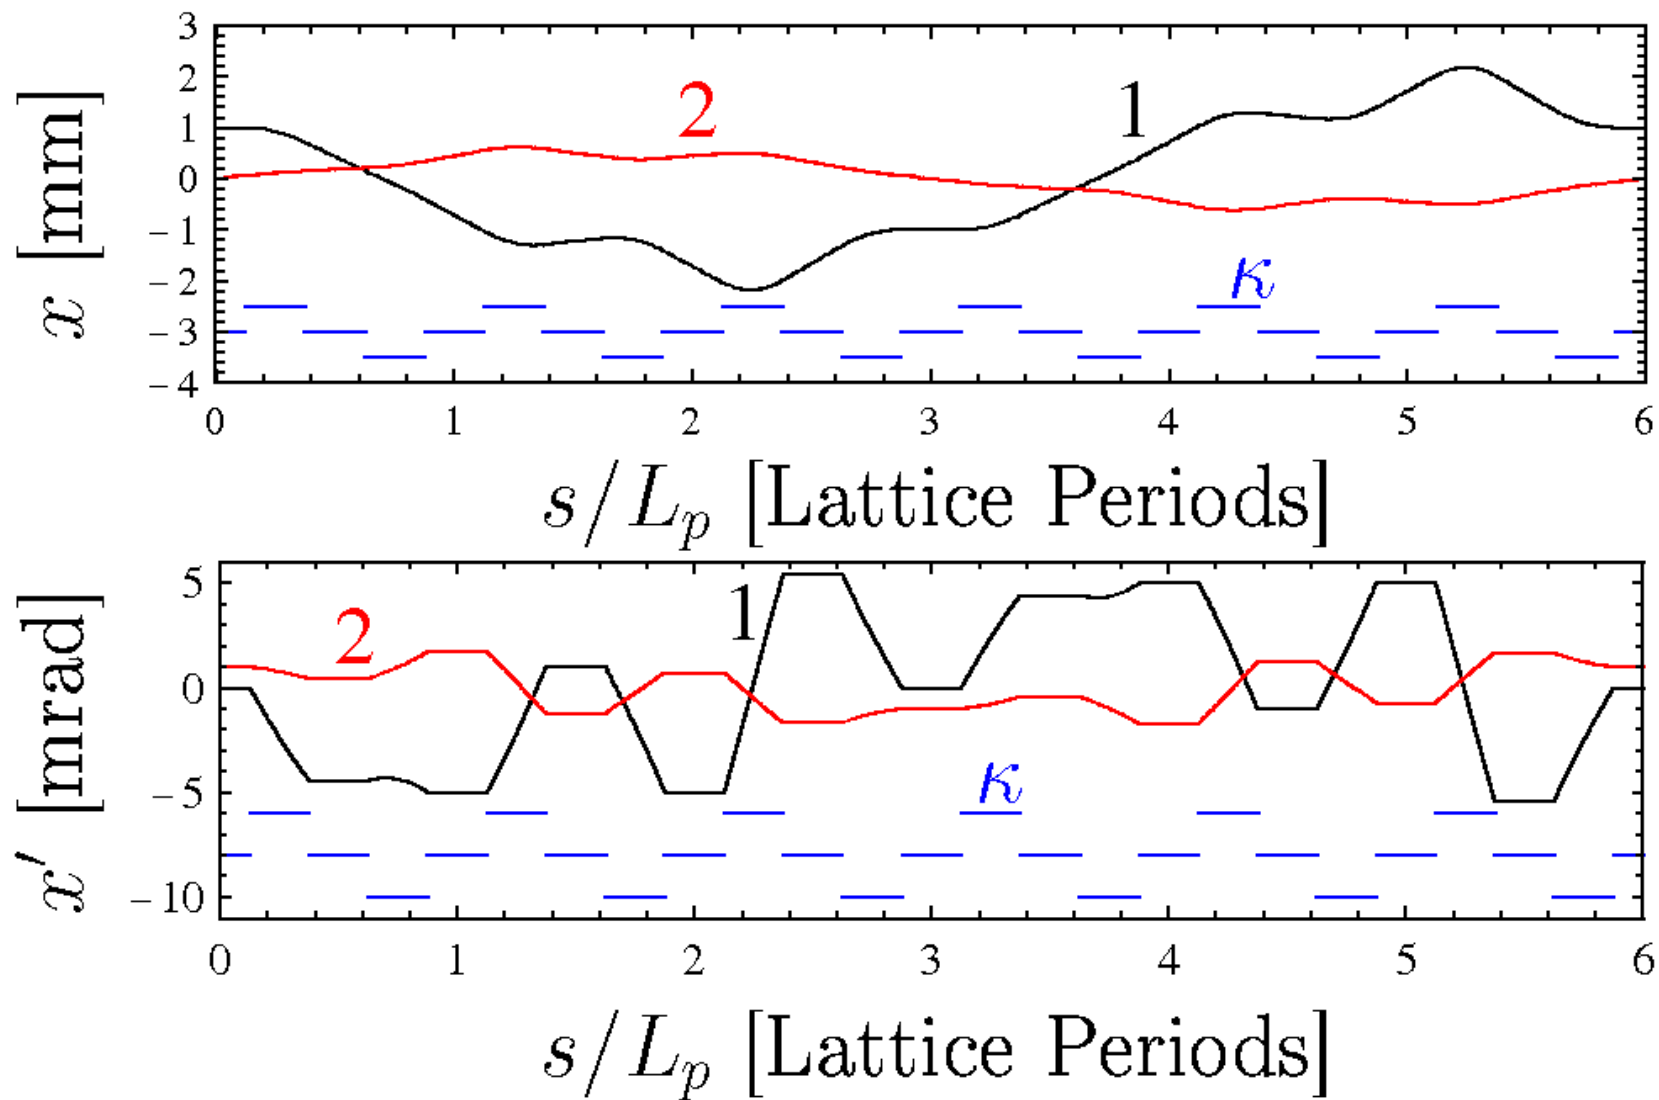



# Phase-Space Evolution (see also: S7):

$$\gamma x^2 - 2\alpha x x' + \beta x'^2 = \epsilon = \text{const}$$

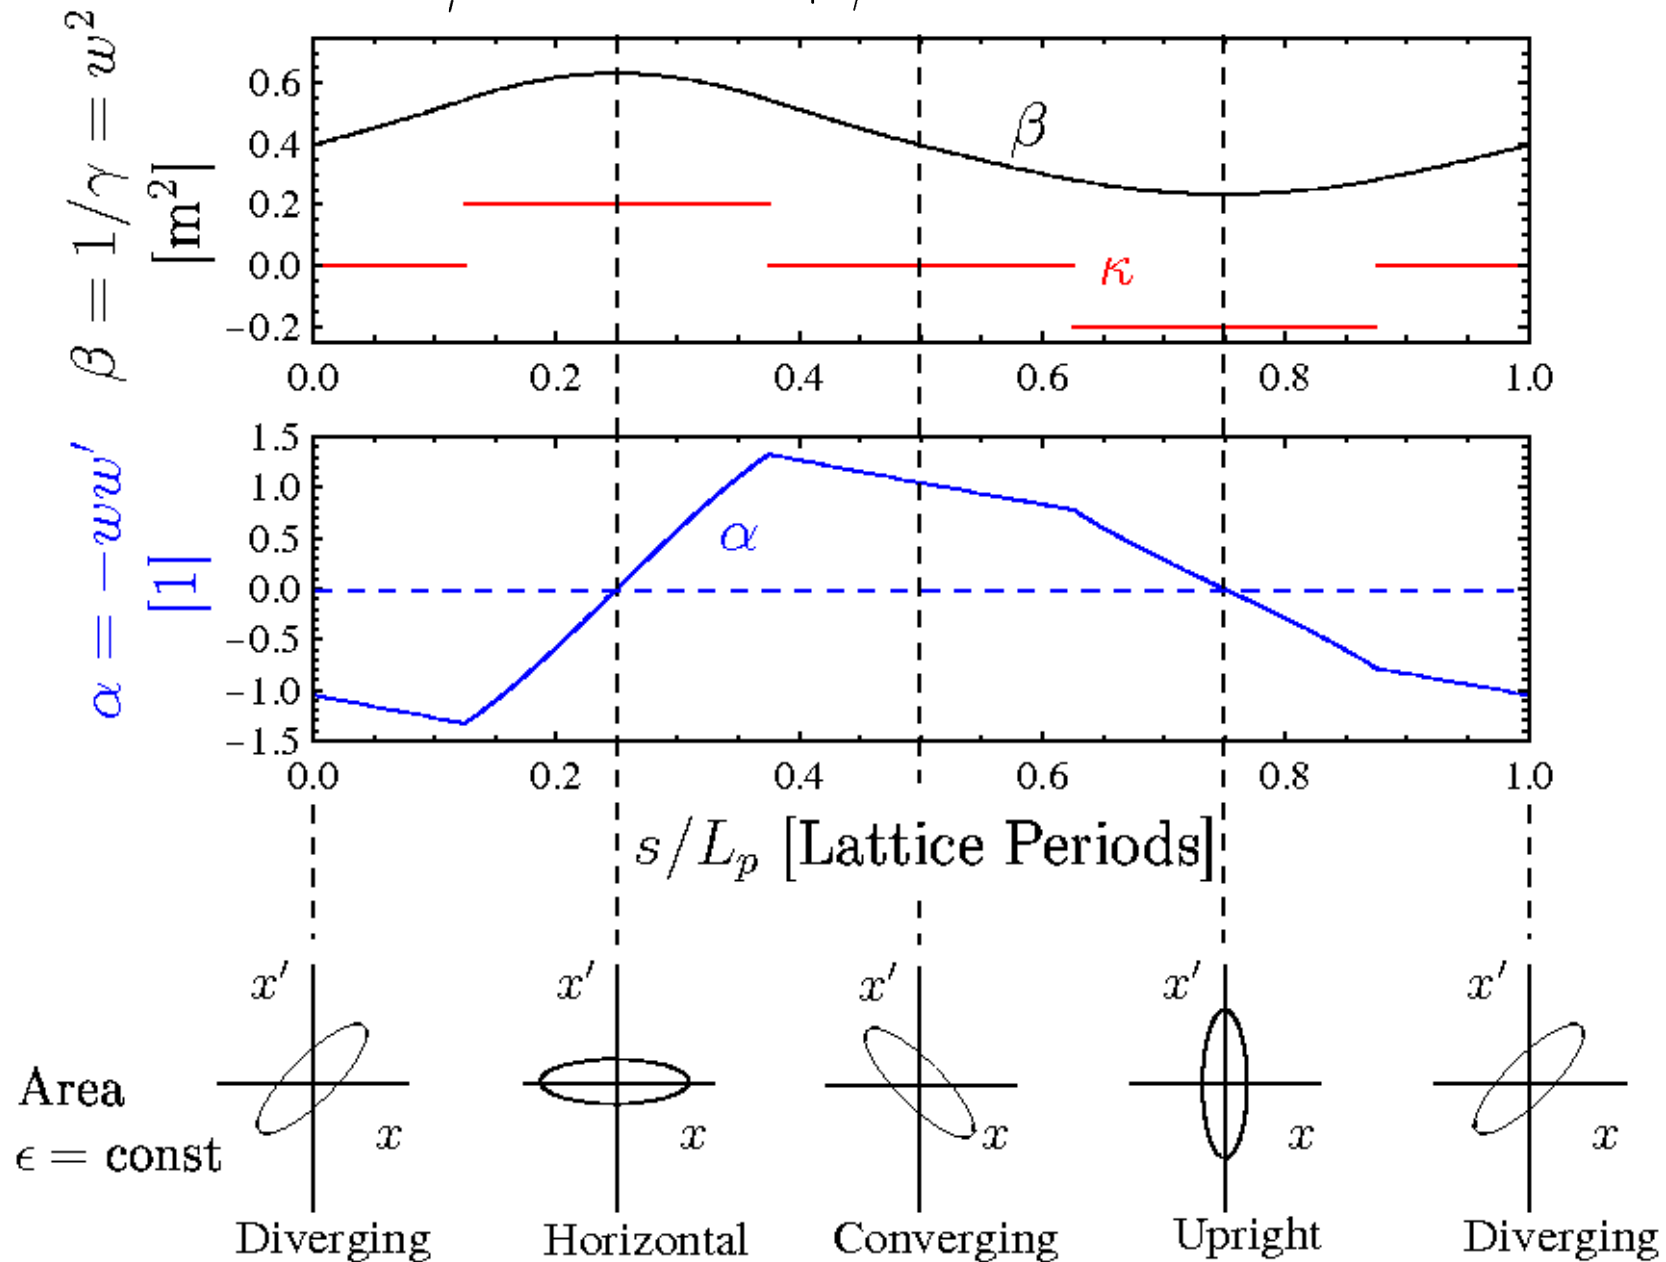


## Comments on periodic FODO quadrupole results:

- ♦ Phase-Space ellipse rotates and evolves in periodic lattice
  - Evolution more intricate for Alternating Gradient (AG) focusing than for solenoidal focusing in the Larmor frame
- ♦ Harmonic content of orbits larger for AG focusing than solenoidal focusing
- ♦ Orbit and phase space evolution analogous in  $y$ - $y'$  plane
  - Simply related by a shift in  $s$  of the lattice

## Contrast of Principal Orbits for different focusing:


- ◆ Use previous examples with “equivalent” focusing strength  $\sigma_0 = 60^\circ$
- ◆ Note that periodic focusing adds harmonic structure

### 1) Continuous Focusing

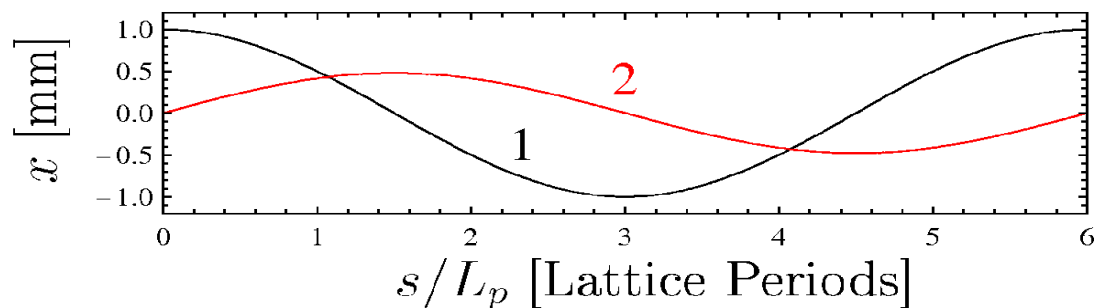


Simple Harmonic Oscillator

### 2) Periodic Solenoidal Focusing (Larmor Frame)

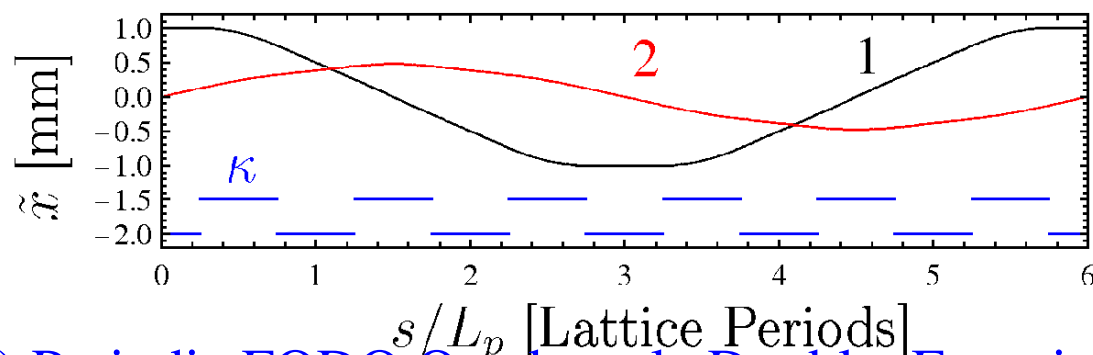

Simple harmonic oscillations modified with additional harmonics due to periodic focus

### 3) Periodic FODO Quadrupole Doublet Focusing

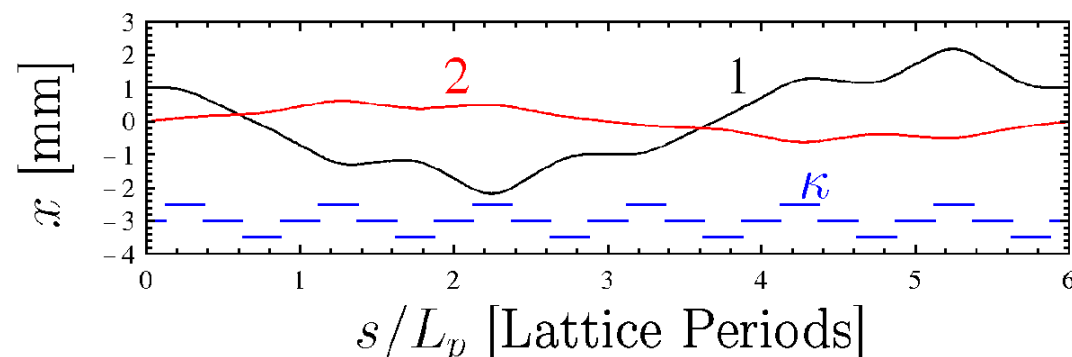

Simple harmonic oscillations more strongly modified due to periodic AG focus

## 4) Thin Lens Limits

Convenient to simply understand analytic scaling

$$\kappa_x(s) = \frac{1}{f} \delta(s - s_0)$$


$s_0 = \text{Optic Location} = \text{const}$

$f = \text{focal length} = \text{const}$

Transfer Matrix:

$$\begin{pmatrix} x \\ x' \end{pmatrix}_{s=s_0^+} = \begin{bmatrix} 1 & 0 \\ -1/f & 1 \end{bmatrix} \cdot \begin{pmatrix} x \\ x' \end{pmatrix}_{s=s_0^-}$$

Graphical Interpretation:

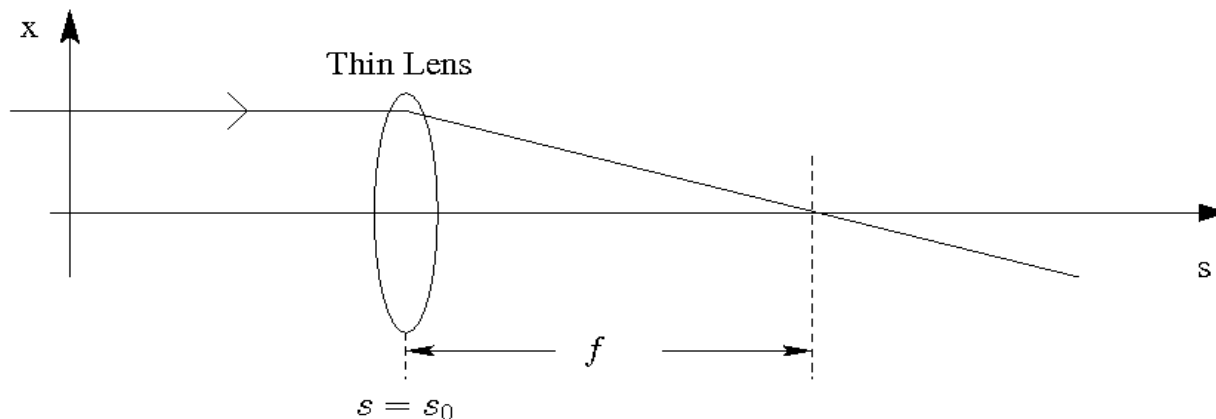

The thin lens limit of “thick” hard-edge solenoid and quadrupole focusing lattices presented can be obtained by taking:

**Solenoids:**  $\hat{\kappa} \equiv \frac{1}{\eta f L_p}$  then take  $\lim_{\eta \rightarrow 0}$

**Quadrupoles:**  $\hat{\kappa} \equiv \frac{2}{\eta f L_p}$  then take  $\lim_{\eta \rightarrow 0}$

This obtains when applied in the previous formulas:

$$\cos \sigma_0 = \begin{cases} 1 - \frac{1}{2} \frac{L_p}{f}, & \text{thin-lens periodic solenoid} \\ 1 - \frac{\alpha}{2} (1 - \alpha) \left( \frac{L_p}{f} \right)^2, & \text{thin-lens quadrupole doublet} \end{cases}$$

These formulas can also be derived directly from the drift and thin lens transfer matrices as

**Periodic Solenoid**

$$\cos \sigma_0 = \frac{1}{2} \text{Tr} \begin{bmatrix} 1 & L_p \\ 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 \\ -\frac{1}{f} & 1 \end{bmatrix} = 1 - \frac{1}{2} \frac{L_p}{f}$$

**Periodic Quadrupole Doublet**

$$\cos \sigma_0 = \frac{1}{2} \text{Tr} \begin{bmatrix} 1 & 0 \\ -\frac{1}{f} & 1 \end{bmatrix} \begin{bmatrix} 1 & \alpha L_p \\ 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 \\ \frac{1}{f} & 1 \end{bmatrix} \begin{bmatrix} 1 & (1 - \alpha) L_p \\ 0 & 1 \end{bmatrix} = 1 - \frac{\alpha}{2} (1 - \alpha) \left( \frac{L_p}{f} \right)^2$$

Expanded phase advance formulas (thin lens type limit and similar) can be useful in system design studies

- ◆ Desirable to derive simple formulas relating magnet parameters to  $\sigma_0$ 
  - Clear analytic scaling trends clarify design trade-offs
- ◆ For hard edge periodic lattices, expand formula for  $\cos \sigma_0$  to leading order in  $\Theta = \sqrt{|\hat{\kappa}|} \eta L_p / 2$

### /// Example: Periodic Quadrupole Doublet Focusing:

- ◆ Expand previous formula

$$\cos \sigma_0 = 1 - \frac{(\eta \hat{\kappa} L_p^2)^2}{32} \left[ \left( 1 - \frac{2}{3} \eta \right) - 4 \left( \alpha - \frac{1}{2} \right)^2 (1 - \eta)^2 \right]$$

where:



$$\hat{\kappa} = \begin{cases} \frac{\hat{G}}{[B\rho]}, & \text{Magnetic Quadrupoles} \\ \frac{\hat{G}}{\beta_b c [B\rho]}, & \text{Electric Quadrupoles} \end{cases} \quad \hat{G} = \text{Hard-Edge Field Gradient}$$

Using these results, plot the **Field Gradient** and **Integrated Gradient** for quadrupole doublet focusing needed for  $\sigma_0 = 80^\circ$  per lattice period

$$\text{Gradient} \sim |\hat{\kappa}| L_p^2 \sim \hat{G}$$

$$\text{Integrated Gradient} \sim \eta |\hat{\kappa}| L_p^2 / 2 \sim \hat{G} \ell$$

$\sigma_0 = 80^\circ$  / (Lattice Period) Quadrupole Doublet

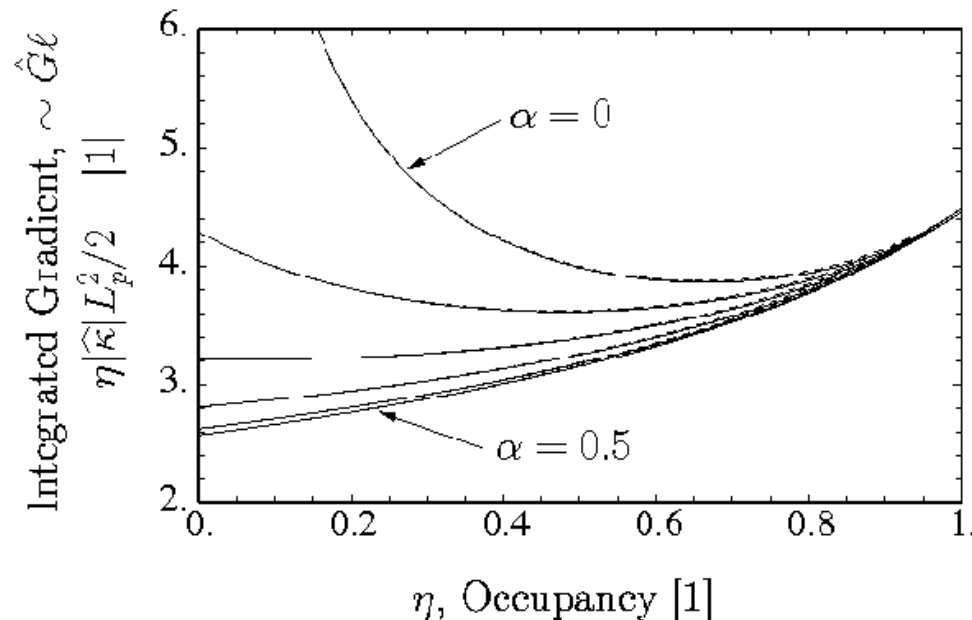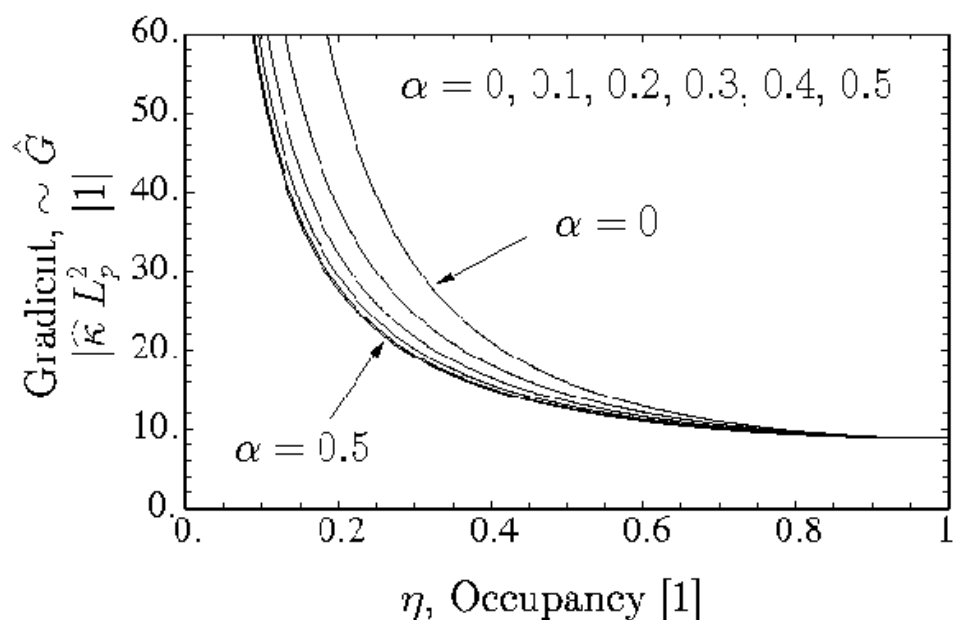

- ◆ Exact (non-expanded) solutions plotted dashed (almost overlay)
- ◆ **Gradient** and **integrated gradient** required depend only weakly on syncopation factor  $\alpha$  when  $\alpha$  is near  $1/2$
- ◆ Stronger **gradient** required for low occupancy  $\eta$  but integrated gradient varies little with  $\eta$

///

## Appendix C: Calculation of $w(s)$ from Principal Orbit Functions

Evaluate principal orbit expressions of the transfer matrix through one lattice period using

$$w(s_i + L_p) = w_i$$

$$w'(s_i + L_p) = w'_i$$

and

$$\Delta\psi(s_i + L_p) = \int_{s_i}^{s_i + L_p} \frac{ds}{w^2(s)} = \sigma_0$$

to obtain (see principal orbit formulas expressed in phase-amplitude form):

$$C(s_i + L_p | s_i) = \cos \sigma_0 - w_i w'_i \sin \sigma_0$$

$$S(s_i + L_p | s_i) = w_i^2 \sin \sigma_0$$

$$C'(s_i + L_p | s_i) = - \left( \frac{1}{w_i^2} + w_i w'_i \right) \sin \sigma_0$$

$$S'(s_i + L_p | s_i) = \cos \sigma_0 + w_i w'_i \sin \sigma_0$$



Giving:

$$w_i = \sqrt{\frac{S(s_i + L_p | s_i)}{\sin \sigma_0}}$$
$$w'_i = \frac{\cos \sigma_0 - C(s_i + L_p | s_i)}{\sqrt{S(s_i + L_p | s_i) \sin \sigma_0}}$$

Or in terms of the betatron formulation (see: **S7** and **S8**) with

$$\beta = w^2, \quad \beta' = 2ww'$$

$$\beta_i = w_i^2 = \frac{S(s_i + L_p | s_i)}{\sin \sigma_0}$$
$$\beta'_i = 2w_i w'_i = \frac{2[\cos \sigma_0 - C(s_i + L_p | s_i)]}{\sin \sigma_0}$$

Next, calculate  $w$  from the principal orbit expression in phase-amplitude form:

$$\frac{S}{w_i w} = \sin \Delta\psi$$

$$S \equiv S(s | s_i) \text{ etc.}$$

$$\frac{w_i}{w} C + \frac{w'_i}{w} S = \cos \Delta\psi$$

Square and add equations:

$$\left(\frac{S}{w_i w}\right)^2 + \left(\frac{w_i C}{w} + \frac{w'_i S}{w}\right)^2 = 1$$

- ◆ This result reflects the structure of the underlying Courant-Snyder invariant (see: **S7**)

Gives:

$$w^2 = \left(\frac{S}{w_i}\right)^2 + (w_i C + w'_i S)^2$$

Use  $w_i, w'_i$  previously identified and write out result:

$$w^2(s) = \beta(s) = \sin^2 \sigma_0 \frac{S^2(s|s_i)}{S(s_i + L_p|s_i)} + \frac{S(s_i + L_p|s_i)}{\sin \sigma_0} \left[ C(s|s_i) + \frac{\cos \sigma_0 - C(s_i + L_p|s_i)}{S(s_i + L_p|s_i)} S(s|s_i) \right]^2$$

- ◆ Formula shows that for a given  $\sigma_0$  (used to specify lattice focusing strength),  $w(s)$  is given by two linear principal orbits calculated over one lattice period
  - Easy to apply numerically

An alternative way to calculate  $w(s)$  is as follows. 1<sup>st</sup> apply the phase-amplitude formulas for the principal orbit functions with:

$$s_i \rightarrow s$$

$$s \rightarrow s + L_p$$

$$\begin{aligned} \Rightarrow C(s + L_p | s) &= \cos \sigma_0 - w(s)w'(s) \sin \sigma_0 \\ S(s + L_p | s) &= w^2(s) \sin \sigma_0 \end{aligned}$$

$$w^2(s) = \beta(s) = \frac{S(s + L_p | s)}{\sin \sigma_0} = \frac{\mathbf{M}_{12}(s + L_p | s)}{\sin \sigma_0}$$

- ◆ Formula requires calculation of  $S(s + L_p | s)$  at every value of  $s$  within lattice period
- ◆ Previous formula requires one calculation of  $C(s | s_i)$ ,  $S(s | s_i)$  for  $s_i \leq s \leq s_i + L_p$  and any value of  $s_i$

Matrix algebra can be applied to simplify this result:



$$\begin{aligned}
 \mathbf{M}(s + L_p|s) &= \mathbf{M}(s + L_p|s_i + L_p) \cdot \mathbf{M}(s_i + L_p|s) \\
 &= \mathbf{M}(s|s_i) \cdot \mathbf{M}(s_i + L_p|s) \cdot [\mathbf{M}(s|s_i) \cdot \mathbf{M}^{-1}(s|s_i)] \\
 &= \mathbf{M}(s|s_i) \cdot \mathbf{M}(s_i + L_p|s_i) \cdot \mathbf{M}^{-1}(s|s_i)
 \end{aligned}$$

$$\mathbf{M}(s + L_p|s) = \mathbf{M}(s|s_i) \cdot \mathbf{M}(s_i + L_p|s_i) \cdot \mathbf{M}^{-1}(s|s_i)$$

- Using this result with the previous formula allows the transfer matrix to be calculated only once per period from any initial condition

- Using:

$$\mathbf{M} = \begin{pmatrix} C & S \\ C' & S' \end{pmatrix} \quad \mathbf{M}^{-1} = \begin{pmatrix} S' & -S \\ -C' & C \end{pmatrix}$$

Apply Wronskian condition:

$$\det \mathbf{M} = 1$$

The matrix formula can be shown to be equivalent to the previous one

- Methodology applied in: Lund, Chilton, and Lee, PRSTAB **9** 064201 (2006) to construct a fail-safe iterative matched envelope including space-charge **C5**

# S7: Hill's Equation: The Courant-Snyder Invariant and Single Particle Emittance

## S7A: Introduction

Constants of the motion can simplify the interpretation of dynamics in physics

- ◆ Desirable to identify constants of motion for Hill's equation for improved understanding of focusing in accelerators
- ◆ Constants of the motion are not immediately obvious for Hill's Equation due to  $s$ -varying focusing forces related to  $\kappa(s)$  can add and remove energy from the particle
  - Wronskian symmetry is one useful symmetry
  - Are there other symmetries?

### /// Illustrative Example: Continuous Focusing/Simple Harmonic Oscillator

Equation of motion:

$$x'' + k_{\beta 0}^2 x = 0 \quad k_{\beta 0}^2 = \text{const} > 0$$

Constant of motion is the well-known Hamiltonian/Energy:

$$H = \frac{1}{2} x'^2 + \frac{1}{2} k_{\beta 0}^2 x^2 = \text{const}$$

which shows that the particle moves on an ellipse in  $x$ - $x'$  phase-space with:


- ◆ Location of particle on ellipse set by initial conditions
- ◆ All initial conditions with same energy/ $H$  give same ellipse

$$\text{Max/Min}[x] \Leftrightarrow x' = 0$$

$$\text{Max/Min}[x] = \pm \sqrt{2H/k_{\beta 0}^2}$$

$$\text{Max/Min}[x'] \Leftrightarrow x = 0$$

$$\text{Max/Min}[x'] = \pm \sqrt{2H}$$

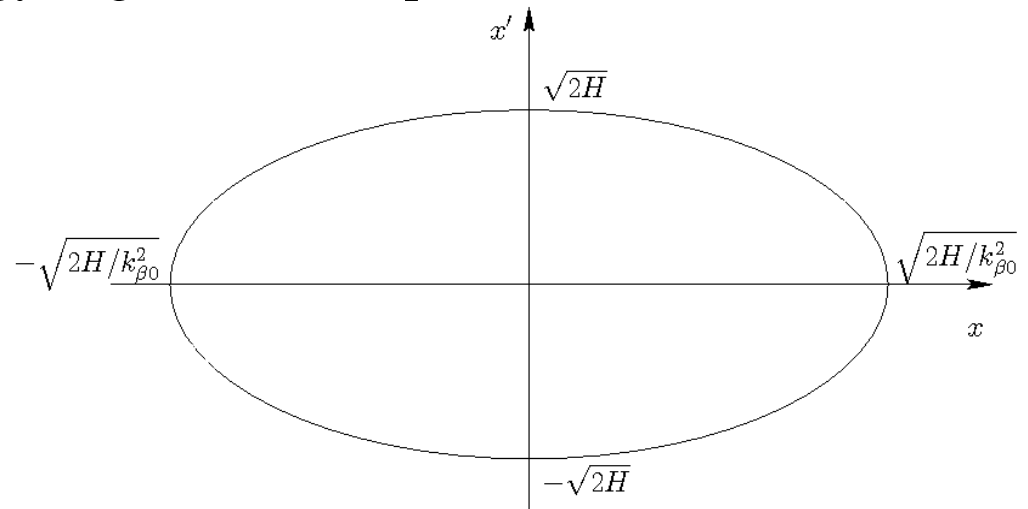

///

## Question:

For Hill's equation:

$$x'' + \kappa(s)x = 0$$

does a quadratic invariant exist that can aid interpretation of the dynamics?

Answer we will find:

Yes, the Courant-Snyder invariant

Comments:

- ♦ Very important in accelerator physics
  - Helps interpretation of linear dynamics
- ♦ Named in honor of Courant and Snyder who popularized its use in Accelerator physics while co-discovering alternating gradient (AG) focusing in a single seminal (and very elegant) paper:
  - Courant and Snyder, *Theory of the Alternating Gradient Synchrotron*, Annals of Physics **3**, 1 (1958).
  - Christofolos also understood AG focusing in the same period using a more heuristic analysis
- ♦ Easily derived using phase-amplitude form of orbit solution
  - Can be much harder using other methods

## S7B: Derivation of Courant-Snyder Invariant

The phase amplitude method described in S6 makes identification of the invariant elementary. Use the phase amplitude form of the orbit:

$$x(s) = A_i w(s) \cos \psi(s)$$

$$x'(s) = A_i w'(s) \cos \psi(s) - \frac{A_i}{w(s)} \sin \psi(s)$$

$A_i, \psi_i = \psi(s_i)$   
set by initial  
at  $s = s_i$

where

$$w'' + \kappa(s)w - \frac{1}{w^3} = 0$$

Re-arrange the phase-amplitude trajectory equations:

$$\frac{x}{w} = A_i \cos \psi$$

$$wx' - w'x = A_i \sin \psi$$

square and add the equations to obtain the **Courant-Snyder invariant**:

$$\begin{aligned} \left(\frac{x}{w}\right)^2 + (wx' - w'x)^2 &= A_i^2 (\cos^2 \psi + \sin^2 \psi) \\ &= A_i^2 = \text{const} \end{aligned}$$



## Comments on the Courant-Snyder Invariant:

- ◆ Simplifies interpretation of dynamics (will show how shortly)
- ◆ Extensively used in accelerator physics
- ◆ Quadratic structure in  $x$ - $x'$  defines a **rotated ellipse** in  $x$ - $x'$  phase space.

◆ Because 
$$w^2 \left( \frac{x}{w} \right)' = wx' - w'x$$

the Courant-Snyder invariant can be alternatively expressed as:

$$\left( \frac{x}{w} \right)^2 + \left[ w^2 \left( \frac{x}{w} \right)' \right]^2 = \text{const}$$

- ◆ *Cannot* be interpreted as a conserved energy!

The point that the Courant-Snyder invariant is *not* a conserved energy should be elaborated on. The equation of motion:

$$x'' + \kappa(s)x = 0$$

Is derivable from the Hamiltonian

$$H = \frac{1}{2}x'^2 + \frac{1}{2}\kappa x^2 \quad \Longrightarrow \quad \begin{aligned} \frac{d}{ds}x &= \frac{\partial H}{\partial x'} = x' \\ \frac{d}{ds}x' &= -\frac{\partial H}{\partial x} = -\kappa x \end{aligned} \quad \Longrightarrow \quad x'' + \kappa x = 0$$

$H$  is the energy:

$$H = \frac{1}{2}x'^2 + \frac{1}{2}\kappa x^2 = T + V$$

$$T = \frac{1}{2}x'^2 = \text{Kinetic "Energy"}$$
$$V = \frac{1}{2}\kappa x^2 = \text{Potential "Energy"}$$

Apply the chain-Rule with  $H = H(x, x'; s)$ :

$$\frac{dH}{ds} = \frac{\partial H}{\partial s} + \frac{\partial H}{\partial x} \frac{dx}{ds} + \frac{\partial H}{\partial x'} \frac{dx'}{ds}$$

Apply the equation of motion:

$$\frac{d}{ds}x = \frac{\partial H}{\partial x'} \quad \frac{d}{ds}x' = -\frac{\partial H}{\partial x}$$

$$\frac{dH}{ds} = \frac{\partial H}{\partial s} - \frac{dx'}{ds} \frac{dx}{ds} + \frac{dx}{ds} \frac{dx'}{ds} = \frac{\partial H}{\partial s} = \frac{1}{2}\kappa' x^2 \neq 0$$

$$\implies \boxed{H \neq \text{const}}$$

- ◆ Energy of a “kicked” oscillator with  $\kappa(s) \neq \text{const}$  is not conserved
- ◆ Energy should not be confused with the Courant-Snyder invariant

/// Aside: Only for the special case of **continuous focusing** (i.e., a simple Harmonic oscillator) are the Courant-Snyder invariant and energy simply related:

**Continuous Focusing:**  $\kappa(s) = k_{\beta 0}^2 = \text{const}$

$$\implies H = \frac{1}{2}x'^2 + \frac{1}{2}k_{\beta 0}^2 x^2 = \text{const}$$

**w equation:**  $w'' + k_{\beta 0}^2 w - \frac{1}{w^3} = 0$

$$\implies w = \sqrt{\frac{1}{k_{\beta 0}}} = \text{const}$$

**Courant-Snyder Invariant:**  $\left(\frac{x}{w}\right)^2 + (wx' - w'x)^2 = \text{const}$

$$\begin{aligned} \implies \left(\frac{x}{w}\right)^2 + (wx' - w'x)^2 &= k_{\beta 0}x^2 + \frac{x'^2}{k_{\beta 0}} \\ &= \frac{2}{k_{\beta 0}} \left( \frac{1}{2}x'^2 + \frac{1}{2}\kappa x^2 \right) \\ &= \frac{2H}{k_{\beta 0}} = \text{const} \end{aligned}$$

///

Interpret the **Courant-Snyder invariant**:

$$\left(\frac{x}{w}\right)^2 + (wx' - w'x)^2 = A_i^2 = \text{const}$$

by expanding and isolating terms quadratic terms in  $x$ - $x'$  phase-space variables:

$$\left[\frac{1}{w^2} + w'^2\right] x^2 + 2[-ww']xx' + [w^2]x'^2 = A_i^2 = \text{const}$$

The three coefficients in [...] are functions of  $w$  and  $w'$  only and therefore are *functions of the lattice only* (not particle initial conditions). They are commonly called “**Twiss Parameters**” and are expressed denoted as:

$$\gamma x^2 + 2\alpha xx' + \beta x'^2 = A_i^2 = \text{const}$$

$$\gamma(s) \equiv \frac{1}{w^2(s)} + [w'(s)]^2 = \frac{1 + \alpha^2(s)}{\beta(s)}$$

$$\beta(s) \equiv w^2(s)$$

$$\alpha(s) \equiv -w(s)w'(s)$$

- ◆ Only 2 of the three Twiss parameters are “independent” (i.e.,  $w$ ,  $w'$  determine all 3)

The area of the invariant ellipse is:

- Apply standard formulas from Analytic Geometry or calculate


$$\text{Area} = \int_{\text{ellipse}} dx dx' = \frac{\pi A_i^2}{\sqrt{\gamma\beta - \alpha^2}} = \pi A_i^2 \equiv \pi\epsilon$$

where  $\epsilon$  is the **single-particle emittance**:

- Emittance is the area of the orbit in  $x$ - $x'$  phase-space divided by  $\pi$

$$[1/w^2 + w'^2]x^2 + 2[-ww']xx' + [w^2]x'^2 = \epsilon$$

$$\gamma x^2 + 2\alpha xx' + \beta x'^2 = \epsilon = \text{const}$$

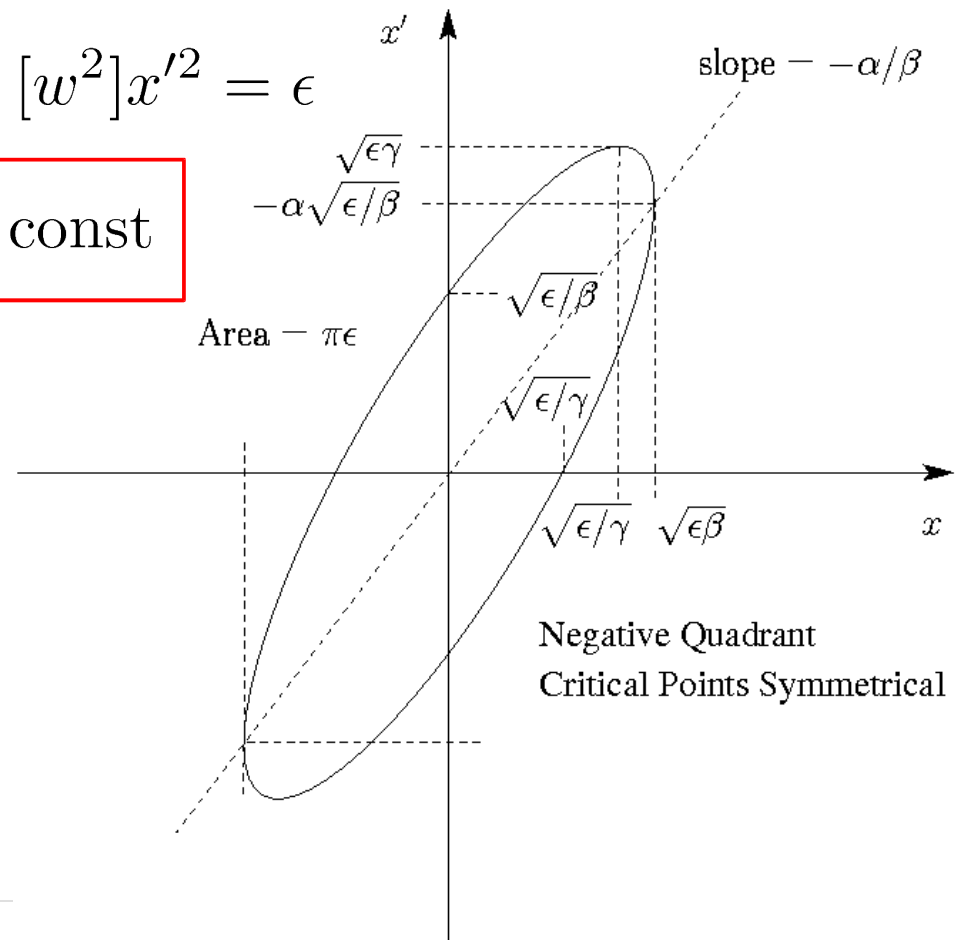

See problem sets  
for critical point  
calculation

/// Aside on Notation: [Twiss Parameters](#) and [Emittance Units](#):

### [Twiss Parameters](#):

Use of  $\alpha$ ,  $\beta$ ,  $\gamma$  should not create confusion with kinematic relativistic factors

- ◆  $\beta_b$ ,  $\gamma_b$  are absorbed in the focusing function  $\kappa$
- ◆ Contextual use of notation unfortunate reality .... not enough symbols!

### [Emittance Units](#):

$x$  has dimensions of length and  $x'$  is a dimensionless angle. So  $x$ - $x'$  phase-space area and  $\epsilon$  has dimensions  $[[\epsilon]] = \text{length}$ . A common choice of units is millimeters (mm) and milliradians (mrad), e.g.,

$$\epsilon = 10 \text{ mm-mrad}$$

The definition of the emittance employed is not unique and different workers use a wide variety of symbols. Some common notational choices:

- ◆  $\pi\epsilon \rightarrow \epsilon$        $\epsilon \rightarrow \varepsilon$        $\epsilon \rightarrow E$
- ◆ Write the emittance values in units with a  $\pi$ , e.g.,

$$\epsilon = 10.5 \pi \text{ mm-mrad}$$

**Use caution! Understand conventions being used before applying results!**

///

## Properties of Courant-Snyder Invariant:

- ◆ The ellipse will **rotate** and **change shape** as the particle advances through the focusing lattice, but the instantaneous **area** of the ellipse (  $\pi\epsilon = \text{const}$  ) **remains constant**.
- ◆ The **location** of the particle on the ellipse and the **size** (area) of the ellipse depends on the initial conditions of the particle.
- ◆ The **orientation** of the ellipse is **independent of the particle initial conditions**.  
**All particles move on nested ellipses.**
- ◆ **Quadratic** in the  $x-x'$  phase-space coordinates, but is **not the transverse particle energy** (which is not conserved).

## S7C: Lattice Maps

The **Courant-Snyder invariant** helps us understand the phase-space evolution of the particles. Knowing how the ellipse transforms (twists and rotates without changing area) is equivalent to knowing the dynamics of a *bundle* of particles.

To see this:

**General  $s$ :**

$$\gamma x^2 + 2\alpha x x' + \beta x'^2 = \epsilon$$

**Initial  $s = s_i$ :**

$$\gamma_i x_i^2 + 2\alpha_i x_i x'_i + \beta_i x_i'^2 = \epsilon$$

$$\beta_i \equiv \beta(s = s_i) \quad x_i \equiv x(s = s_i)$$

$$\alpha_i \equiv \alpha(s = s_i) \quad x'_i \equiv x'(s = s_i)$$

$$\gamma_i \equiv \gamma(s = s_i)$$

Apply the components of the transport matrix:

$$\begin{bmatrix} x \\ x' \end{bmatrix} = \mathbf{M}(s|s_i) \cdot \begin{bmatrix} x_i \\ x'_i \end{bmatrix} = \begin{bmatrix} C(s|s_i) & S(s|s_i) \\ C'(s|s_i) & S'(s|s_i) \end{bmatrix} \cdot \begin{bmatrix} x_i \\ x'_i \end{bmatrix}$$

Invert 2x2 matrix and apply  $\det \mathbf{M} = 1$  (Wronskian):

$$\implies \begin{bmatrix} x_i \\ x'_i \end{bmatrix} = \begin{bmatrix} S' & -S \\ -C' & C \end{bmatrix} \cdot \begin{bmatrix} x \\ x' \end{bmatrix} \quad C \equiv C(s|s_i), \text{ etc.}$$



Insert expansion for  $x_i$ ,  $x'_i$  in the initial ellipse expression, collect factors of  $x^2$ ,  $xx'$ , and  $x'^2$ , and equate to general ellipse expression:

$$\begin{aligned}
 & [\gamma_i S'^2 - 2\alpha_i S' C' + \beta_i C'^2] x^2 \\
 & + 2[-\gamma_i S S' + \alpha_i (C S' + S C') - \beta_i C C'] x x' \\
 & + [\gamma_i S^2 - 2\alpha_i S C + \beta_i C^2] x'^2 \\
 & = \gamma x^2 + 2\alpha x x' + \beta x'^2
 \end{aligned}$$

Collect coefficients of  $x^2$ ,  $xx'$ , and  $x'^2$  and summarize in matrix form:

$$\begin{bmatrix} \gamma \\ \alpha \\ \beta \end{bmatrix} = \begin{bmatrix} S'^2 & -2C'S' & C'^2 \\ -SS' & CS' + SC' & -CC' \\ S^2 & -2CS & C^2 \end{bmatrix} \cdot \begin{bmatrix} \gamma_i \\ \beta_i \\ \alpha_i \end{bmatrix}$$

This result can be applied to illustrate how a bundle of particles will evolve from an initial location in the lattice subject to the linear focusing optics in the machine using only principal orbits  $C$ ,  $S$ ,  $C'$ , and  $S'$

- ◆ Principal orbits will generally need to be calculated numerically
  - Intuition can be built up using simple analytical results (hard edge etc)

/// Example: Ellipse Evolution in a simple kicked focusing lattice

Drift: 
$$\begin{bmatrix} C & S \\ C' & S' \end{bmatrix} = \begin{bmatrix} 1 & s - s_i \\ 0 & 1 \end{bmatrix}$$

$$\gamma = \gamma_i$$

$$\alpha = -\gamma_i(s - s_i) + \alpha_i$$


$$\beta = \gamma_i(s - s_i)^2 - 2\alpha_i(s - s_i) + \beta_i$$

Thin Lens:  
focal length  $f$  
$$\begin{bmatrix} C & S \\ C' & S' \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ -1/f & 1 \end{bmatrix}$$

$$\gamma = \gamma_i + 2\alpha_i/f + \beta_i/f^2$$

$$\alpha = -\beta_i/f + \alpha_i$$

$$\beta = \beta_i$$

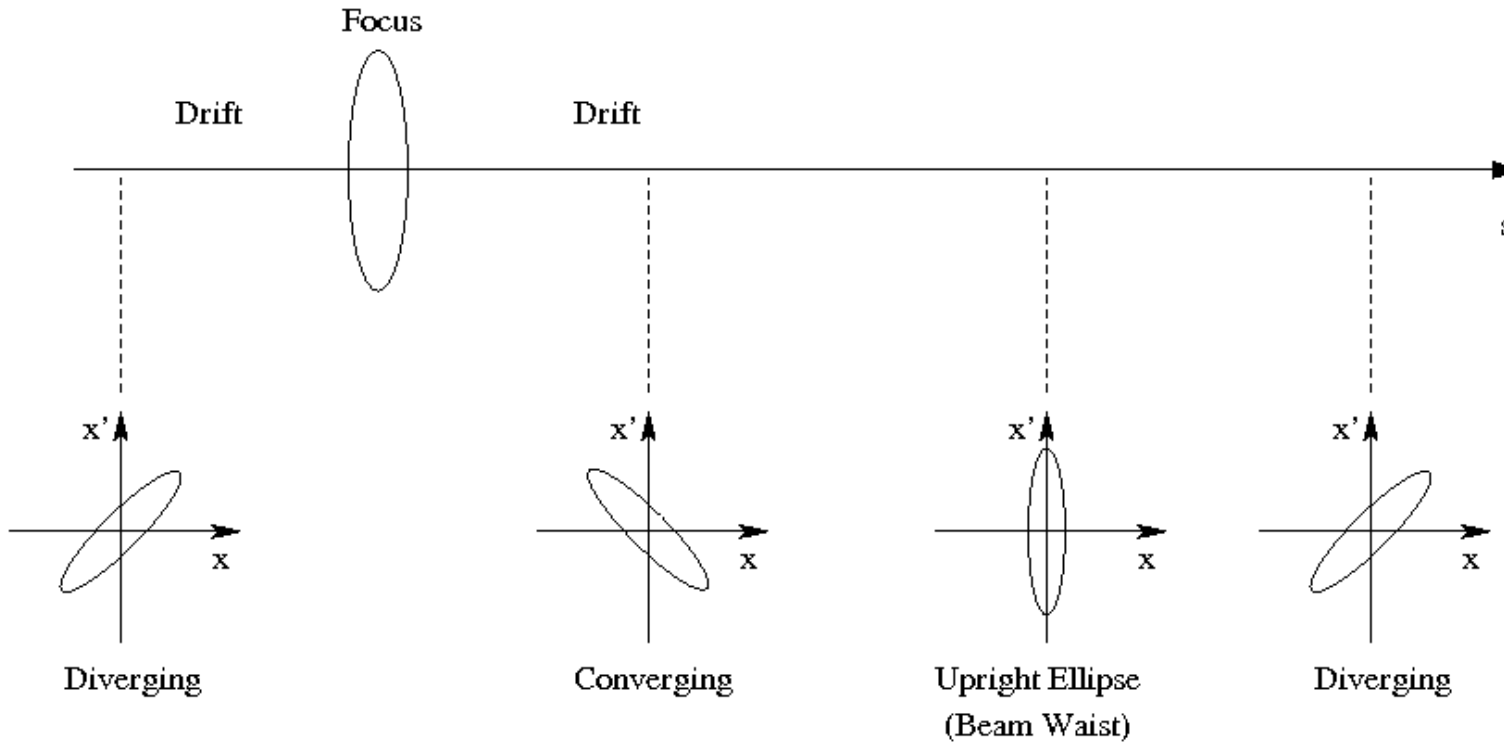

For further examples of phase-space ellipse evolutions in standard lattices, see: **S6G**

///

## S8: Hill's Equation: The Betatron Formulation of the Particle Orbit and Maximum Orbit Excursions S8A: Formulation

The **phase-amplitude** form of the particle orbit analyzed in **S6** of

$$x(s) = A_i w(s) \cos \psi(s) \quad [[w]] = (\text{meters})^{1/2}$$

is not a unique choice. Here,  $w$  has dimensions  $(\text{meters})^{1/2}$ , which can render it inconvenient in applications. Due to this and the utility of the Twiss parameters used in describing orientation of the phase-space ellipse associated with the Courant-Snyder invariant (see: **S7**) on which the particle moves, it is convenient to define an alternative, **Betatron** representation of the orbit with:

$$x(s) = \sqrt{\epsilon} \sqrt{\beta(s)} \cos \psi(s)$$

Betatron function:  $\beta(s) \equiv w^2(s)$

Emittance:  $\epsilon \equiv A_i^2 = \text{const}$

Phase:  $\psi(s) = \psi_i + \int_{s_i}^s \frac{d\tilde{s}}{\beta(\tilde{s})} = \psi_i + \Delta\psi(s)$

- ◆ The betatron function has dimensions  $[[\beta]] = \text{meters}$

## Comments:

- ◆ Use of the symbol  $\beta$  for the betatron function does not result in confusion with relativistic factors such as  $\beta_b$  since the context of use will make clear
  - Relativistic factors often absorbed in lattice focusing function and do not directly appear in the dynamical descriptions
- ◆ The initial phase  $\psi_i$  will differ in the  $w$ - and betatron phase-amplitude forms in order to match initial conditions in  $x$  and  $x'$  at
  - We do not distinguish for reasons of notational simplicity
- ◆ The change in phase  $\Delta\psi$  is the same for both formulations:

$$\Delta\psi(s) = \int_{s_i}^s \frac{d\tilde{s}}{w^2(\tilde{s})} = \int_{s_i}^s \frac{d\tilde{s}}{\beta(\tilde{s})}$$

Add material on initial condition correspondence in future editions of notes

From the equation for  $w$ :

$$w''(s) + \kappa(s)w(s) - \frac{1}{w^3(s)} = 0$$

$$w(s + L_p) = w(s) \quad w(s) > 0$$

the betatron function is described by:

$$\frac{1}{2}\beta(s)\beta'(s) - \frac{1}{4}\beta'^2(s) + \kappa(s)\beta^2(s) = 1$$

$$\beta(s + L_p) = \beta(s) \quad \beta(s) > 0$$

- The betatron function can, analogously to the  $w$ -function, as a special function defined by the periodic lattice
- Again, the equation is nonlinear and must generally be solved numerically

## S8B: Maximum Orbit Excursions

From the orbit equation

$$x = \sqrt{\epsilon\beta} \cos \psi$$

the **maximum** and **minimum** possible **particle excursions** occur where:

$$\cos \psi = +1 \quad \longrightarrow \quad \text{Max}[x] = \sqrt{\epsilon\beta(s)} = \sqrt{\epsilon}w(s)$$

$$\cos \psi = -1 \quad \longrightarrow \quad \text{Min}[x] = -\sqrt{\epsilon\beta(s)} = -\sqrt{\epsilon}w(s)$$

Thus, the max radial extent of *all* particle oscillations  $\text{Max}[x] \equiv x_m$  in the beam distribution occurs for the particle with the max single particle emittance since the particles move on nested ellipses:

$$\text{Max}[\epsilon] \equiv \epsilon_m$$

$$x_m(s) = \sqrt{\epsilon_m\beta(s)} = \sqrt{\epsilon_m}w(s)$$

- ◆ Assumes sufficient numbers of particles to populate all possible phases
- ◆  $x_m$  corresponds to the min possible machine aperture to prevent particle losses
  - Practical aperture choice influenced by: resonance effects due to nonlinear applied fields, space-charge, scattering, finite particle lifetime, ....

From:

$$w''(s) + \kappa(s)w(s) - \frac{1}{w^3(s)} = 0$$

$$w(s + L_p) = w(s) \quad w(s) > 0$$

We immediately obtain an equation for the maximum locus (envelope) of radial particle excursions  $x_m = \sqrt{\epsilon_m}w$  as:

$$x_m''(s) + \kappa(s)x_m(s) - \frac{\epsilon_m^2}{x_m^3(s)} = 0$$

$$x_m(s + L_p) = x_m(s) \quad x_m(s) > 0$$

Comments:

- ◆ Equation is **analogous to the statistical envelope equation** derived by J.J. Barnard in the **Intro Lectures** when a space-charge term is added and the max single particle emittance is interpreted as a statistical emittance
  - correspondence will become more concrete in later lectures
- ◆ This correspondence will be developed more extensively in later lectures on **Transverse Centroid and Envelope Descriptions of Beam Evolution** and **Transverse Equilibrium Distributions**

## S9: Momentum Spread Effects and Bending

### S9A: Formulation

Except for brief digressions in **S1** and **S4**, we have concentrated on particle dynamics where all particles have the design longitudinal momentum:

$$p_s = m\gamma_b\beta_b c = \text{const}$$

Realistically, there will always be a finite spread of particle momentum within a beam slice, so we take:

$$p_s = p_0 + \delta p$$

$$p_0 \equiv m\gamma_b\beta_b c = \text{Design Momentum}$$

$$\delta p \equiv \text{Off Momentum}$$

Typical values of momentum spread in a beam with a single species of particles with conventional sources and accelerating structures:

$$\frac{|\delta p|}{p_0} \sim 10^{-2} \rightarrow 10^{-6}$$

The spread of particle momentum can modify particle orbits, particularly when dipole bends are present since the bend radius depends strongly on the particle momentum



To better understand this effect, we analyze the particle equations of motion with leading-order momentum spread (see: **S1**) effects retained:

$$x''(s) + \left[ \frac{1}{R^2(s)} \frac{1 - \delta}{1 + \delta} + \frac{\kappa_x(s)}{(1 + \delta)^n} \right] x(s) = \frac{\delta}{1 + \delta} \frac{1}{R(s)}$$

$$y''(s) + \frac{\kappa_y(s)}{(1 + \delta)^n} y(s) = 0$$

Magnetic Dipole Bend

$R(s)$  = Local Bend Radius  
for design momentum  $p_0$   
( $R \rightarrow \infty$  in straight sections)

$$\frac{1}{R(s)} = \frac{B_y^a|_{\text{dipole}}}{[B\rho]}$$

$\delta \equiv \frac{\delta p}{p_0}$        $\kappa_{x,y}$  = Focusing Functions  
(using design momentum)

$$[B\rho] = \frac{p_0}{q}$$

$n = \begin{cases} 1, & \text{Magnetic Quadrupoles} \\ 2, & \text{Solenoids, Electric Quadrupoles} \end{cases}$

**Neglects:**

- ◆ **Space-charge:**  $\phi \rightarrow 0$
- ◆ **Nonlinear applied focusing:**  $\mathbf{E}^a, \mathbf{B}^a$  contain only linear focus terms
- ◆ **Acceleration:**  $p_0 = m\gamma_b\beta_b = \text{const}$

In the equations of motion, it is important to understand that  $B_y^a$  of the **magnetic bends** are set from the radius  $R$  required by the design particle orbit (see: **S1** for details)

- ◆ Equations must be modified slightly for electric bends (see **S1**)
- ◆ y-plane bends also require modification

The **focusing strengths** are defined with respect to the **design momentum**:

$$\kappa_x = \begin{cases} \frac{qG}{m\gamma_b\beta_b^2c^2}, & G = -\partial E_x^a/\partial x = \partial E_y^a/\partial y = \text{Electric Quad. Grad.} \\ \frac{qG}{m\gamma_b\beta_b c}, & G = \partial B_x^a/\partial y = \partial B_y^a/\partial x = \text{Magnetic Quad. Grad.} \\ \frac{qB_{z0}}{4m\gamma_b^2\beta_b^2c^2}, & B_{z0} = \text{Solenoidal Magnetic Field} \end{cases}$$

$\gamma_b, \beta_b$  calculated from  $p_0$

Terms in the equations of motion associated with momentum spread ( $\delta$ ) can be lumped into two classes:

- 1) **Chromatic** -- Associated with Focusing
- 2) **Dispersive** -- Associated with Dipole Bends

## S9B: Chromatic Effects

Present in both  $x$ - and  $y$ -equations of motion and result from applied focusing strength changing with deviations in momentum:

$$x''(s) + \frac{\kappa_x(s)}{(1 + \delta)^n} x(s) = 0$$

$$R \rightarrow \infty$$

$$y''(s) + \frac{\kappa_y(s)}{(1 + \delta)^n} y(s) = 0$$

to neglect bending terms

$\kappa_{x,y}$  = Focusing Functions  
with  $\gamma_b, \beta_b$  calculated from  $p_0$

- ◆ Generally of lesser importance (smaller corrections) relative to dispersive terms (S9C) *except* where the beam is focused onto a target (small spot) or when momentum spreads are large
- ◆ Lectures by J.J. Barnard on **Heavy Ion Fusion and Final Focusing** will overview consequences of chromatic effects in final focus optics

## S9C: Dispersive Effects

Present in only the  $x$ -equation of motion and **result from bending**. Neglecting chromatic terms:

$$x''(s) + \underbrace{\left[ \frac{1}{R^2(s)} \frac{1-\delta}{1+\delta} + \kappa_x(s) \right]}_{\text{Term 1}} x(s) = \underbrace{\frac{\delta}{1+\delta} \frac{1}{R(s)}}_{\text{Term 2}}$$

Particles are bent at different radii when the momentum deviates from the design value (  $\delta \neq 0$  ) leading to changes in the particle orbit

- ◆ Dispersive terms contain the bend radius  $R$

Generally, the bend radii  $R$  are large and  $\delta$  is small, and we can take to leading order:

$$\text{Term 1: } \left[ \frac{1}{R^2} \frac{1-\delta}{1+\delta} + \kappa_x \right] x \simeq \kappa_x x$$

$$\text{Term 2: } \frac{\delta}{1+\delta} \frac{1}{R} \simeq \frac{\delta}{R}$$

The equations of motion then become:

$$x''(s) + \kappa_x(s)x(s) = \frac{\delta}{R(s)}$$
$$y''(s) + \kappa_y(s)y(s) = 0$$

♦ The *y*-equation is not changed from the usual Hill's Equation

Generally, the *x*-equation is solved for periodic lattices by exploiting the linear structure of the equation and linearly resolving:

$$x(s) = x_h(s) + x_p(s)$$

$x_h \equiv$  Homogeneous Solution  
 $x_p \equiv$  Particular Solution

where  $x_h$  is the *general* solution to the Hill's Equation:

$$x_h''(s) + \kappa_x(s)x_h(s) = 0$$

and  $x_p$  is the *periodic* solution to:

$$x_p = \delta \cdot D$$

$D \equiv$  Dispersion Function

$$D''(s) + \kappa_x(s)D(s) = \frac{1}{R(s)}$$
$$D(s + L_p) = D(s)$$

This convenient resolution of the orbit  $x(s)$  can *always* be made because the homogeneous solution will be adjusted to match any initial condition

Note that  $\delta D$  provides a measure of the offset of the particle orbit relative to the design orbit resulting from a small deviation of momentum ( $\delta$ )


- ◆  $x(s) = 0$  defines the design orbit
- ◆  $[[D]] = \text{meters}$

$$\delta \cdot D = \text{Orbit offset in meters}$$

/// Example: Simple piecewise constant focusing and bending lattice


$$L_p = 0.5 \text{ m} \quad \kappa = 20/\text{m}^2 \text{ in Focusing}$$

$$\eta = 0.5 \quad R = 15 \text{ m, in bend, 25\% Occupancy}$$

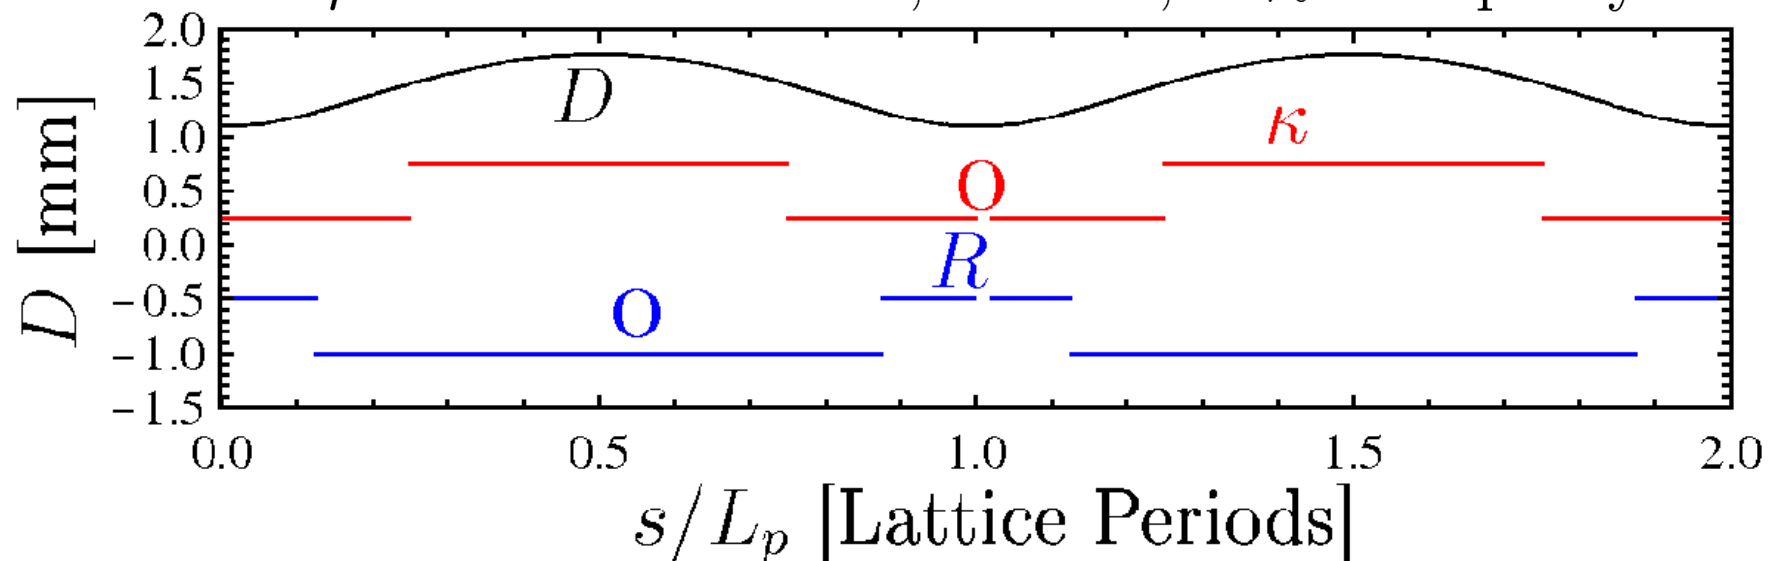


/// Example: Dispersion broadens the  $x$ -distribution

Uniform Bundle of particles  $D = 0$

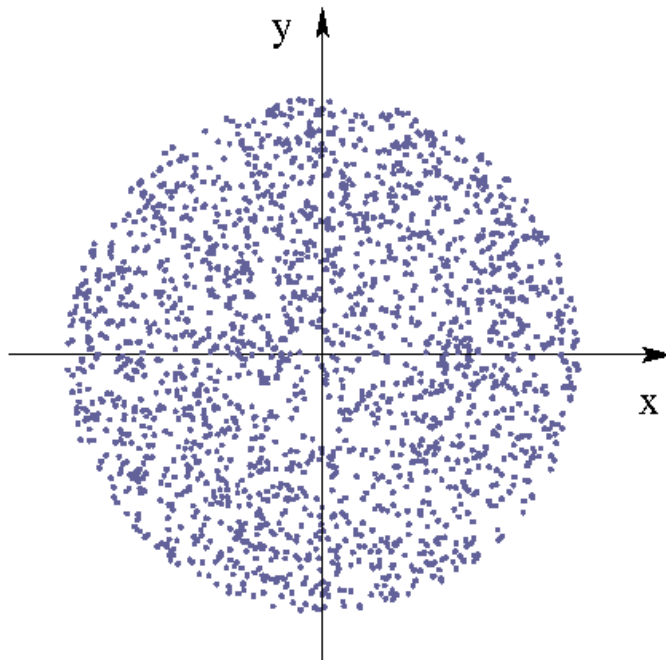


Same Bundle of particles  $D \neq 0$

- ◆ Gaussian distribution of momentum spread distorts the  $x$ - $y$  distribution extends in  $x$  but not in  $y$

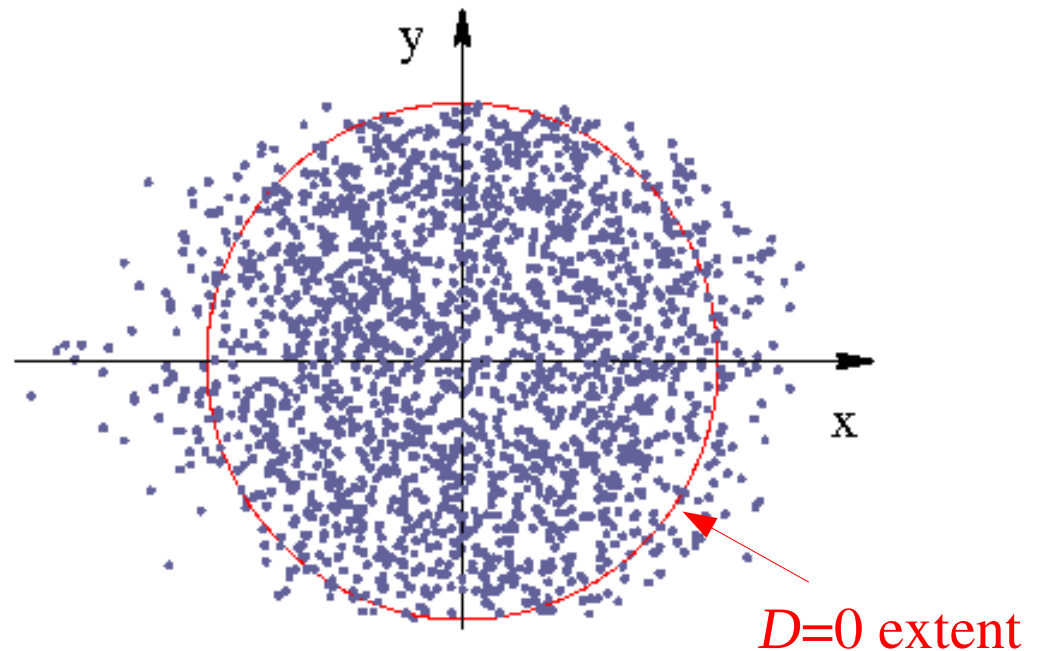

Many **rings** are designed to focus the dispersion function  $D(s)$  to small values in straight sections even though the lattice has strong bends

- ◆ Desirable since it allows smaller beam sizes at locations near where  $D = 0$  and these locations can be used to insert and extract (kick) the beam into and out of the ring with minimal losses
  - Since average value of  $D$  is dictated by ring size and focusing strength (see example next page) this variation in values can lead to  $D$  being larger in other parts of the ring
- ◆ Quadrupole triplet focusing lattices are often employed in rings since the optics allows sufficient flexibility to tune  $D$  while simultaneously allowing particle phase advances to also be adjusted

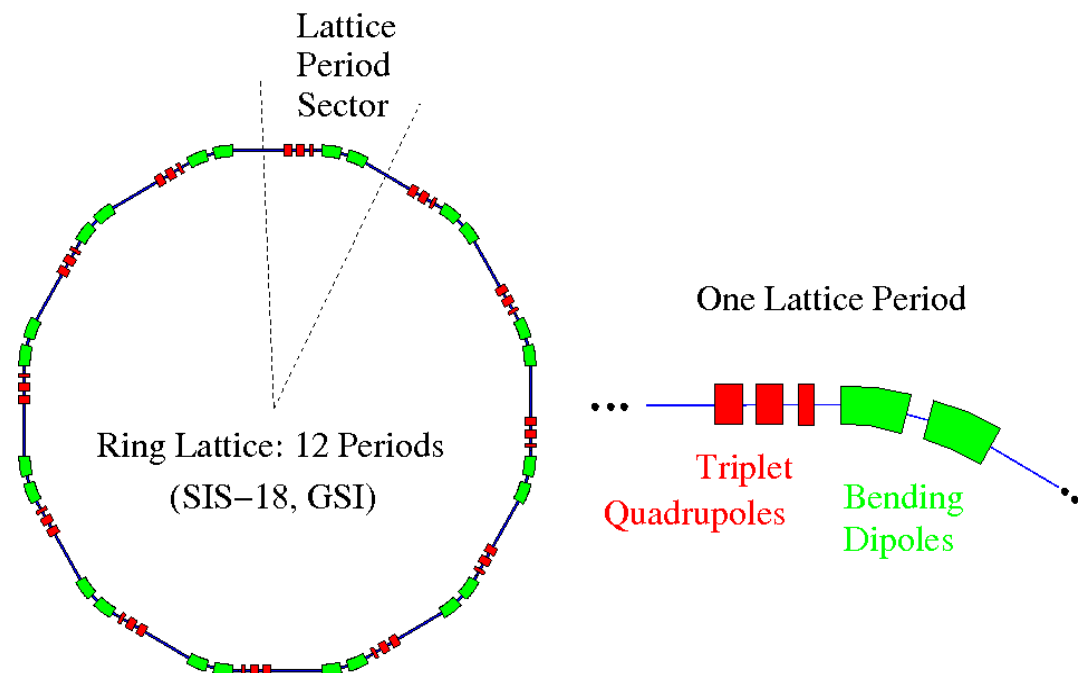



### /// Example: Continuous Focusing in a Continuous Bend

$$\kappa_x(s) = k_{\beta 0}^2 = \text{const}$$

$$R(s) = R = \text{const}$$

Dispersion equation becomes:

$$D'' + k_{\beta 0}^2 D = \frac{1}{R}$$

With solution:

$$D = \frac{1}{k_{\beta 0}^2 R} = \text{const}$$

From this result we can crudely estimate the average value of the dispersion function in a ring with periodic focusing by taking:

$R$  = Avg Radius Ring

$L_p$  = Lattice Period (Focusing)

$\sigma_{0x}$  =  $x$ -Plane Phase Advance

$$\implies k_{\beta 0} \sim \frac{\sigma_0}{L_p} \implies D \sim \frac{L_p^2}{\sigma_0^2 R}$$

///

# S10: Acceleration and Normalized Emittance

## S10A: Introduction

If the beam is **accelerated** longitudinally in a linear focusing channel, the  $x$ -particle equation of motion (see: **S1** and **S2**) is:

$$x'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} x' + \kappa_x x = - \frac{q}{m \gamma_b^3 \beta_b^2 c^2} \frac{\partial \phi}{\partial x}$$

Analogous equation holds in  $y$

### Neglects:

- ◆ Nonlinear applied focusing fields
- ◆ Momentum spread effects

### Comments:

- ◆  $\gamma_b, \beta_b$  are regarded as **prescribed functions** of  $s$  set by the **acceleration schedule** of the machine
- ◆ Variations in  $\gamma_b, \beta_b$  due to acceleration must be included in and/or compensated by adjusting the strength of the optics via  $\kappa_x, \kappa_y$ 
  - Scaling different for electric and magnetic optics (see: **S2**)

## Comments Continued:

- ◆ In typical accelerating systems, changes in  $\gamma_b\beta_b$  are slow and the fractional changes in the orbit induced by acceleration are small
  - Exception near an injector since the beam is often not yet energetic
- ◆ The acceleration term:

$$\frac{(\gamma_b\beta_b)'}{(\gamma_b\beta_b)} > 0$$

will act to damp particle oscillations (see following slides for motivation)

Even with acceleration, we will find that there is a Courant-Snyder invariant (normalized emittance) that is valid in an analogous context as in the case without acceleration provided phase-space coordinates are chosen to compensate for the damping of particle oscillations

## Acceleration Factor: Characteristics of Relativistic Factor

$$\gamma_b \beta_b \simeq \begin{cases} \gamma_b, & \text{Relativistic Limit} \\ \beta_b, & \text{Nonrelativistic Limit} \end{cases}$$

$$\gamma_b \equiv \frac{1}{\sqrt{1 - \beta_b^2}}$$

Beam/Particle Kinetic Energy:

$$\mathcal{E}_b(s) = (\gamma_b - 1)mc^2 = \text{Beam Kinetic Energy}$$

- ◆ Function of  $s$  specified by Acceleration schedule for transverse dynamics
- ◆ See **Appendix D** for calculation of  $\mathcal{E}_b$  and  $\gamma_b \beta_b$  from longitudinal dynamics and J.J. Barnard lectures on **Longitudinal Dynamics**

Approximate energy gain from average gradient:

$$\mathcal{E}_b \simeq \mathcal{E}_i + G(s - s_i)$$

$\mathcal{E}_i = \text{const} = \text{Initial Energy}$

$G = \text{const} = \text{Average Gradient}$

- ◆ Real energy gain will be rapid when going through discreet acceleration gaps

$$\mathcal{E}_b \simeq \begin{cases} \gamma_b mc^2, & \text{Relativistic Limit, } \gamma_b \gg 1 \\ \frac{1}{2} m \beta_b^2 c^2, & \text{Nonrelativistic Limit, } |\beta_b| \ll 1 \end{cases}$$

Identify relativistic factor with average gradient energy gain:

**Relativistic Limit:**  $\gamma_b \gg 1$

$$\gamma_b \simeq \frac{\mathcal{E}_b}{mc^2} = \frac{\mathcal{E}_i}{mc^2} + \frac{G}{mc^2}(s - s_i)$$

$$\implies \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \simeq \frac{\gamma_b'}{\gamma_b} \simeq \frac{1}{\left(\frac{\mathcal{E}_i}{G} - s_i\right) + s} \sim \frac{1}{s}$$

**Nonrelativistic Limit:**  $|\beta_b| \ll 1$

$$\beta_b \simeq \sqrt{2 \frac{\mathcal{E}_b}{mc^2}} = \sqrt{2 \frac{\mathcal{E}_i}{mc^2} + 2 \frac{G}{mc^2}(s - s_i)}$$

$$\implies \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \simeq \frac{\beta_b'}{\beta_b} = \frac{1/2}{\left(\frac{\mathcal{E}_i}{G} - s_i\right) + s} \sim \frac{1}{2s}$$

- ◆ Expect **Relativistic** and **Nonrelativistic** motion to have similar solutions
  - Parameters for each case will often be quite different

/// Aside: **Acceleration and Continuous Focusing Orbits** with  $\kappa_x = k_{\beta 0}^2 = \text{const}$   
 Assume relativistic motion and negligible space-charge:

$$\frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \simeq \frac{\gamma_b'}{\gamma_b} = \frac{1}{\left(\frac{\mathcal{E}_i}{G} - s_i\right) + s} \quad \frac{\partial \phi}{\partial x} \simeq 0$$

Then the equation of motion reduces to:

$$x'' + \frac{1}{\left(\frac{\mathcal{E}_i}{G} - s_i\right) + s} x' + k_{\beta 0}^2 x = 0$$

This equation is the equation of a Bessel Function of order zero:

$$\frac{d^2 x}{d\xi^2} + \frac{1}{\xi} \frac{dx}{d\xi} + x = 0 \quad \xi = k_{\beta 0} s + k_{\beta 0} \left(\frac{\mathcal{E}_i}{G} - s_i\right)$$

$$x = C_1 J_0(\xi) + C_2 Y_0(\xi) \quad C_1 = \text{const} \quad C_2 = \text{const}$$

$$x' = -C_1 k_{\beta 0} J_1(\xi) - C_2 k_{\beta 0} Y_1(\xi) \quad J_n = \text{Order } n \text{ Bessel Func (1st kind)}$$

$$Y_n = \text{Order } n \text{ Bessel Func (2nd kind)}$$

Solving for the constants in terms of the particle initial conditions:

$$\begin{bmatrix} x_i \\ x'_i \end{bmatrix} = \begin{bmatrix} J_0(\xi_i) & Y_0(\xi_i) \\ -k_{\beta 0} J_1(\xi_i) & -k_{\beta 0} Y_1(\xi_i) \end{bmatrix} \cdot \begin{bmatrix} C_1 \\ C_2 \end{bmatrix}$$

$$\begin{aligned} x_i &\equiv x(s = s_i) & \xi_i &\equiv k_{\beta 0} \frac{\mathcal{E}_i}{G} = \xi(s = s_i) \\ x'_i &\equiv x'(s = s_i) \end{aligned}$$

Invert matrix to solve for constants in terms of initial conditions:

$$\implies \begin{bmatrix} C_1 \\ C_2 \end{bmatrix} = \frac{1}{\Delta} \begin{bmatrix} -k_{\beta 0} Y_1(\xi_i) & -Y_0(\xi_i) \\ k_{\beta 0} J_1(\xi_i) & J_0(\xi_i) \end{bmatrix} \cdot \begin{bmatrix} x_i \\ x'_i \end{bmatrix}$$

$$\Delta \equiv k_{\beta 0} [Y_0(\xi_i) J_1(\xi_i) - J_0(\xi_i) Y_1(\xi_i)]$$

### Comments:

- ♦ Bessel functions behave like damped harmonic oscillators
  - See any texts on Mathematical Physics or Applied Mathematics
- ♦ Nonrelativistic limit solution is *not* described by a Bessel Function solution
  - Properties of solution will be similar though (similar special function)
  - The coefficient in the damping term  $\propto x'$  has a factor of 2 difference, preventing exact Bessel function form

Using this solution, plot the orbit for (contrived parameters for illustration only):

$$k_{\beta 0} = \frac{\sigma_0}{L_p}$$

$$\sigma_0 = 90^\circ / \text{Period}$$

$$\mathcal{E}_i = 1000 \text{ MeV}$$

$$L_p = 0.5 \text{ m}$$



$$G = 100 \text{ MeV/m}$$

$$x(0) = 10 \text{ mm}$$

$$s_i = 0$$

$$x'(0) = 0 \text{ mrad}$$

$$\frac{\gamma_{bi}}{\gamma_b} = \frac{1}{1 + (G/\mathcal{E}_i)(s - s_i)}$$

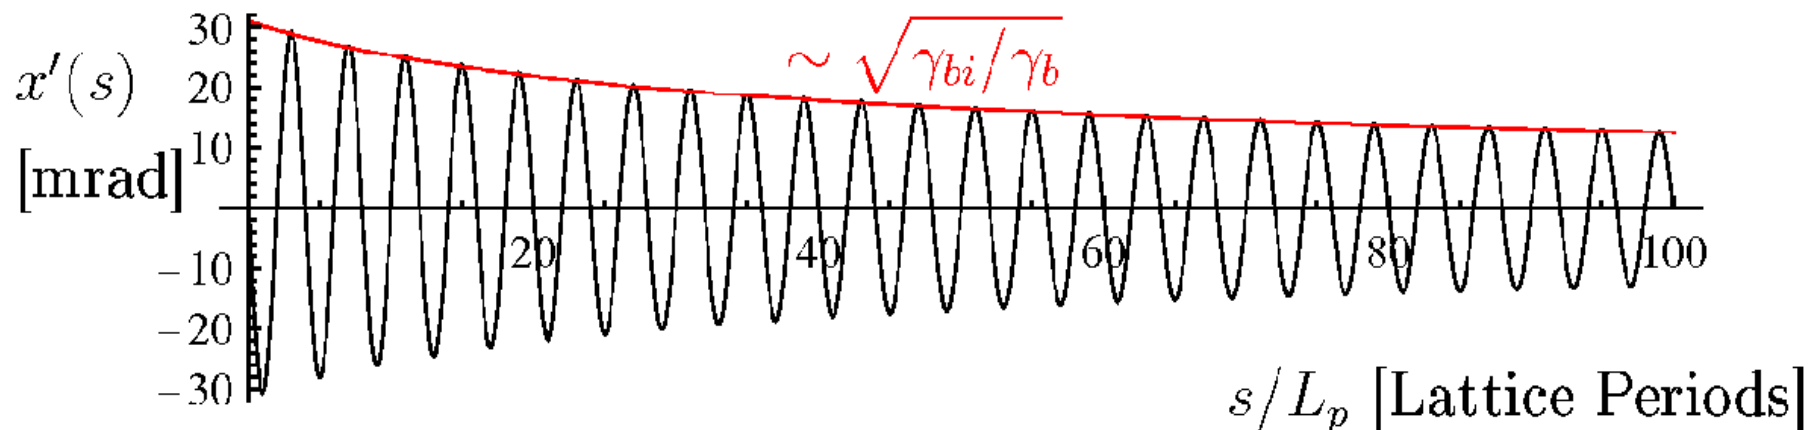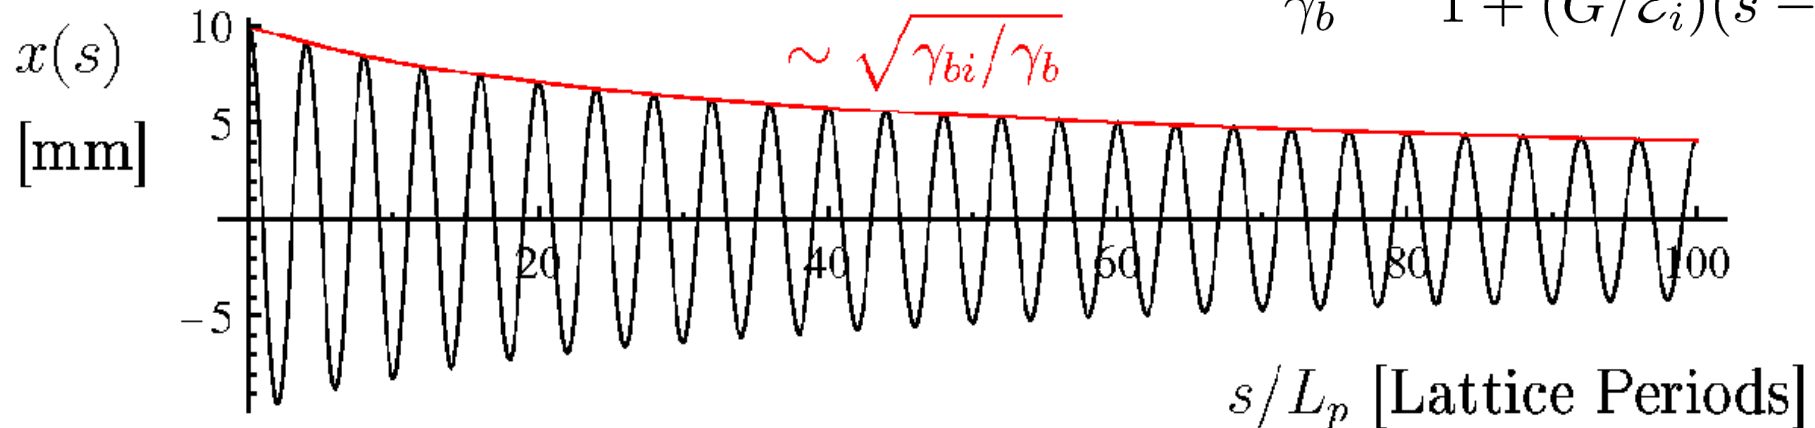

◆ Solution shows damping: phase volume scaling  $\sim 1/(\gamma_b \beta_b) \simeq 1/\gamma_b$  ///



## S10B: Transformation to Normal Form

“Guess” transformation to apply motivated by conjugate variable arguments  
(see: J.J. Barnard, **Intro. Lectures**)

$$\tilde{x} \equiv \sqrt{\gamma_b \beta_b} x$$

Then:

$$x = \frac{1}{\sqrt{\gamma_b \beta_b}} \tilde{x}$$
$$x' = \frac{1}{\sqrt{\gamma_b \beta_b}} \tilde{x}' - \frac{1}{2} \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)^{3/2}} \tilde{x}$$
$$x'' = \frac{1}{\sqrt{\gamma_b \beta_b}} \tilde{x}'' - \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)^{3/2}} \tilde{x}' + \left[ \frac{3}{4} \frac{(\gamma_b \beta_b)'^2}{(\gamma_b \beta_b)^{5/2}} - \frac{1}{2} \frac{(\gamma_b \beta_b)''}{(\gamma_b \beta_b)^{3/2}} \right] \tilde{x}$$

The inverse phase-space transforms will also be useful later:

$$\tilde{x} = \sqrt{\gamma_b \beta_b} x$$
$$\tilde{x}' = \sqrt{\gamma_b \beta_b} x' + \frac{1}{2} \frac{(\gamma_b \beta_b)'}{\sqrt{\gamma_b \beta_b}} x$$

Applying these results, the particle x- **equation of motion with acceleration** becomes:

$$\tilde{x}'' + \left[ \kappa_x + \frac{1}{4} \frac{(\gamma_b \beta_b)'^2}{(\gamma_b \beta_b)^2} - \frac{1}{2} \frac{(\gamma_b \beta_b)''}{(\gamma_b \beta_b)} \right] \tilde{x} = - \frac{q}{m \gamma_b^2 \beta_b c^2} \frac{\partial \phi}{\partial \tilde{x}}$$

**Note:**

- ◆ Factor of  $\gamma_b \beta_b$  difference from untransformed expression in the space-charge coupling coefficient

It is instructive to also transform the **Possion equation** associated with the space-charge term:

$$\left( \frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} \right) \phi = - \frac{\rho}{\epsilon_0}$$

Transform:

$$\frac{\partial^2}{\partial x^2} = \left( \frac{\partial \tilde{x}}{\partial x} \frac{\partial}{\partial \tilde{x}} \right) \left( \frac{\partial \tilde{x}}{\partial x} \frac{\partial}{\partial \tilde{x}} \right) = \gamma_b \beta_b \frac{\partial^2}{\partial \tilde{x}^2}$$

$$\frac{\partial^2}{\partial y^2} = \left( \frac{\partial \tilde{y}}{\partial y} \frac{\partial}{\partial \tilde{y}} \right) \left( \frac{\partial \tilde{y}}{\partial y} \frac{\partial}{\partial \tilde{y}} \right) = \gamma_b \beta_b \frac{\partial^2}{\partial \tilde{y}^2}$$

Using these results, Poisson's equation becomes:

$$\left( \frac{\partial^2}{\partial \tilde{x}^2} + \frac{\partial^2}{\partial \tilde{y}^2} \right) \phi = -\frac{\rho}{\gamma_b \beta_b \epsilon_0}$$

Or defining a **transformed potential**  $\tilde{\phi}$

$$\tilde{\phi} = \gamma_b \beta_b \phi$$

$$\left( \frac{\partial^2}{\partial \tilde{x}^2} + \frac{\partial^2}{\partial \tilde{y}^2} \right) \tilde{\phi} = -\frac{\rho}{\epsilon_0}$$

Applying these results, the **x-equation of motion with acceleration** becomes:

$$\tilde{x}'' + \left[ \kappa_x + \frac{1}{4} \frac{(\gamma_b \beta_b)'^2}{(\gamma_b \beta_b)^2} - \frac{1}{2} \frac{(\gamma_b \beta_b)''}{(\gamma_b \beta_b)} \right] \tilde{x} = -\frac{q}{m \gamma_b^3 \beta_b^2 c^2} \frac{\partial \tilde{\phi}}{\partial \tilde{x}}$$

- Usual form of the space-charge coefficient with  $\gamma_b^3 \beta_b^2$  rather than  $\gamma_b^2 \beta_b$  is restored when expressed in terms of the transformed potential  $\tilde{\phi}$

An additional step can be taken to further stress the correspondence between the transformed system with acceleration and the untransformed system in the absence of acceleration.

Denote an **effective focusing strength**:

$$\tilde{\kappa}_x \equiv \kappa_x + \frac{1}{4} \frac{(\gamma_b \beta_b)'^2}{(\gamma_b \beta_b)^2} - \frac{1}{2} \frac{(\gamma_b \beta_b)''}{(\gamma_b \beta_b)}$$

$\tilde{\kappa}_x$  incorporates acceleration terms beyond  $\gamma_b$ ,  $\beta_b$  factors already included in the definition of  $\kappa_x$  (see: **S2**):

$$\kappa_x = \begin{cases} \frac{qG}{m\gamma_b\beta_b^2c^2}, & G = -\partial E_x^a/\partial x = \partial E_y^a/\partial y = \text{Electric Quad. Grad.} \\ \frac{qG}{m\gamma_b\beta_b c}, & G = \partial B_x^a/\partial y = \partial B_y^a/\partial x = \text{Magnetic Quad. Grad.} \\ \frac{qB_{z0}}{4m\gamma_b^2\beta_b^2c^2}, & B_{z0} = \text{Solenoidal Magnetic Field} \end{cases}$$

The **transformed equation of motion with acceleration** then becomes:

$$\tilde{x}'' + \tilde{\kappa}_x \tilde{x} = -\frac{q}{m\gamma_b^3\beta_b^2c^2} \frac{\partial \tilde{\phi}}{\partial \tilde{x}}$$

The transformed equation **with acceleration** has the same form as the equation in the **absence of acceleration**. If space-charge is negligible ( $\partial\phi/\partial\mathbf{x}_\perp \simeq 0$ ) we have:

Accelerating System

Non-Accelerating System

$$\tilde{x}'' + \tilde{\kappa}_x \tilde{x} = 0 \quad \iff \quad x'' + \kappa_x x = 0$$

Therefore, *all previous analysis* on **phase-amplitude methods** and **Courant-Snyder invariants** associated with Hill's equation in  $x-x'$  phase-space can be immediately applied to  $\tilde{x} - \tilde{x}'$  phase-space for an **accelerating beam**

$$\left( \frac{\tilde{x}}{\tilde{w}_x} \right)^2 + (\tilde{w}_x \tilde{x}' - \tilde{w}_x' \tilde{x})^2 = \tilde{\epsilon} = \text{const}$$

$$\tilde{w}_x'' + \tilde{\kappa} \tilde{w}_x - \frac{1}{\tilde{w}_x^3} = 0$$

$$\tilde{w}_x(s + L_p) = \tilde{w}_x(s)$$

$$\pi \tilde{\epsilon} = \text{Area traced by orbit} = \text{const}$$

in  $\tilde{x}-\tilde{x}'$  phase-space

- ◆ Focusing field strengths need to be adjusted to maintain periodicity of  $\kappa_x$  in the presence of acceleration
  - Not possible to do exactly, but can be approximate for weak acceleration

## S10C: Phase Space Relation Between Transformed and UnTransformed Systems

It is instructive to relate the transformed phase-space area in tilde variables to the usual  $x$ - $x'$  phase area:

$$d\tilde{x} \otimes d\tilde{x}' = |J| dx \otimes dx'$$

where  $J$  is the Jacobian:

$$\begin{aligned} J &\equiv \det \begin{bmatrix} \frac{\partial \tilde{x}}{\partial x} & \frac{\partial \tilde{x}}{\partial x'} \\ \frac{\partial \tilde{x}'}{\partial x} & \frac{\partial \tilde{x}'}{\partial x'} \end{bmatrix} \\ &= \det \begin{bmatrix} \sqrt{\gamma_b \beta_b} & 0 \\ \frac{1}{2} \frac{(\gamma_b \beta_b)'}{\sqrt{\gamma_b \beta_b}} & \sqrt{\gamma_b \beta_b} \end{bmatrix} = \gamma_b \beta_b \end{aligned}$$

Thus:

$$d\tilde{x} \otimes d\tilde{x}' = \gamma_b \beta_b dx \otimes dx'$$

Inverse transforms  
derived previously:

$$\begin{aligned} \tilde{x} &= \sqrt{\gamma_b \beta_b} x \\ \tilde{x}' &= \sqrt{\gamma_b \beta_b} x' + \frac{1}{2} \frac{(\gamma_b \beta_b)'}{\sqrt{\gamma_b \beta_b}} x \end{aligned}$$

Based on this area transform, if we define the (instantaneous) phase space area of the orbit trace in  $x-x'$  to be  $\pi\epsilon_x$  “regular emittance”, then this emittance is related to the “normalized emittance”  $\tilde{\epsilon}_x$  in  $\tilde{x} - \tilde{x}'$  phase-space by:

$$\begin{aligned}\tilde{\epsilon}_x &= \gamma_b \beta_b \epsilon_x \\ &\equiv \text{Normalized Emittance} \equiv \epsilon_{nx}\end{aligned}$$

- ◆ Factor  $\gamma_b \beta_b$  compensates for acceleration induced damping in particle orbits
- ◆ Normalized emittance is very important in design of lattices to transport accelerating beams
  - Designs usually made assuming conservation of normalized emittance
- ◆ Same result that J.J. Barnard motivated in the **Intro. Lectures** using alternative methods

## Appendix D: Accelerating Fields and Calculation of Changes in $\gamma\beta$

The transverse particle equation of motion with acceleration was derived in a Cartesian system by approximating (see: S1):

$$\frac{d}{dt} \left( m\gamma \frac{d\mathbf{x}_\perp}{dt} \right) \simeq q\mathbf{E}_\perp^a + q\beta_b c \hat{\mathbf{z}} \times \mathbf{B}_\perp^a + qB_z^a \mathbf{v}_\perp \times \hat{\mathbf{z}} - q \frac{1}{\gamma_b^2} \frac{\partial \phi}{\partial \mathbf{x}_\perp}$$

using

$$m \frac{d}{dt} \left( \gamma \frac{d\mathbf{x}_\perp}{dt} \right) \simeq m\gamma_b \beta_b^2 c^2 \left[ \mathbf{x}_\perp'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \mathbf{x}_\perp' \right]$$

to obtain:

$$\mathbf{x}_\perp'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \mathbf{x}_\perp' = \frac{q}{m\gamma_b \beta_b^2 c^2} \mathbf{E}_\perp^a + \frac{q}{m\gamma_b \beta_b c} \hat{\mathbf{z}} \times \mathbf{B}_\perp^a + \frac{qB_z^a}{m\gamma_b \beta_b c} \mathbf{x}_\perp' \times \hat{\mathbf{z}} - \frac{q}{\gamma_b^3 \beta_b^2 c^2} \frac{\partial}{\partial \mathbf{x}_\perp} \phi$$

D1



Changes in  $\gamma_b\beta_b$  are calculated from the **longitudinal particle equation of motion**:

$$\frac{d}{dt} \left( m\gamma \frac{dz}{dt} \right) \simeq \underbrace{qE_z^a}_{\text{Term 1}} - \underbrace{q(v_x B_y^a - v_y B_x^a)}_{\text{Term 2}} - \underbrace{q \frac{\partial \phi}{\partial z}}_{\text{Term 3}}$$

Using steps similar to those in **S1**, we approximate terms:

**Term 1:**  $\frac{d}{dt} \left( \gamma \frac{dz}{dt} \right) \simeq c^2 \beta_b (\gamma_b \beta_b)'$        $\frac{dz}{dt} = v_z \simeq \beta_b c$        $\gamma \simeq \gamma_b$   
 $\frac{d}{dt} \simeq \beta_b c \frac{d}{ds}$

**Term 2:**  $\frac{q}{m} E_z^a \simeq -\frac{q}{m} \frac{\partial \phi^a}{\partial s} \Big|_{x=y=0}$

◆  $\phi^a$  is a quasi-static approximation accelerating potential (see next pages)

**Term 3:**  $-q(v_x B_y^a - v_y B_x^a) = -q \left( \frac{dx}{dt} B_y^a - \frac{dy}{dt} B_x^a \right) \simeq 0$

◆ Transverse magnetic fields typically only weakly change particle energy and terms can be neglected relative to others

**D2**

The longitudinal particle equation of motion for  $\gamma_b$ ,  $\beta_b$  then reduces to:

$$\beta_b(\gamma_b\beta_b)' \simeq - \frac{q}{mc^2} \frac{\partial\phi^a}{\partial s} \Big|_{x=y=0}$$

Some algebra then shows that:

$$\gamma_b' = \left( \frac{1}{\sqrt{1-\beta_b^2}} \right)' = \gamma_b^3 \beta_b \beta_b'$$

$$\begin{aligned} \implies \beta_b(\gamma_b\beta_b)' &= \beta_b^2 \gamma_b' + \gamma_b \beta_b \beta_b' \\ &= (1 + \gamma_b^2 \beta_b^2) \gamma_b \beta_b \beta_b' = \gamma_b^3 \beta_b \beta_b' \\ &= \gamma_b' \end{aligned}$$

Giving:

$$\gamma_b' = - \frac{q}{mc^2} \frac{\partial\phi^a}{\partial s} \Big|_{x=y=0}$$

Which can then be integrated to obtain:

$$\gamma_b = \frac{q}{mc^2} \phi^a(r=0, z=s) + \text{const} \quad \beta_b = \sqrt{1 + 1/\gamma_b^2}$$

D3

We denote the on-axis accelerating potential as:

$$V(s) \equiv \phi^a(x = y = 0, z = s)$$

- ◆ Can represent RF or induction accelerating gap fields
- ◆ See: J.J. Barnard lectures for more details

Giving:

$$\gamma_b = \frac{q}{mc^2} V(s) + \text{const} \quad \beta_b = \sqrt{1 + 1/\gamma_b^2}$$

These equations can be solved for the consistent variation of  $\gamma_b(s)$ ,  $\beta_b(s)$  in the **transverse equations of motion**:

$$\mathbf{x}_{\perp}'' + \frac{(\gamma_b \beta_b)'}{(\gamma_b \beta_b)} \mathbf{x}_{\perp}' = \frac{q}{m \gamma_b \beta_b^2 c^2} \mathbf{E}_{\perp}^a + \frac{q}{m \gamma_b \beta_b c} \hat{\mathbf{z}} \times \mathbf{B}_{\perp}^a + \frac{q B_z^a}{m \gamma_b \beta_b c} \mathbf{x}_{\perp}' \times \hat{\mathbf{z}} - \frac{q}{\gamma_b^3 \beta_b^2 c^2} \frac{\partial}{\partial \mathbf{x}_{\perp}} \phi$$

## Nonrelativistic limit results

In the **nonrelativistic** limit:

$$\gamma_b \simeq 1 + \frac{1}{2}\beta_b^2 \quad \beta_b^2 \ll 1$$

Giving the familiar result of a nonrelativistic particle gaining energy when falling down a potential gradient:

$$\frac{1}{2}m\beta_b^2 c^2 \simeq q\phi^a(r=0, z=s) + \text{const} \quad \beta_b^2 \ll 1$$

Using this result, in the nonrelativistic limit we can take in the transverse particle equation of motion:

$$\frac{(\gamma_b\beta_b)'}{(\gamma_b\beta_b)} \simeq \frac{1}{2} \frac{V'}{V}$$

## Quasistatic potential expansion

In the quasistatic approximation, the accelerating potential can be expanded in the axisymmetric limit as:

- ♦ See: J.J. Barnard, **Intro Lectures**; and Reiser, *Theory and Design of Charged Particle Beams*, (1994, 2008) Sec. 3.3.

$$\phi^a = V(z) - \frac{1}{4} \frac{\partial^2}{\partial z^2} V(z) (x^2 + y^2) + \frac{1}{64} \frac{\partial^4}{\partial z^4} V(z) (x^2 + y^2)^2 + \dots$$

The **longitudinal acceleration** also result in a **transverse focusing** field

$$\mathbf{E}_{\perp}^a = \mathbf{E}_{\perp}^a|_{\text{foc}} - \frac{\partial \phi^a}{\partial \mathbf{x}_{\perp}}$$

$$\mathbf{E}_{\perp}^a|_{\text{foc}} = \text{Fields from Focusing Optics}$$

$$-\frac{\partial \phi^a}{\partial \mathbf{x}_{\perp}} = \frac{1}{2} \frac{\partial^2}{\partial z^2} V(z) \mathbf{x}_{\perp} = \text{Focusing Field from Acceleration}$$

- ♦ Results can be used to cast acceleration terms in more convenient forms. See J.J. Barnard lectures for more details.

D6

These notes will be corrected and expanded for reference and future editions of US Particle Accelerator School and University of California at Berkeley courses:

*“Beam Physics with Intense Space Charge”*

*“Interaction of Intense Charged Particle Beams  
with Electric and Magnetic Fields”*

by J.J. Barnard and S.M. Lund

Corrections and suggestions for improvements are welcome. Contact:

Steven M. Lund  
Lawrence Berkeley National Laboratory  
BLDG 47 R 0112  
1 Cyclotron Road  
Berkeley, CA 94720-8201

[SMLund@lbl.gov](mailto:SMLund@lbl.gov)  
(510) 486 – 6936

Please do not remove author credits in any redistributions of class material.

## References: For more information see:

Earlier versions of course notes posted online (present will also be posted with corrections):

J. Barnard and S. Lund, *Intense Beam Physics*, US Particle Accelerator School Notes, [http://uspas.fnal.gov/lect\\_note.html](http://uspas.fnal.gov/lect_note.html) (2006, 2004)

Basic introduction on many of the topics covered:

M. Reiser, *Theory and Design of Charged Particle Beams*, Wiley (1994, revised 2008)

Review by author (with similar perspective to notes) with material on phase advances, lattice focusing strength, etc.

S.M. Lund and B. Bukh, Stability Properties of the Transverse Envelope Equations Describing Intense Ion Beam Transport, *Phys. Rev. Special Topics – Accelerators and Beams* (2004).

Hill's Equation, Floquet's theorem, Courant-Snyder invariants, and dispersion functions: H. Wiedermann, *Particle Accelerator Physics*, Springer-Verlag (1995)

Particle equations of motion with bends and momentum spread:

D.A. Edwards and M.J. Syphers, *An Introduction to the Physics of High Energy Accelerators*, Wiley (1993).

Original, classic paper on strong focusing and Courant-Snyder invariants applied to accelerator physics. Remains one of the best formulated treatments to date:

E.D. Courant and H. S. Snyder, Theory of the Alternating Gradient Synchrotron, *Annals Physics* **3**, 1 (1958).

More mathematical treatment of transfer matrices and stability

A. Dragt, *Lectures on Nonlinear Orbit Dynamics*, in “Physics of High Energy Accelerators,” edited by R.A. Carrigan, F.R. Hudson, and M. Month (AIP Conf. Proc. No. 87, New York, 1982), p. 147.

Phase-amplitude methods, Larmor frame:

J.D. Lawson, *The Physics of Charged Particle Beams*, Oxford University Press (1977).

Solenoidal focusing and the Larmor frame:

H. Wiedemann, *Particle Accelerator Physics II: Nonlinear and Higher Order Beam Dynamics*, Springer (1995).



# Acknowledgments:

Klaus Halbach educated one of the authors (S.M. Lund) on the use of complex variable theory to simplify analysis of multipole fields employed in

**S3: Description of Applied Focusing Fields.**

Considerable help was provided by Giuliano Franchetti (GSI) in educating one of the authors (S.M. Lund) in phase-amplitude methods described in this lecture.

Edward P. Lee (LBNL) helped formulate parts of material presented in

**S10: Acceleration and Normalized Emittance.**